

两端外螺纹型 · 带扳手槽型


D公差f8 普通级

导向轴

代码	类型	精度等级	D公差	材质		硬度	表面处理
				国标	相当		
Y-FCK11	带扳手槽型	普通级	f8	45	S45C	—	镀硬铬, 镀层硬度HV750~ 镀层厚度3μm~
Y-FCK14				0Cr18Ni9	SUS304		



注意: A·B=0时, 无外螺纹。

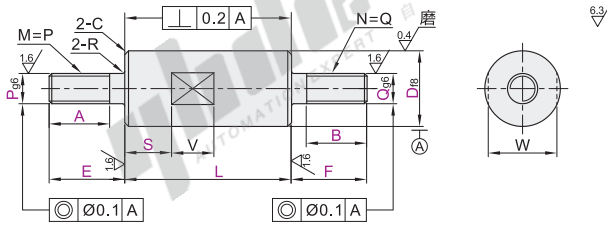

圆度/直线度/垂直度/同轴度/硬度变化/铬层分布, 请参阅导向轴产品简介。



代码	型号	D _{f8}	最小单位1			P,Q 选择	扳手槽尺寸			R	C
			L	E·F	A·B		S	W	V		
(D公差f8) Y-FCK11 Y-FCK14	6	-0.018 -0.028	20~600			3 4 5		5			
	8	-0.013 -0.035	20~800			3 4 5 6		7	8		
	10					4 5 6 8		8			
	12					5 6 8 10		10			
	13		20~1000			5 6 8 10 12		11			0.5
	15	-0.016 -0.043				5 6 8 10 12		13	0.3		
	16					5 6 8 10 12		14	10		
	18		20~1200	E=2·P×5 F=2·Q×5		5 6 8 10 12 16		16			
	20					6 8 10 12 16		17			
	25	-0.020 -0.053				8 10 12 16 20 24		22			
	30					8 10 12 16 20 24		27			
	35		20~1500			10 12 16 20 24 30		30	15		1.0
	40	-0.025 -0.064				12 16 20 24 30		36		0.5	
	50					16 20 24 30		41	20		



代码	技术说明
LC	<p>变更L尺寸公差</p> <p>选型方法 LC</p> <p>最小单位0.1</p> <p>L < 300 变更为L±0.03;</p> <p>300 ≤ L < 600 变更为L±0.05;</p> <p>L ≥ 600 变更为L±0.1</p>

代码	技术说明																																																																																																																																																
PC() PS() QC() QS()	<p>变更外螺纹为细牙螺纹</p> <p>选型方法 PC17</p> <p>PC-QC: 此细牙螺纹螺距与轴承螺帽的相对应</p> <p>PS-QS: 此细牙螺纹螺距与气缸的相对应</p> <table border="1"> <thead> <tr> <th>D</th> <th colspan="4">PC-QC</th> <th colspan="4">PS-QS</th> </tr> </thead> <tbody> <tr><td>6</td><td>3</td><td>4</td><td>5</td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td>3</td><td>4</td><td>5</td><td>6</td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td>4</td><td>5</td><td>6</td><td>8</td><td></td><td></td><td></td></tr> <tr><td>12</td><td></td><td></td><td>5</td><td>6</td><td>8</td><td>10</td><td></td><td>10</td></tr> <tr><td>13</td><td></td><td></td><td></td><td>5</td><td>6</td><td>8</td><td>10</td><td>12</td></tr> <tr><td>15</td><td></td><td></td><td></td><td></td><td>5</td><td>6</td><td>8</td><td>10</td></tr> <tr><td>16</td><td></td><td></td><td></td><td></td><td></td><td>5</td><td>6</td><td>8</td></tr> <tr><td>18</td><td></td><td></td><td></td><td></td><td></td><td></td><td>5</td><td>6</td></tr> <tr><td>20</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>5</td></tr> <tr><td>25</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>30</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>35</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>40</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>50</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>螺距</td><td>0.35</td><td>0.5</td><td>0.75</td><td>1.0</td><td>1.5</td><td>1.25</td><td>1.5</td><td></td></tr> </tbody> </table> <p>指定时将P尺寸变更为PC(PS) 指定时将Q尺寸变更为QC(QS) P尺寸与PC(PS)变为相同尺寸 Q尺寸与QC(QS)变为相同尺寸</p>	D	PC-QC				PS-QS				6	3	4	5						8	3	4	5	6					10		4	5	6	8				12			5	6	8	10		10	13				5	6	8	10	12	15					5	6	8	10	16						5	6	8	18							5	6	20								5	25									30									35									40									50									螺距	0.35	0.5	0.75	1.0	1.5	1.25	1.5	
D	PC-QC				PS-QS																																																																																																																																												
6	3	4	5																																																																																																																																														
8	3	4	5	6																																																																																																																																													
10		4	5	6	8																																																																																																																																												
12			5	6	8	10		10																																																																																																																																									
13				5	6	8	10	12																																																																																																																																									
15					5	6	8	10																																																																																																																																									
16						5	6	8																																																																																																																																									
18							5	6																																																																																																																																									
20								5																																																																																																																																									
25																																																																																																																																																	
30																																																																																																																																																	
35																																																																																																																																																	
40																																																																																																																																																	
50																																																																																																																																																	
螺距	0.35	0.5	0.75	1.0	1.5	1.25	1.5																																																																																																																																										



型号	D	L	E·F	A·B	P·Q	S
Y-FCK11	6	20~800	E<D×5 F<D×5	根据使用要求 指定A·B尺寸	3 4 5	根据使用要求 指定S尺寸
Y-FCK14	10				4 5	

Y-FCK11—D8—L80—E10—F10—A6—B6—P3—Q3—S10

可选加工

型号	D	L	E·F	A·B	P·Q	S	可选加工代码
Y-FCK11	6	20~800	E<D×5 F<D×5	根据使用要求 指定A·B尺寸	3 4 5	根据使用要求 指定S尺寸	PC() PS() QC() QS()
Y-FCK14	10				4 5		

Y-FCK11—D8—L80—E10—F10—A6—B6—P3—Q3—S10—LC



优惠价
数量 1~9 10~
价格 95% 另行报价

未税价(元)



导向轴