

凸轮轴承随动器

内六角孔型·圆柱型/球面型 螺栓型 标准型/经济型




代码	类型		材质		油嘴材质	
			国标	相当		
E-BPF05	经济型	内六角孔型	圆柱型	GCr15	SUJ2	铜油嘴
E-BPF15				9Cr18Mo	SUS440C	不锈钢油嘴
E-BPF06			球面型	GCr15	SUJ2	铜油嘴
E-BPF25				9Cr18Mo	SUS440C	不锈钢油嘴
E-BPF35						
E-BPF26						

□ 圆柱型D公差：


D	公差
10~16	$0_{-0.008}^0$
19~30	$0_{-0.009}^0$
32~47	$0_{-0.011}^0$
52~80	$0_{-0.013}^0$
85~90	$0_{-0.015}^0$

□ 球面型D公差： $0_{-0.05}^0$

标准型·圆柱型
BPF05/06/15

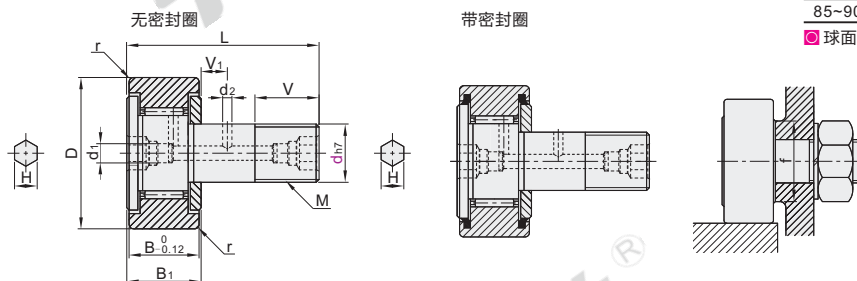

标准型·球面型
BPF25/26/35

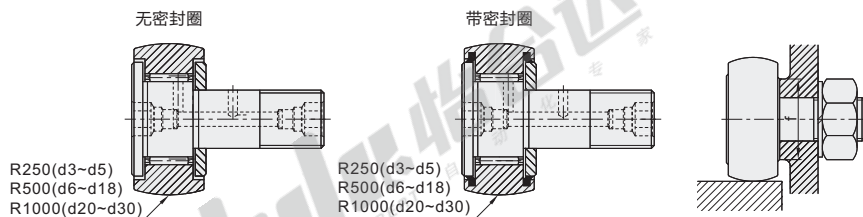

- ① 带密封型工作温度-20~80°C，连续使用建议60°C以下。
- ② 不带密封型工作温度-20~120°C，连续使用建议100°C以下。



视角标准：第一视角

型号		密封圈	D	M×螺距	B	B ₁	L	d ₁	d ₂	V	V ₁	H	r	f (min)	基本额定负载 (KN)				最大静态容许负载 (KN)		轨道表面负载容量 (KN)		最大拧紧扭矩 (N.m)	极限转速 min ⁻¹	重量 (g)		
代码	d _{h7}														Cr(动)	Co(静)	钢	不锈钢	钢	不锈钢	钢	不锈钢				圆柱型	球面型
圆柱型 E-BPF05 E-BPF06 E-BPF15	3		10	M3×0.5	7	8	17	钢 不锈钢		5	2	2	0.2	6.8	1.02	0.81	0.38	0.38	0.38	0.38	1.37	0.37	0.34	47000	4.3		
	4		12	M4×0.7	8	9	20		6	2.5	2.5		8.3	1.59	1.27	0.83	0.83	0.83	0.83	1.76	0.47	0.78	37000	7.4			
	5	$0_{-0.012}^0$	13	M5×0.8	9	10	23		7.5				9.3	2.14	1.73	1.26	1.26	1.26	1.26	2.25	0.53	1.6	29000	10.3			
	6		16	M6×1.0	11	12	28		8				11	3.65	2.92	1.95	1.95	1.95	1.95	3.43	1.08	2.7	25000	18.5			
	8		19	M8×1.25	11	12	32		10		4	4	0.3	13	4.74	3.79	4.62	3.79	4.62	4.62	4.02	1.37	6.5	20000	28.5		
	10		22	M10×1.25																							
	10C	$0_{-0.015}^0$	22	M10×1.0																							
	10A		26	M10×1.25	12	13	36	4		12																	
	10D		26	M10×1.0																							
	12A		30	M12×1.5	14	15	40		4																		
球面型 E-BPF25 E-BPF26 E-BPF35	12		32																								
	16	$0_{-0.018}^0$	35	M16×1.5	18	19.5	52		6	3																	
	18		40	M18×1.5	20	21.5	58			8	8																
	20		52																								
	20A		47	M20×1.5	24	25.5	66			21	9	10															
	24		62																								
	24A	$0_{-0.021}^0$	72	M24×1.5	29	30.5	80		8	6	4																
	30		80																								
	30A		85	M30×1.5	35	37	100																				
	30B		90																								

- ① d₃~d₈没有加工d₁/d₂润滑孔，不能补充润滑脂，d₁₀以下无d₂润滑孔；
- ② d₃~d₈一端为内六角孔，d₁₀以上两端为内六角孔，螺栓通孔。
- ③ 上表中极限转速数值适用于无密封圈、润滑脂润滑的型号。采用油润滑的型号容许使用上限为上述数值的130%；带密封圈的型号容许使用上限为上述数值的70%。

关节轴承
E7



型号	d	密封圈	D
E-BPF05	3	PP(带密封圈)	10
E-BPF06	4	(无密封圈)	12
E-BPF05	d3	PP	



● 优惠价
数量 1~9 10~
价格 100% 另行报价

● 交货期
5

