




经济型 直齿行星减速机



单段/双段
方法兰

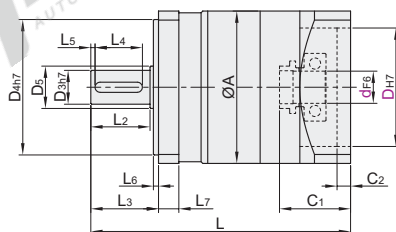

输入端带键槽示意图



输出端



视角标准：第一视角

型号		段数	减速比	背隙	轴径 d	定位凸台 D	安装孔中心距 C	安装孔 M	输入端键槽尺寸		适配电机								
代码	法兰尺寸								J	H									
ZJU91	60	1	3 4 5 7 10	P2 (标准背隙)	8	38.1	66.67	M4	—	—	400W伺服/57步进								
					14	50	70	M4 M5	5	16.3									
					14J5	73	98.5	M5	—	—									
					19	70	90	M5 M6	6	21.8									
	90				2	16 20 25 28 35 40 50 70	P2 (标准背隙)	19	95	115	M6	—	—	750W伺服/86步进					
								19J6	—	—	—	6	21.8						
								22	—	—	—	—	—						
								22J6	—	—	—	6	24.8						
	120							3	22J8	110	145	M8	8	25.3	低惯量1/1.5KW伺服				
													24	—		—	—	—	—
													24J8	—		—	—	8	27.3
													8	38.1		66.67	M4	—	—
	14	50	70	M4 M5									5	16.3					
	14J5	73	98.5	M5									—	—					
	19	70	90	M5 M6									6	21.8					
	90	4	22J8	110									145	M8	19	—	750W伺服/86步进		
					19J6	—	—								—	6		21.8	
					22	—	—								—	—		—	
					22J6	—	—								—	6		24.8	
	120				5	24	24J8								110	145	M8	8	25.3
								24	—	—	—	—						—	
								24J8	—	—	—	8						27.3	
								8	38.1	66.67	M4	—						—	400W伺服/57步进
	14							50	70	M4 M5	5	16.3							
14J5	73							98.5	M5	—	—								
19	70							90	M5 M6	6	21.8								
90	6							22J8	110	145	M8	19						—	750W伺服/86步进
		19J6	—	—								—	6	21.8					
		22	—	—								—	—	—					
		22J6	—	—								—	6	24.8					
120		7	24	24J8								110	145	M8				8	25.3
					24	—	—								—	—	—		
					24J8	—	—								—	8	27.3		
					8	38.1	66.67								M4	—	—	400W伺服/57步进	
14					50	70	M4 M5								5	16.3			
14J5					73	98.5	M5								—	—			
19					70	90	M5 M6								6	21.8			
90					8	22J8	110								145	M8	19	—	750W伺服/86步进
	19J6							—	—	—	6						21.8		
	22							—	—	—	—						—		
	22J6							—	—	—	6						24.8		
120	9							24	24J8	110	145						M8	8	25.3
		24	—	—								—	—	—					
		24J8	—	—								—	8	27.3					
		8	38.1	66.67								M4	—	—				400W伺服/57步进	
14		50	70	M4 M5								5	16.3						
14J5		73	98.5	M5								—	—						
19		70	90	M5 M6								6	21.8						
90		10	22J8	110								145	M8	19				—	750W伺服/86步进
					19J6	—	—							—	6	21.8			
					22	—	—							—	—	—			
					22J6	—	—							—	6	24.8			
120					11	24	24J8							110	145	M8		8	25.3
	24							—	—	—	—						—		
	24J8							—	—	—	8						27.3		
	8							38.1	66.67	M4	—						—	400W伺服/57步进	
14	50							70	M4 M5	5	16.3								
14J5	73							98.5	M5	—	—								
19	70							90	M5 M6	6	21.8								
90	12							22J8	110	145	M8						19	—	750W伺服/86步进
		19J6	—	—								—	6				21.8		
		22	—	—								—	—				—		
		22J6	—	—								—	6				24.8		
120		13	24	24J8								110	145				M8	8	25.3
					24	—	—							—	—	—			
					24J8	—	—							—	8	27.3			
					8	38.1	66.67							M4	—	—		400W伺服/57步进	
14					50	70	M4 M5							5	16.3				
14J5					73	98.5	M5							—	—				
19					70	90	M5 M6							6	21.8				
90					14	22J8	110							145	M8	19		—	750W伺服/86步进
	19J6							—	—	—	6					21.8			
	22							—	—	—	—					—			
	22J6							—	—	—	6					24.8			
120	15							24	24J8	110	145					M8		8	25.3
		24	—	—								—	—				—		
		24J8	—	—								—	8				27.3		
		8	38.1	66.67								M4	—				—	400W伺服/57步进	
14		50	70	M4 M5								5	16.3						
14J5		73	98.5	M5								—	—						
19		70	90	M5 M6								6	21.8						
90		16	22J8	110								145	M8				19	—	750W伺服/86步进
					19J6	—	—							—	6		21.8		
					22	—	—							—	—		—		
					22J6	—	—							—	6		24.8		
120					17	24	24J8							110	145		M8	8	25.3
	24							—	—	—	—					—			
	24J8							—	—	—	8					27.3			
	8							38.1	66.67	M4	—					—		400W伺服/57步进	
14	50							70	M4 M5	5	16.3								
14J5	73							98.5	M5	—	—								
19	70							90	M5 M6	6	21.8								
90	18							22J8	110	145	M8					19		—	750W伺服/86步进
		19J6	—	—								—	6			21.8			
		22	—	—								—	—			—			
		22J6	—	—								—	6			24.8			
120		19	24	24J8								110	145			M8		8	25.3
					24	—	—							—	—		—		
					24J8	—	—							—	8		27.3		
					8	38.1	66.67							M4	—		—	400W伺服/57步进	
14					50	70	M4 M5							5	16.3				
14J5					73	98.5	M5							—	—				
19					70	90	M5 M6							6	21.8				
90					20	22J8	110							145	M8		19	—	750W伺服/86步进
	19J6							—	—	—	6						21.8		
	22							—	—	—	—						—		
	22J6							—	—	—	6						24.8		
120	21							24	24J8	110	145						M8	8	25.3
		24	—	—								—	—			—			
		24J8	—	—								—	8			27.3			
		8	38.1	66.67								M4	—			—		400W伺服/57步进	
14		50	70	M4 M5								5	16.3						
14J5		73	98.5	M5								—	—						
19		70	90	M5 M6								6	21.8						
90		22	22J8	110								145	M8			19		—	750W伺服/86步进
					19J6	—	—							—	6	21.8			
					22	—	—							—	—	—			
					22J6	—	—							—	6	24.8			
120					23	24	24J8							110	145	M8		8	25.3
	24							—	—	—	—						—		
	24J8							—	—	—	8						27.3		
	8							38.1	66.67	M4	—						—	400W伺服/57步进	
14	50							70	M4 M5	5	16.3								
14J5	73							98.5	M5	—	—								
19	70							90	M5 M6	6	21.8								
90	24							22J8	110	145	M8						19	—	750W伺服/86步进
		19J6	—	—								—	6				21.8		
		22	—	—								—	—				—		
		22J6	—	—								—	6				24.8		
120		25	24	24J8								110	145				M8	8	25.3
					24	—	—							—	—	—			
					24J8	—	—							—	8	27.3			
					8	38.1	66.67							M4	—	—		400W伺服/57步进	
14					50	70	M4 M5							5	16.3				
14J5					73	98.5	M5							—	—				
19					70	90	M5 M6							6	21.8				
90					26	22J8	110							145	M8	19		—	750W伺服/86步进
	19J6							—	—	—	6					21.8			
	22							—	—	—	—					—			
	22J6							—	—	—	6					24.8			
120	27							24	24J8	110	145					M8		8	25.3
		24	—	—								—	—				—		
		24J8	—	—								—	8				27.3		
		8	38.1	66.67								M4	—				—	400W伺服/57步进	
14		50	70	M4 M5								5	16.3						
14J5		73	98.5	M5								—	—						
19		70	90	M5 M6								6	21.8						
90		28	22J8	110								145	M8				19	—	750W伺服/86步进
					19J6	—	—							—	6		21.8		
					22	—	—							—	—		—		
					22J6	—	—							—	6		24.8		
120					29	24	24J8							110	145		M8	8	25.3
	24							—	—	—	—					—			
	24J8							—	—	—	8					27.3			
	8							38.1	66.67	M4	—					—		400W伺服/57步进	
14	50							70	M4 M5	5	16.3								
14J5	73							98.5	M5	—	—								
19	70							90	M5 M6	6	21.8								
90	30							22J8	110	145	M8					19		—	750W伺服/86步进
		19J6	—	—								—	6			21.8			
		22	—	—								—	—			—			
		22J6	—	—								—	6			24.8			
120		31	24	24J8								110	145			M8		8	25.3
					24	—	—							—	—		—		
					24J8	—	—							—	8		27.3		
					8	38.1	66.67							M4	—		—	400W伺服/57步进	
14					50	70	M4 M5							5	16.3				
14J5					73	98.5	M5							—	—				
19					70	90	M5 M6							6	21.8				
90					32	22J8	110							145	M8		19	—	750W伺服/86步进
	19J6							—	—	—	6						21.8		
	22							—	—	—	—						—		
	22J6							—	—	—	6						24.8		
120	33							24	24J8	110	145						M8	8	25.3
		24	—	—								—	—			—			
		24J8	—	—								—	8			27.3			
		8	38.1	66.67								M4	—			—		400W伺服/57步进	
14		50	70	M4 M5								5	16.3						
14J5		73	98.5	M5								—	—						
19		70	90	M5 M6								6	21.8						
90		34	22J8	110								145	M8			19		—	750W伺服/86步进
					19J6	—	—							—	6	21.8			
					22	—	—							—	—	—			
					22J6	—	—							—	6	24.8			
120					35	24	24J8							110	145	M8		8	25.3
	24							—	—	—	—						—		
	24J8							—	—	—	8						27.3		
	8							38.1	66.67	M4	—						—	400W伺服/57步进	
14	50							70	M4 M5	5	16.3								
14J5	73							98.5	M5	—	—								
19	70							90	M5 M6	6	21.8								
90	36							22J8	110	145	M8						19	—	750W伺服/86步进
		19J6	—	—								—	6				21.8		
		22	—	—								—	—				—		
		22J6	—	—								—	6				24.8		
120		37	24	24J8								110	145				M8	8	25.3
					24	—	—							—	—	—			
					24J8	—	—							—	8	27.3			
					8	38.1	66.67							M4	—	—		400W伺服/57步进	
14					50	70	M4 M5							5	16.3				
14J5					73	98.5	M5							—	—				
19					70	90	M5 M6							6	21.8				
90					38	22J8	110							145	M8	19		—	750W伺服/86步进
	19J6							—	—	—	6					21.8			
	22							—	—	—	—					—			
	22J6							—	—	—	6					24.8			
120	39							24	24J8										

尺寸表

法兰尺寸	段数	C1	C2	C3	D1	D2	D3	D4	D5	D6	D7	J1	L	L1	L2	L3	L4	L5	L6	L7	L8	L9	A
60	1	31.5	5	60	70	5.5	14	50	17	M5	16	5	119	60	31	35	25	—	—	8	—	8	60
	2	—	—	—	—	—	—	—	—	—	—	—	135	—	—	—	—	3	3	—	—	—	—
90	1	42	8	90	100	7	20	80	25	M6	22.5	6	153.5	90	35	40	30	—	—	12	12	12	90
	2	—	—	—	—	—	—	—	—	—	—	—	177	—	—	—	—	—	—	—	—	—	—
120	1	60	8	120	130	9	25	110	35	M10	28	8	211	120	49	55	40	5	4	15	25	16	120
	2	—	—	—	—	—	—	—	—	—	—	—	241	—	—	—	—	—	—	—	—	—	—



请按图示订货

型号		段数	减速比	背隙	轴径	定位凸台	安装孔中心距	安装孔
代码	法兰尺寸				d	D	C	M
ZJU91	60	1	3 4 5 7 10	P2 (标准背隙)	8 14	38 50	66.67 76	M4 M5

JZU91—60—1—10—P2—d8—D38.1—C66.67—M4



未税价(元)

优惠价	数量	1~10	11~
价格	100%	另行报价	—



交货期	7
-----	---

经济型 直齿行星减速机

单段/双段
方法兰

减速机性能表

规格	单位	段数	减速比	法兰尺寸		
				60	90	120
额定输出扭矩T _N	Nm	1	3	16.5	60	148
			4	27	86	222
			5	27	94.5	235
			7	19.5	64	158
		2	10	8.5	39.5	93
			16	30	96	250
			20	30	96	250
			25	33	105.5	264
			28	30	96	250
			35	33	105.5	264
			40	30	96	250
			50	33	105.5	264
			70	21.5	71.5	177
最大输出力矩T _{2N}	Nm	1、2		2倍额定输出扭矩		
额定输入转速n _{1N}	rpm	1、2		3000	3000	2000
最大输入转速n _{1max}	rpm	1、2	3~70	6000	6000	3500
最大容许径向力F _{2rb}	N	1、2		170	1020	2230
最大容许轴向力F _{2ab}	N	1、2		120	850	1550
效率	%	1、2	3~70	97		95
平均寿命	h	1、2	3~70	20000		
背隙	arcmin	1	3~10	15		
		2	16~70	20		
重量	kg	1	3~10	1.4	4.7	6.9
		2	16~70	1.6	5.3	8.9
噪音	dB	1、2		60	65	68
润滑	—	1、2	3~70	合成油脂润滑		
防护等级	—	1、2		IP65		