


精密型 转角行星减速机


◀ 螺旋伞齿·双段
方法兰 标准背隙

代码	类型
ZJU20	螺旋伞齿 双段

法兰尺寸: 60




A向视图

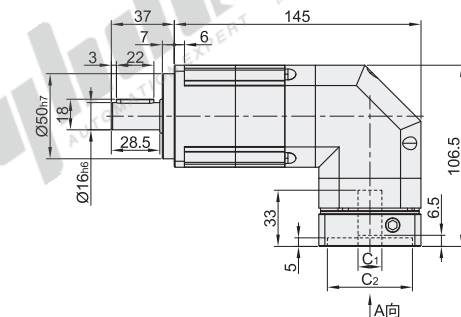


A向




输出端




法兰尺寸: 90



A向视图

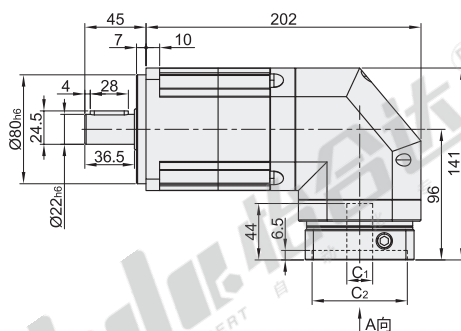


A向




输出端


法兰尺寸: 115

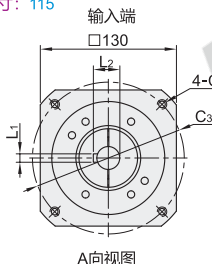

A向视图

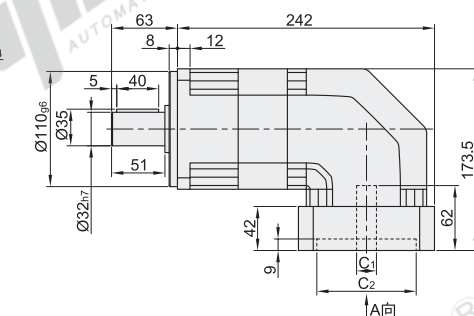

A向



输出端

视角标准: 第一视角

型号		段数	减速比	背隙	安装尺寸 代号	电机连接板尺寸/安装尺寸									
代码	法兰尺寸					C ₁	C ₂	C ₃	C ₄	L ₁	L ₂				
ZJU20	60	2 (双段)	15 20 25 30 35 40 50 70 100	P2 (标准背隙)	T1	14	50	70	M4	—	—				
					T2	11									
					T3	8	38.1	66.7							
									T4	14	50	70	M5		
								T1		73	98.4				
								T2	19	70	90				
	90							T3				M6			
									T1	22					
									T2	24	110				145
					115				T3				M8	8	27.3
									T4	19	95	115			
										6	21.8				

性能参数表

规格	减速比	法兰尺寸		
额定输出扭矩(Nm)	15	60	90	115
	15	53	145	290
	20	55	150	300
	25	54	140	
	30	53	145	290
	35	54	140	
	40	55	150	300
	50			
	70	54	140	290
	100			
最大输出扭矩(Nm)	15~100	3倍额定输出		
传递效率(%)	15~100	≥92		
平均使用寿命(h)	15~100	20000		
工作温度(°C)	15~100	-10~+90		
防护等级	15~100	IP65		
安装方向	15~100	任意方向		
标准背隙P2(arcmin)	15~100	10~12		
额定输入转速(rpm)	15~100	3000		
最大输入转速(rpm)	15~100	6000		
最大容许径向力(N)	15~100	1010	1780	3420
最大容许轴向力(N)	15~100	600	1500	2650
噪音值(dB)	15~100	≤62		



请按图示订货

型号	段数	减速比	背隙	安装尺寸 代号
代码	法兰尺寸			
ZJU20	60	2	15-20	T1
	90		P2	T2

ZJU20-60-2-15-P2-T1