

高负载型氮气弹簧

◀ 微型



代码	类型	材质		表面处理		使用气体	使用温度
		气缸筒	活塞杆	气缸筒	活塞杆		
FHK01	微型	40Cr	38Cr	发黑	抛光+渗氮	N ₂	0°C~80°C





- 行程 ≥ 80 时, 气缸筒材质为 S20C。
- 活塞杆最大使用速率: 1.6m/s。
- 使用时, 请选择专用的法兰固定。

规格: 45/75

规格: 60

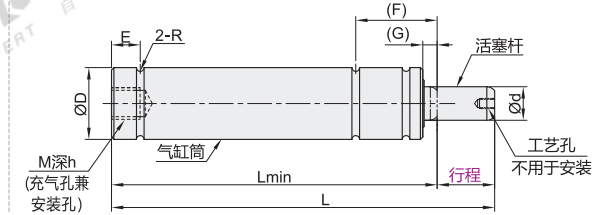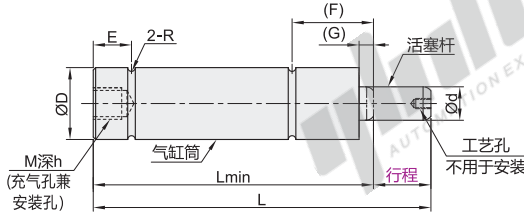

规格: 170

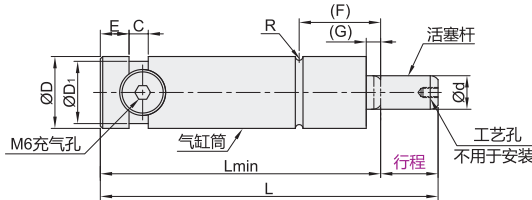

视角标准: 第一视角

型号	行程	在+20°C时的弹簧力(N)		L	压缩后长度 Lmin	D	D ₁	d	C	E	H	R	(F)	(G)	M深h
		初始力	终端力												
FHK01	45	7	597	56	49	12	-	6	-	5	-	0.8	17	3	M6深6
		10	634	62	52										
		12.7	657	67.4	54.7										
		15	670	72	57										
		19	689	80	61										
		25	707	92	67										
		38.1	730	118.2	80.1										
		50	742	142	92										
		63.5	789	172	108.5										
		75	788	195	120										
		80	827	205	125										
		100	817	245	145										
	125	810	295	170											
	60	7	865	56	49	15	-	7	-	6	-	0.8	17	3	M6深6
		10	895	62	52										
		12.7	914	67.4	54.7										
		15	927	72	57										
		19	943	80	61										
		25	961	92	67										
		38.1	1032	118.2	80.1										
		50	1033	142	92										
		63.5	1092	172	109										
		75	1082	195	120										
		80	1079	205	125										
		100	1069	245	145										
	125	1062	295	170											
	75	7	1600	56	49	19	-	8	-	6	-	1	17	1	M6深6
		10	1400	62	52										
		12	1330	66	54										
		15	1300	72	57										
		19	1300	80	61										
		25	1300	92	67										
		38.1	118.2	80.1											
		50	142	92											
		63.5	172	108.5											
		80	205	125											
100		245	145												
125		295	170												
170	10	3060	70	60	32	28	12	3.5	4	18	1	12.5	1	M6深6	
	12.7	3070	75.4	62.7											
	16	82	66												
	25	3080	100	75											
	38.1	126.2	88.1												
	50	3090	150	100											
	63.5	3020	177	113.5											
	80	3040	210	130											
	100	3050	250	150											
	125	3060	300	175											

弹簧
氮气
弹簧

C4



型号		行程
代码	规格	
FHK01	45	7
	10	10

FHK01—45—10



● 优惠价

数量	1~29	30~
价格	100%	另行报价



交货期

7

□ 初始力公差: ±7%。