



代码	类型	适用电机品牌
ZIA78	动力线	三菱J3/J4专用
ZIA79	刹车线	




外形图A




外形图B

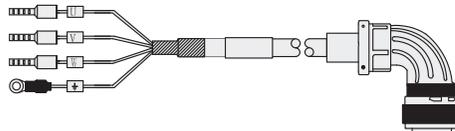

外形图C



外形图D



动力线

代码	电缆类型	长度 (m)	规格	外形图	适用机种	适用马达	适用放大器	驱动器	电机端	线材规格	
										固定型	运动型
ZIA78	F 固定型 (黑色)	2	01	A	负载同侧引出 100W-750W	HG-KR□ HG-MR□ HF-MP□ HF-KP□	MR-J4-□ MR-J3-□	E型端子	JN4FT04SJ1	0.5mm²×4C	0.5mm²×4C
			02		反负载侧引出 100W-750W	HG-KR□ HG-MR□ HF-MP□ HF-KP□					
			03	B	直接连接	HF-SP51,52 HG-SR51,52					
	04	HF-SP81,152 HG-SR81,152									
	05	HF-SP121,201,202 HG-SR121,201,202	军规22-22S		2mm²×4C	2.5mm²×4C					
	06	HF-SP301,302,352,502 HG-SR301,352,502		3.3mm²×4C			4mm²×4C				
ZIA79	M 运动型 (橙色)	10	01	C	负载同侧引出 100W-750W	HG-KR□ HG-MR□ HF-MP□ HF-KP□	MR-J4-□ MR-J3-□	E型端子	JN4FT02SJ1	0.3mm²×2C	0.5mm²×2C
			02		反负载侧引出 100W-750W	HG-KR□ HG-MR□ HF-MP□ HF-KP□					
			03	D	直接连接	HF-SP51,52 HF-SP81,152 HF-SP121,201,202 HF-SP301,302,352,502					

刹车线

代码	电缆类型	长度 (m)	规格	外形图	适用机种	适用马达	适用放大器	驱动器	电机端	线材规格	
										固定型	运动型
ZIA79	M 运动型 (橙色)	10	01	C	负载同侧引出 100W-750W	HG-KR□ HG-MR□ HF-MP□ HF-KP□	MR-J4-□ MR-J3-□	E型端子	JN4FT02SJ1	0.3mm²×2C	0.5mm²×2C
			02		反负载侧引出 100W-750W	HG-KR□ HG-MR□ HF-MP□ HF-KP□					
			03	D	直接连接	HF-SP51,52 HF-SP81,152 HF-SP121,201,202 HF-SP301,302,352,502					



型号		长度	规格
代码	电缆类型		
ZIA78	F	2 3 5 10	01 02 03...
ZIA79	M		

ZIA78 — F — 5 — 02

