

# 圆弧齿同步带


## S2M/S3M/S5M/S8M型 标准型

同步带


F2

代码	类型	齿距	材质		颜色	使用温度
			主体	芯线		
ECE21	S2M	2.0	橡胶	玻璃 纤维线	黑色	-20~80°C
	S3M	3.0				
	S5M	5.0				
	S8M	8.0				

皮带宽度公差	
皮带宽度(mm)	公差
3~30	±0.5
31~50	±0.8
51~100	±1.0

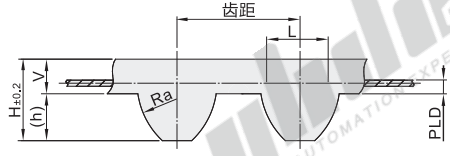

代码	齿形	齿距	L	h	H	V	R <sub>a</sub>	PLD
ECE21	S2M	2	1.3	0.76	1.31	0.55	1.3	0.254
	S3M	3	1.95	1.14	2.1	0.96	1.95	0.381
	S5M	5	3.25	1.91	3.61	1.7	3.25	0.480
	S8M	8	5.2	3.05	5	1.95	5.2	0.686



☑ ECE21-S2M(齿距: 2)

☑ ECE21-S2M(齿距: 2)

☑ ECE21-S2M(齿距: 2)

☑ ECE21-S3M(齿距: 3)

☑ ECE21-S3M(齿距: 3)

ECE21-S2M(齿距: 2)			ECE21-S2M(齿距: 2)			ECE21-S2M(齿距: 2)			ECE21-S3M(齿距: 3)			ECE21-S3M(齿距: 3)		
型号	皮带公差	齿数	型号	皮带公差	齿数	型号	皮带公差	齿数	型号	皮带公差	齿数	型号	皮带公差	齿数
40	40	86	40	40	264	40	40	594	60	60	93	60	60	492
		88			268			596			99			498
		90			270			600			103			504
		92			272			604			120			513
		94			274			606			123			522
		98			276			620			129			525
		100			278			630			132			534
		102			280			632			141			540
		104			282			650			144			549
		106			284			652			147			552
		108			286			654			150			573
		110			288			656			156			579
		112			292			660			159			597
		114			294			668			162			621
		116			296			676			168			636
		118			300			692			171			648
		120			304			700			174			657
		122			306			710			177			690
		124			308			726			180			696
		126			310			742			183			720
		128			312			752			186			726
		130			314			766			189			735
		132			316			796			192			741
		134			318			800			195			768
		136			320			810			198			771
		138			322			826			201			789
		140			324			828			204			789
		142			326			848			207			804
		144			328			856			210			810
		146			330			864			213			825
		148			332			898			219			832
		150			334			900			222			858
		152			336			940			225			882
		156			338			946			228			885
		158			340			950			234			888
		160			342			984			237			900
		162			344			1000			240			909
		164			350			1020			243			918
		166			354			1024			246			927
		168			360			1032			249			936
		170			364			1036			252			951
		172			370			1042			255			954
		174			372			1064			258			990
		176			374			1066			261			999
		178			376			1074			267			1050
		180			380			1086			270			1119
		182			386			1094			273			1134
		184			390			1100			279			1146
		186			400			1110			282			1176
		188			406			1136			285			1188
		190			408			1154			288			1260
		192			410			1166			291			1299
		194			416			1200			294			1419
		196			420			1224			297			1474
		198			426			1228			303			1530
		200			428						306			1587
		202			434						309			
		204			436						312			
		208			438						315			
		210			440						327			
		212			446						330			
		216			452						333			
		218			454						336			
		220			456						339			
		222			460						351			
		224			468						363			
		226			474						366			
		230			480						369			
		232			486						372			
		234			490						375			
		236			494						387			
		238			500						399			
		240			506						408			
		242			520						423			
		244			524						426			
		248			530						438			
		250			532						444			
		252			540						456			
		254			550						468			
		256			558						471			
		258			560						474			
		260			572						480			
		262			580						489			

☑ ECE21-S5M(齿距: 5)

型号		皮带 周长	齿数
代码	皮带公称宽度		
		225	45
		230	46
		255	51
		260	52
		275	55
		295	59
		300	60
		320	64
		325	65
		350	70
		360	72
		375	75
		380	76
		390	78
		400	80
		410	82
		420	84
		425	85
		435	87
		440	88
		445	89
		450	90
		475	95
		490	98
		500	100
		520	104
		525	105
		550	110
		560	112
		565	113
		570	114
		575	115
		600	120
		625	125
		635	127
		645	129
		650	130
		665	133
		670	134
		675	135
		695	139
		700	140
		710	142
		725	145
		740	148
		750	150
		765	153

☑ ECE21-S5M(齿距: 5)

型号		皮带 周长	齿数
代码	皮带公称宽度		
		770	154
		775	155
		800	160
		810	162
		830	166
		850	170
		860	172
		870	174
		900	180
		920	184
		940	188
		950	190
		965	193
		975	195
		1000	200
		1025	205
		1050	210
		1125	225
		1135	227
		1145	229
		1195	239
		1225	245
		1250	250
		1260	252
		1270	254
		1295	259
		1350	270
		1420	284
		1595	319
		1715	343
		1800	360
		2000	400

☑ ECE21-S8M(齿距: 8)

型号		皮带 周长	齿数
代码	皮带公称宽度		
		352	44
		384	48
		408	51
		424	53
		440	55
		456	57
		480	60
		512	64
		520	65
		528	66
		560	70
		584	73
		600	75
		632	79
		640	80
		656	82
		672	84
		680	85
		712	89
		720	90
		728	91
		760	95
		800	100
		824	103
		840	105
		848	106
		880	110
		888	111
		896	112
		920	115
		944	118
		960	120
		976	122
		984	123
		1000	125
		1032	129
		1040	130
		1056	132
		1096	137
		1120	140
		1136	142
		1152	144
		1160	145
		1184	148
		1192	149
		1200	150
		1216	152

☑ ECE21-S8M(齿距: 8)

型号		皮带 周长	齿数
代码	皮带公称宽度		
		1224	153
		1240	155
		1248	156
		1272	159
		1280	160
		1296	162
		1304	163
		1312	164
		1344	168
		1352	169
		1384	173
		1392	174
		1400	175
		1424	178
		1440	180
		1480	185
		1520	190
		1552	194
		1600	200
		1680	210
		1728	216
		1760	220
		1776	222
		1800	225
		1808	226
		1880	235
		1952	244
		2000	250
		2120	265
		2160	270
		2240	280
		2304	288
		2400	300
		2496	312
		2560	320
		2600	325
		2800	350
		2880	360
		2944	368
		3200	400
		3600	450
		3720	465
		3904	488
		4400	550

☑ ECE21-S5M(齿距: 5)



请按图示订货

型号		
代码	皮带公称宽度	皮带周长
ECE21-S5M	100	225
	150	230

ECE21-S5M-150-225



未税价(元)

● 优惠价

数量	1~4	5~
价格	100%	另行报价



交货期

4