



# 伺服线束

## 马达电源线束 台达A2系列专用


代码	类型	适用电机品牌
ZIA51	动力线	台达A2系列专用
ZIA52	动力线附刹车	

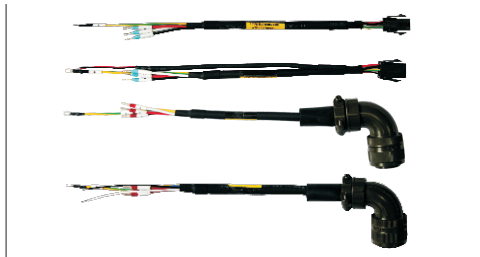


外形图A




外形图B



外形图C



外形图D

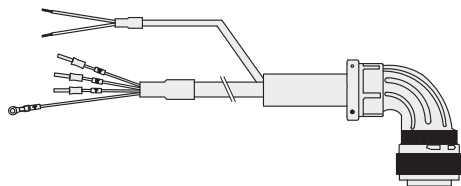

视角标准：第一视角

设备线束

型号		长度 (m)	马达 功率	外形 图	适用马达	适用 放大器	驱动器	电机端	线材规格	
代码	电缆类型								固定型	运动型
动力线 ZIA51	F 固定型 (黑色)	2 3 5 10	01 (100-1000W)	A	ECMA-C1040F□S (50W) ECMA-C-0401□S (100W) ECMA-C-0602□S (200W) ECMA-C-0604□S (400W) ECMA-C-0604□H (400W) ECMA-C-0804□7 (400W) ECMA-C-0807□S (750W) ECMA-C-0807□H (750W) ECMA-C-0907□S (750W) ECMA-C-0910□S (1000W)			4201-2×2P	0.75mm²×4C	0.75mm²×4C
动力线 附刹车 ZIA52				B	ECMA-C1040F□S (50W) ECMA-C-0401□S (100W) ECMA-C-0602□S (200W) ECMA-C-0604□S (400W) ECMA-C-0604□H (400W) ECMA-C-0804□7 (400W) ECMA-C-0807□S (750W) ECMA-C-0807□H (750W) ECMA-C-0907□S (750W) ECMA-C-0910□S (1000W)			4201-2×3P	0.75mm²×4C+0.3mm²×2C	0.75mm²×4C+0.3mm²×2C
动力线 ZIA51	M 运动型 (橙色)	2 3 5 10	02 (300-3000W)	C	ECMA-G-1303□S(300W) ECMA-E-1305□S(500W) ECMA-G-1306□S(600W) ECMA-F-1308□S(850W) ECMA-G-1309□S(900W) ECMA-C-1010□S(1000W) ECMA-E-1310□S(1000W) ECMA-E-1315□S(1500W) ECMA-C-1020□S(2000W) ECMA-E-1320□S(2000W) ECMA-C-1330□4(3000W) ECMA-F-1305□S(500W) ECMA-F-1313□S(1300W) ECMA-F-1318□S(1800W)	ASDA-A2	E型端子		1.3mm²×4C	1.5mm²×4C
动力线 附刹车 ZIA52	D			ECMA-G-1303□S(300W) ECMA-E-1305□S(500W) ECMA-G-1306□S(600W) ECMA-F-1308□S(850W) ECMA-G-1309□S(900W) ECMA-C-1010□S(1000W) ECMA-E-1310□S(1000W) ECMA-E-1315□S(1500W) ECMA-C-1020□S(2000W) ECMA-E-1320□S(2000W) ECMA-C-1330□4(3000W) ECMA-F-1305□S(500W) ECMA-F-1313□S(1300W) ECMA-F-1318□S(1800W)			军规20-18S	1.3mm²×4C+0.3mm²×2C	1.5mm²×4C+0.3mm²×2C	



请按图示订货

型号		长度	马达功率
代码	电缆类型		
ZIA51	F	2 3 5 10	01
	M		

ZIA51 — F — 5 — 01

