

- 两级滤波, 性能更佳
- 导轨安装可选 (最大30A)
- 低漏电流可选 (最大30A)
- 符合UL、CSA和EN安全认证

RSHN 系列

3A-300A, 250VAC EMI滤波器



医疗



FA



测试




通讯


主要市场领域和应用

规格明细						
型号		RSHN-2003 RSHN-2003D RSHN-2003L	RSHN-2006 RSHN-2006D RSHN-2006L	RSHN-2010 RSHN-2010D RSHN-2010L	RSHN-2016 RSHN-2016D RSHN-2016L	RSHN-2020 RSHN-2020D RSHN-2020L
额定电压 (AC、DC)	V	250V				
额定电流	A	3A	6A	10A	16A	20A
直流阻抗 (合计)	mΩ	350	140	60	35	22
型号		RSHN-2030 RSHN-2030D RSHN-2030L	RSHN-2040	RSHN-2050	RSHN-2060	RSHN-2080
额定电压 (AC、DC)	V	250V				
额定电流	A	30A	40A	50A	60A	80A
直流阻抗 (合计)	mΩ	12	10	8	6	7
型号		RSHN-2100	RSHN-2150	RSHN-2200	RSHN-2250	RSHN-2300
额定电压 (AC、DC)	V	250V				
额定电流	A	100A	150A	200A	250A	300A
直流阻抗 (合计)	mΩ	6	4	3	2	1.5
耐电压	V	端子-外壳: 2500VAC (1分钟)				
绝缘阻抗	MΩ	最小100MΩ (500VDC, 1分钟)				
漏电流 (最大)	A	RSHN-20xx 1mA; RSHN20xxL 100uA (250VAC, 60Hz)				
工作温度	°C	-25°C ~ +85°C (50 / 55°C以上输出有降额, 参见降额曲线)				
保存温度	°C	-25°C ~ +85°C				
安全认证	-	最大30A 型号-UL1283, CSA C22.2 第8, EN60939				
重量	g	190g - 13000g, 根据不同型号而定 (参见网站上的重量图)				
质量保证期	yr	1年				

输出降额曲线

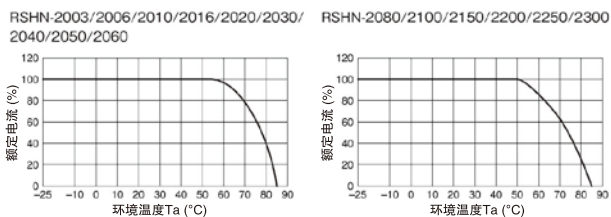

电路图

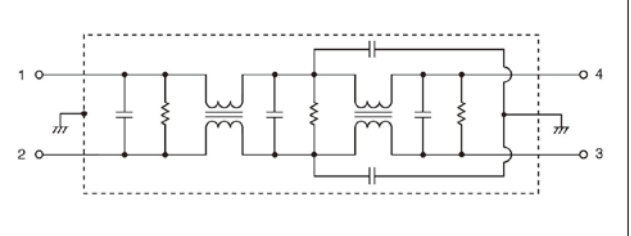

滤波器


选项

底板安装和标准漏电流	RSHN-20xx
导轨安装和标准漏电流	RSHN-20xxD
底板安装和低漏电流	RSHN-20xxL




外形图

RSHN-2003/2006/2010/2016/2020/2030

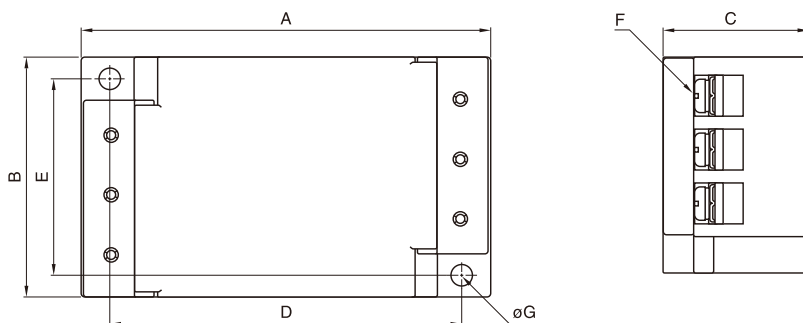

RSHN-2040/2050/2060/2080/2100/2150/2200/2250/2300

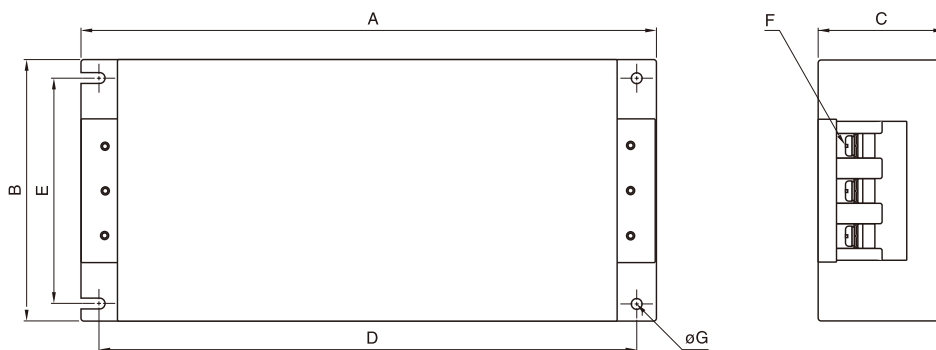

尺寸单位: mm

产品型号	A	B	C	D	E	F	G	推荐锁紧扭矩
RSHN-2003	98	52	35	86	43	M4	4.5	1.27N · m
RSHN-2006								
RSHN-2010								
RSHN-2016	127	52	35	115	43	M4		
RSHN-2020								
RSHN-2030								
RSHN-2040	272	100	60	254	82	M5	5.5	2.5N · m
RSHN-2050								
RSHN-2060								
RSHN-2080	430	161	85	410	135	M8	6.5	7.64N · m
RSHN-2100								
RSHN-2150	473	190	88	453	164	M8		
RSHN-2200	593	195	103	573	169	M10		
RSHN-2250								
RSHN-2300								