



代码	类型	适用电机品牌
ZIA65	动力线	台达B2系列专用
ZIA66	动力线附刹车	
ZIA67	编码器	




外形图A




外形图B

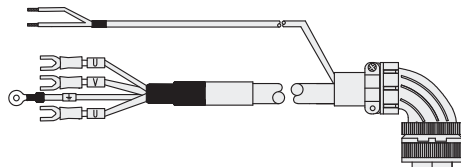

外形图C



外形图D

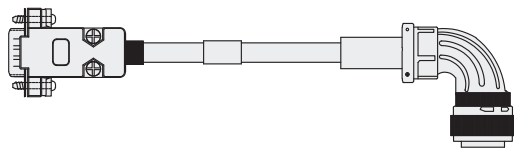

视角标准：第一视角

型号		长度 (m)	马达 功率	外形 图	适用马达	适用 放大器	驱动器	电机端	线材规格	
代码	电缆类型								固定型	运动型
动力线 ZIA65	F 固定型 (黑色)	03 (2000-3000W)	03	A	ECMA-E△1820□S(2000W) ECMA-E△1830□S(3000W) ECMA-F△1830□S(3000W)		U型端子	军规24-11S	2.0mm²×4C	2.5mm²×4C
	M 运动型 (橙色)								B	ECMA-E△1820□S(2000W) ECMA-E△1830□S(3000W) ECMA-F△1830□S(3000W)
编码器 ZIA67	F 固定型 (黑色)	2 3 5 10	01 (100-1000W)	C	ECMA-C△0401□S(100W) ECMA-C△0602□S(200W) ECMA-C△0604□S(400W) ECMA-C△0604□H(400W) ECMA-C△0804□7(400W) ECMA-C△0807□S(750W) ECMA-C△0807□H(750W) ECMA-C△0907□S(750W) ECMA-C△0910□S(1000W)	ASDA-B2		172161	2~5米AWG24 (0.2mm²) ×2P	2~5米AWG24 (0.2mm²) ×2P
	M 运动型 (绿色)								D	ECMA-G△1303□S(300W) ECMA-E△1305□S(500W) ECMA-G△1306□S(600W) ECMA-G△1309□S(900W) ECMA-C△1010□S(1000W) ECMA-E△1310□S(1000W) ECMA-E△1315□S(1500W) ECMA-C△1020□S(2000W) ECMA-E△1320□S(2000W) ECMA-F△1308□S(850W) ECMA-C△1330□4(3000W) ECMA-F11313□S(1300W) ECMA-F11318□S(1800W) ECMA-E△1820□S(2000W) ECMA-E△1830□S(3000W) ECMA-F△1830□S(3000W)

设备线束



型号		长度	马达功率
代码	电缆类型		
ZIA65	F M	2 3 5 10	03



ZIA65 - F - 5 - 03