

加热器


内出线型

代码	类型	材质				
		护套	发热丝	引出线	线缆	绝缘粉末
ZIM92	内出线型	标准型	SUS321	Ni80Cr20	纯镍耐热线	Ni-GB
E-ZIM92						
		经济型		纯镍		MgO

注意事项

- 最高使用温度为铠装管部温度，导线最高耐温200℃，导线务必从安装孔引出；
- 请勿使加热管露出被加热物体在大气中空烧；
- 使用温度500℃以下，经济型使用温度400℃。

① 适用在运动设备上。

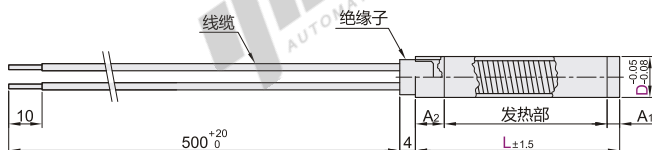

视角标准：第一视角

标准型

型号	D	L	额定功率 W _{±5%}	额定电压 V _{±5%}	冷端长度 A	发热部 长度	
ZIM92	3	15	10	24	A=A ₁ +A ₂	L-A	
		20	20				
		25	25				36
		30	30				
		40	40				
		50	50				
		100	90	48			
		200					
	300						
	4	15	10	24	D=3或4, 30<L≤60时 A ₁ =3mm, A ₂ =5mm		
		20	20				
		25	30				
		30	40	36	D=3或4, 60<L≤300时 A ₁ =5mm, A ₂ =15mm		
		40	50				
		50	70				
		60	90		48		D=4, 15≤L≤30时 A ₁ =3mm, A ₂ =3mm
		80					
	100						
	200						
	300						
	5	30	40				
		40	40				
		60	60				
		50	50				
60		100					
6	80	150					
	30	50					
	40	80					
	50	100					
	60	130					
8	80	100	220	A=A ₁ +A ₂			
	100	200					
	150	300					
	60	120					
	80	150					
10	60	100		L=30时 A ₁ =2mm, A ₂ =3mm			
	80	150					
	100	200					
	150	300					
	60	120					
12	80	150		30<L<60时 A ₁ =3mm, A ₂ =5mm			
	100	200					
	150	300					
	60	120					
	80	150					
	60	100		L=60时 A ₁ =5mm, A ₂ =5mm			
	80	150					
	100	200					
	150	300					
	60	120					
	80	150		60<L≤150时 A ₁ =7mm, A ₂ =10mm			
	100	200					
	150	300					
	60	120					
	80	150					

型号		L	额定功率	额定电压	冷端长度	发热部
代码	D		$W_{\pm 5\%}$	$V_{\pm 5\%}$	A	长度
ZIM92	16	50	200	220	$A = A_1 + A_2$	L-A
		100	500			
		150	800			
		200	1000			
		400	2500			
		600	3000			
	20	50	300		$L = 50$ 时 $A_1 = 10\text{mm}, A_2 = 15\text{mm}$	
		100	600			
		150	1000			
		200	1500			
		400	3000			
		600	4000			
	26	50	400		$50 < L \leq 600$ 时 $A_1 = 15\text{mm}, A_2 = 20\text{mm}$	
		100	800			
		150	1200			
		200	2000			
		400	4000			
		600	6000			

① 其它长度可定制。

经济型

型号	L	额定功率	额定电压	冷端长度	发热部		
代码	D	W _{±5%}	V _{±5%}	A	长度		
E-ZIM92	5	30	40	220	A=A ₁ +A ₂ L=30时 A ₁ =3mm, A ₂ =4mm 30<L<60时 A ₁ =4mm, A ₂ =5mm L=60时 A ₁ =5mm, A ₂ =5mm 60<L≤150时 A ₁ =7mm, A ₂ =10mm	L-A	
		40	40				
		6	50				60
			60				100
			80				150
			30				50
	40		80				
	50		100				
	8	60	130				
		80	100				
		100	200				
		60	100				
		80	120				
		100	150				
	10	150	300				
		150	350				
		60	120				
		80	150				
		100	200				
		150	250				
	12	300	300				
150		450					
60		100					
80		150					
100		250					
150		300					
	150	500					

① 其它长度可定制。



请按图示订货

型号 代码	D	L	额定功率 W _{±5%}	额定电压 V _{±5%}
ZIM92	8	80	150	220
ZIM92	8	100	200	220

ZIM92—D8—L80—W150—V220