


高刚性卸料板滚针导柱用挡块

◀ 固定型

代码	类型	材质	表面处理	附件
OFQ52	固定型	S45C	无电解镀镍	①螺钉 ②弹簧垫圈

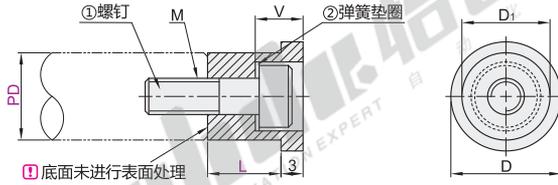

型号		L	M	V	D	D ₁
代码	PD 适用导柱直径	最小单位1				
OFQ52	16	11~20	M6	8.5	17	13.5
	20	11~25	M8	11	21	18
	25	11~30			26	23

附件螺钉规格表

PD	L				
	11~13	14~18	19~23	24~28	29~30
16	TAC01-M6-L15	TAC01-M6-L20	TAC01-M6-L25	—	—
20	TAC01-M8-L15	TAC01-M8-L20	TAC01-M8-L25	TAC01-M8-L30	—
25					TAC01-M8-L35



请按图示订货

型号		L
代码	PD(适用导柱直径)	最小单位1
OFQ52	16	11~20
	20	11~25

OFQ52 — PD16 — L12



未税价(元)

优惠价		
数量	1~9	10~
价格	100%	另行报价



交货期
9

