


滚柱式直线导轨

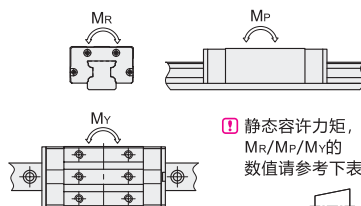

视角标准：第一视角

型号		L
代码	H	
ICD01	40	134~973
ICD03	45	176~1295

数量	1~9	10~
价格	100%	另行报价

未税价(元)



交货期
7

滑轨尺寸				基本额定负载C ₀ (kN)		静态容许力矩(KN·m)		重量					
W _R	H _R	D	h	d	P	固定螺钉 C ₀ (kN)	M _R	M _y	滑块(kg)	滑轨(kg/m)			
23	23.5	11	9	7	30	M6×20	36.3	82.9	0.95	1.08	0.85	3.5	
28	27.5	14	12	9	40	M8×25	54	124	1.72	1.96	1.22	5	
34	30.5	14	12	9	40	M8×25	73.9	169	2.85	2.94	2.15	7	
45	37	20	17	14	52.5	M12×35	117.2	261.6	5.94	5.9	4.1	11.2	
53	43	23	20	16	60	M14×45	172.5	378	10.26	10.6	7	15.6	
63	52	26	22	18	75	M16×50	277	624	20.02	22.5	22.5	13.3	22.4

H	L	N	E	H	L	N	E	H	L	N	E	H	L	N	E
最小单位1	(安装孔数)			最小单位1	(安装孔数)			最小单位1	(安装孔数)			最小单位1	(安装孔数)		
134~163	5			616~655	16			1056~1095	27			386~445	7		
164~193	6			656~695	17			1096~1135	28			446~505	8		
194~223	7			696~735	18			1136~1175	29			506~565	9		
224~253	8			736~775	19			1176~1215	30			566~625	10		
254~283	9			776~815	20			1216~1255	31			626~685	11		
284~313	10			816~855	21			1256~1295	32			686~745	12		
314~343	11			856~895	22			180~232	4			746~805	13		
344~373	12			896~935	23			233~284	5			806~865	14		
374~403	13			936~975	24			285~337	6			866~925	15		
404~433	14			976~1015	25			338~389	7			926~985	16		
434~463	15			1016~1055	26			390~442	8			986~1045	17		
464~493	16			1056~1095	27			443~494	9			1046~1105	18		
494~523	17			1096~1135	28			495~547	10			1106~1165	19		
524~553	18			1136~1175	29			548~599	11			1166~1225	20		
554~583	19			1176~1215	30			600~652	12			1226~1285	21		
584~613	20			1216~1255	31			653~704	13			1286~1345	22		
614~643	21			1256~1295	32			705~757	14			1346~1405	23		
644~673	22			176~215	5			758~809	15			1406~1465	24		
674~703	23			216~255	6			810~862	16			1466~1525	25		
704~733	24			256~295	7			863~914	17			1526~1585	26		
734~763	25			296~335	8			915~967	18			1586~1645	27		
764~793	26			336~375	9			968~1019	19			1646~1705	28		
794~823	27			376~415	10			1020~1072	20			1706~1765	29		
824~853	28			416~455	11			1073~1124	21			1766~1825	30		
854~883	29			456~495	12			1125~1177	22			1826~1885	31		
884~913	30			496~535	13			1178~1229	23			1886~1945	32		
914~943	31			536~575	14			1230~1282	24			328~402	5		
944~973	32			576~615	15			1283~1334	25			403~477	6		
176~215	5			616~655	16			1335~1387	26			478~552	7		
216~255	6			656~695	17			1388~1439	27			553~627	8		
256~295	7			696~735	18			1440~1492	28			628~702	9		
296~335	8			736~775	19			1493~1544	29			703~777	10		
336~375	9			776~815	20			1545~1597	30			778~852	11		
376~415	10			816~855	21			1598~1							

! E: 螺钉中心孔至端面距离

202

70	60	50
0	0	0
0.05	0.05	0.03

-0.05	-0.05	-0.07
0.007	0.007	0.01

尺寸精度		高级						精密级					
		40	45	55	70	80	90	40	45	55	70	80	90
单滑块	高度H的容许尺寸误差	±0.04	±0.04	±0.04	±0.05	±0.05	±0.07	±0.04	±0.04	±0.04	±0.05	±0.05	±0.07
	宽度B的容许尺寸误差	±0.04	±0.04	±0.04	±0.05	±0.05	±0.07	±0.04	±0.04	±0.04	±0.05	±0.05	±0.07
双滑块	高度H的相互误差	0.015	0.015	0.015	0.015	0.015	0.02	0.007	0.007	0.007	0.007	0.007	0.01
	宽度B的相互误差	0.015	0.015	0.015	0.02	0.02	0.025	0.007	0.007	0.007	0.01	0.01	0.015
滑块C面对滑块A面的行走平行度		请参阅行走精度表P1374											
滑块D面对滑块A面的行走平行度		请参阅行走精度表P1374											

请参阅行走精度表P1374