


拖链

代码	类型	横梁	打开方式	腔数	材质	颜色	防尘等级	静音等级	允许温度	阻燃等级	附件
VAX11	无尘静音型	桥式	内外径打开	单腔	工程塑料	黑色	ISOCLASS3	37db	-30°C~130°C	UL94-HB	接头



- 1 本系列拖链标准型号包含一套接头(移动端、固定端各一个)。
- 2 本系列拖链不包含分隔片, 分隔片需单独购买。

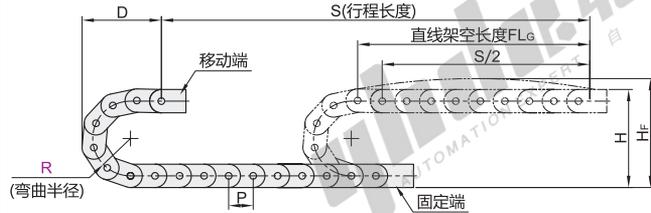


- H=理论安装高度
- HF=实际安装高度
- D=拖链退回极限位置时的最小距离
- K=π·R+安全量



内外径开口

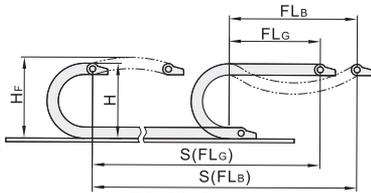

直线架空长度与负载关系图FLG

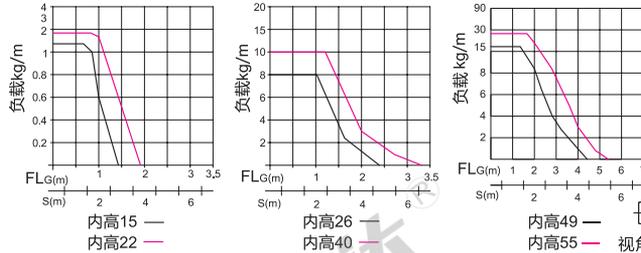

1 架空长度
FLG=直线架空长度
FLB=安全塌腰架空长度

2 每米链节数=1000÷节距P

安装尺寸

内高G	弯曲半径R	实际安装高度HF	H	D	K
15	28	109	79	59	128
	38	129	99	69	160
	48	149	119	79	192
	35	136	106	72	154
	45	156	126	82	185
	75	216	186	110	280
22	100	266	236	135	358
	120	306	276	155	421
	50	176	146	149	311
	70	216	186	135	367
	90	256	226	182	422
	120	316	286	221	533
26	150	376	346	232	589
	75	248	218	226	471
	100	298	268	251	550
	125	348	318	276	628
	150	398	368	301	706
	200	498	468	351	863
40	75	283	243	279	587
	100	333	293	304	665
	120	373	333	324	728
	140	413	373	344	791
	200	533	493	404	979
	250	633	593	454	1136
49	300	733	693	504	1293
	125	398	358	389	854
	140	428	388	404	901
	190	528	488	454	1058
	220	588	548	484	1152
	270	688	648	574	1309
55	390	928	888	654	1686

型号	规格	弯曲半径 R	链节数 N	接头	节距 P	内宽 F	外宽 E	内高 G	外高 T	最大电缆直径	最大负载 (kg/m)	最大架空长度 (m)	重量 (kg/m)		
VAX11	1520	28 38 48			20	20	34	15	22	12	1.4	0.8	0.32		
	1540					40	54							0.35	
	2216					16	30							0.43	
	2227					27	41							0.47	
	2237	35 45 75			22	37	51	22	29	18	1.8	1.1	0.51		
	2247					47	61							0.55	
	2267					67	81							0.67	
	2277					77	91							0.69	
	2635	50 70 90			28	35	55	26	38	22	7	1.1	0.9		
	2650					50	70							0.98	
	2655					55	75							1.02	
	2675					75	95							1.12	
	26100	120 150			28	100	120	26	38	22	7	1.1	1.27		
	26125					125	145							1.41	
	26150					150	170							1.59	
	26175					175	195							1.74	
	26200	200	220	1.84											
	4035	75 100 125				35	35	55	40	52	28	9.5	1.6	1.00	
	4050						50	70							1.06
	4055						55	75							1.09
4075	75						95	1.17							
40100	100						130	1.29							
40125	125						145	1.39							
40150	150						170	1.53							
40175	175						195	1.65							
40200	200						220	1.73							
4950	50						80	2.59							
4975	75						105	2.74							
49100	100						130	2.90							
49125	125	155	3.11												
49150	150	180	3.48												
49175	175	205	3.81												
49200	200	230	4.18												
49250	250	280	4.76												
49300	300	330	5.32												
5575	75	115	3.56												
55100	100	140	3.66												
55125	125	165	3.97												
55150	150	190	4.16												
55175	175	215	4.33												
55200	200	240	4.64												
55250	250	290	5.06												
55300	300	340	5.48												
55350	350	390	6.09												
55400	400	440	6.66												

- 1 在选择安装高度时, 应当参考表中实际安装高度HF值。
- 2 架空长度请参考架空长度与负载关系图, 超长或超载时请致电台洽。
- 3 如果是首次选用, 则有可能拖链长度不够, 建议多选1、2节做备用, 安装时再进行拆卸调整。
- 4 另拖链理论长度计算公式请参考拖链产品简介或登录怡合达电商平台使用选型小工具进行计算。

拖链(含接头拖链型号)

代码	规格	弯曲半径 R	链节数 N	接头
VAX11	1520	R28	N6	VDX11

请按图示订货

VAX11—1520—R28—N6—VDX11



●优惠价
数量 1~49 50~
价格 100% 另行报价




交货期
1

未标价(元)


接头

代码	类型	梳状板	材质	颜色	允许温度	阻燃等级
VDX11	无尘静音型拖链用	有	工程塑料	黑色	-30°C~130°C	UL94-HB

规格: 1520~26200

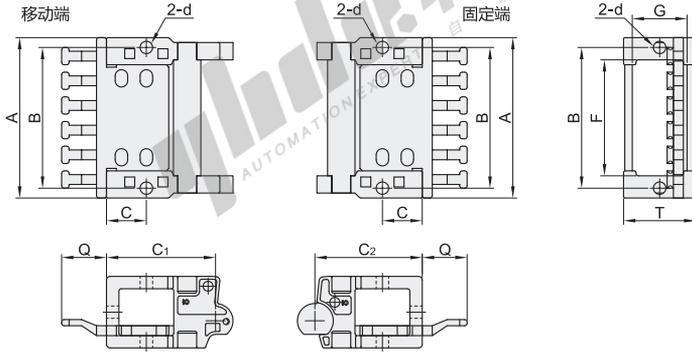

规格: 4035~55400

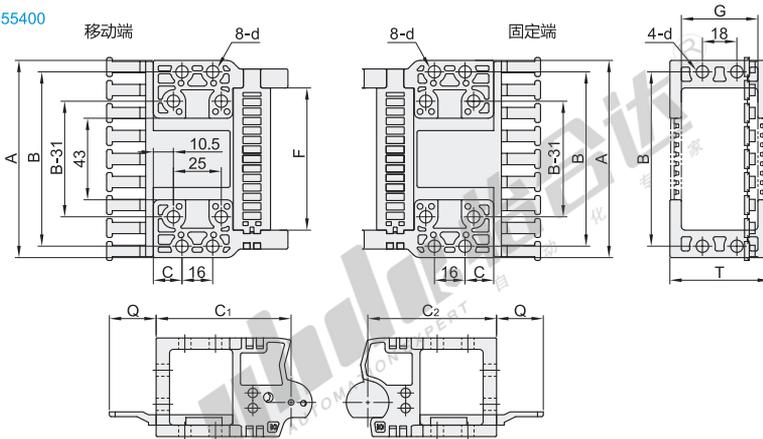

视角标准: 第一视角

型号	A	B	C	C ₁	C ₂	Q	F	G	T	d
代码	规格									
	1520	38	30	15	41	42	18	20	15	22
	1540	58	50					40		
	2216	34	26				—	16		
	2227	45	37					27		
	2237	55	47					37		5
	2247	65	57	16	43.8	43.1	18	47	22	29
	2267	85	77					67		
	2277	95	87					77		
	2635	63	49					35		
	2650	78	64					50		
	2655	83	69					55		
	2675	103	89					75		
VDX11	26100	128	114	15	56	52.2	22	100	26	38
	26125	153	139					125		5.6
	26150	178	164					150		
	26175	203	189					175		
	26200	228	214					200		
	4035	55	52					35		
	4050	70	67					50		
	4055	75	72	15	70.5	67.5	24.5	55	40	52
	4075	95	92					75	40	52
	40100	120	117					100		6.5
	40125	145	142					125		
	40150	170	167					150		
	40175	195	192	15	70.5	67.5	24.5	175	40	52
	40200	220	217					200		6.5
	4950	80	62					50		
	4975	105	87					75		
	49100	130	112					100		
	49125	155	137					125		
	49150	180	162	19	97	96		150	49	70
	49175	205	187					175		6.5
	49200	230	212					200		
	49250	280	262					250		
VDX11	49300	330	312					300		
	5575	115	90				—	75		
	55100	140	115					100		
	55125	165	140					125		
	55150	190	165					150		
	55175	215	190					175		
	55200	240	215	26	143	134		200	55	82
	55250	290	265					250		11
	55300	340	315					300		
	55350	390	365					350		
	55400	440	415					400		

接头(单买接头型号)



代码	规格
VDX11	1520
VDX11	1540

VDX11—1520



数量	1~10	11~
价格	100%	另行报价

未税价(元)




交货期
1

请按图示订货

分隔片

代码	类型	材质	颜色	允许温度	阻燃等级
VFX11	无尘静音型用分隔片	工程塑料	黑色	-30°C~130°C	UL94-HB

请根据拖链的内高G及分隔片的尺寸，选择分隔片合适的数量。



视角标准：第一视角

型号	拖链内高G	A1	B1	B2	C1	C2
VFX11	15	21.9	8.1	11	2	8
	22	28.9	11.3	14.4		
	26	33		16.6	3.2	9.6
	40	47	13	17.2		
	49	64.8		21	7	14.6
	55	76.8	18	25.4		



型号	代码	G
VFX11 — G15	VFX11	15
		22



优惠价	
数量	1~10 11~
价格	100% 另行报价

交货期
1

