

定位销

公差选择型 · 标准型/内螺纹型/外螺纹型 大头圆锥型

代码	类型	材质		硬度	表面处理
		国标	相当		
YBC01	标准型	9CrWMn	SKS3	淬火硬度58~61HRC	—
YBC02		0Cr18Ni9	SUS304	淬火硬度58~61HRC, 镀层硬度650HV~	镀硬铬+抛光, 镀层厚度3~5μm
YBC06		0Cr18Ni9	SUS304	—	抛光
YBC11		9Cr18Mo	SUS440C	—	—
YBC21		9CrWMn	SKS3	淬火硬度58~61HRC	—
YBC22	公差选择型	9CrWMn	SKS3	淬火硬度58~61HRC, 镀层硬度650HV~	镀硬铬+抛光, 镀层厚度3~5μm
YBC26		0Cr18Ni9	SUS304	—	—
YBC31		9Cr18Mo	SUS440C	—	—
YBC31	内螺纹型	9Cr18Mo	SUS440C	淬火硬度48~53HRC	抛光
YBC41		Cr12MoV	SKD11	淬火硬度48~53HRC	—
YBC42		Cr12MoV	SKD11	淬火硬度53~58HRC	—
YBC46		0Cr18Ni9	SUS304	淬火硬度53~58HRC, 镀层硬度650HV~	镀硬铬+抛光, 镀层厚度3~5μm
YBC51		9Cr18Mo	SUS440C	—	—
YBC51	外螺纹型	0Cr18Ni9	SUS304	—	—
YBC51		9Cr18Mo	SUS440C	淬火硬度48~53HRC	抛光




公差选择

D或P	普通型					精密型	
	g6	h7	m6	p6	s	a	b
2.00~3.00	-0.002 -0.008	0 -0.010	+0.008 +0.012	+0.012 +0.006	-0.01	+0.005 0	0 -0.005
3.01~6.00	-0.004 -0.012	0 -0.012	+0.012 +0.004	+0.020 +0.012			
6.01~10.00	-0.005 -0.014	0 -0.015	+0.015 +0.006	+0.024 +0.015			
10.01~18.00	-0.006 -0.017	0 -0.018	+0.018 +0.007	+0.029 +0.018			
18.01~30.00	-0.007 -0.020	0 -0.021	+0.021 +0.008	+0.035 +0.022			
30.01~32.00	-0.009 -0.025	0 -0.025	+0.025 +0.009	+0.042 +0.026			

① D=P时, 产品不带退刀槽, 并存在两种形式:
D=P但公差不同时:




D=P但公差相同时:




② SUS440C材质的D部加工有识别槽。


标准型 YBC01/02/06/11

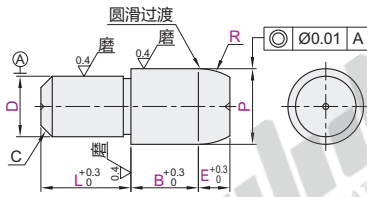


③ 抛光: 表示抛光加工部位。



内螺纹型 YBC21/22/26/31

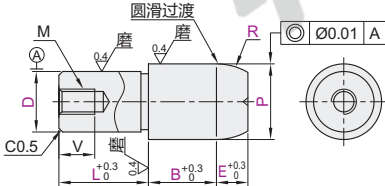

外螺纹型 YBC41/42/46/51

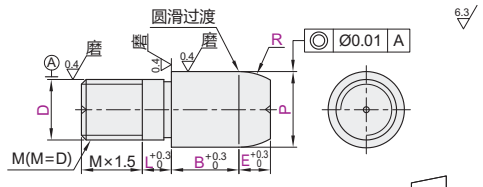

视角标准: 第一视角

标准型

代码	型号		D	P	L	B	E	R	C
	D公差	P公差							
YBC01 YBC02 YBC06 YBC11	m6	s	2	2.00~5.00	3~12	2.0~10.0	1.0~20	5	0.5
			3	3.00~7.00	4~15				
			4	4.00~8.00					
			5	5.00~9.00					
			6	6.00~11.00					
	p6	m6	8	8.00~14.00	7~17	3.0~14.0	3.0~16.0	25	1.5
			10	10.00~16.00	10~20				
			12	12.00~17.00					
			13	13.00~20.00					
			16	16.00~26.00					
20	20.00~32.00	18~35							

标准型

代码	D公差	P公差	D	P	L	B	E	R
YBC01	m6	s	2	2.00	3	2.0	1.0	5
YBC02	p6	m6	3	3.00	4	3.0	1.0	5

YBC01—p6—s—D2—P4—L4—B8—E2—R10



● 优惠价
数量 1~4 5~
价格 100% 另行报价



交货期
5



交货期
6

① 无表面处理

② 有表面处理

夹具用衬套

A6



请按照图示订货