

# AGV辅助脚轮(双轮)

## 平底活动型

容许载荷150~550kg

脚轮

| 代码    | 支架       |       |      |      | 轮部                                                                                                                               | 支架转盘 |    |    |    |    |          |    |     |    |
|-------|----------|-------|------|------|----------------------------------------------------------------------------------------------------------------------------------|------|----|----|----|----|----------|----|-----|----|
|       | 类型       | 材质    | 表面处理 | 刹车类型 |                                                                                                                                  |      |    |    |    |    |          |    |     |    |
| CFN15 | 平底活动型    | Q235A | 镀锌   | —    | <table><tr><td>代号</td><td>材质</td><td>颜色</td><td>轴承</td></tr><tr><td>AF</td><td>聚氨酯(防静电)</td><td>红色</td><td>四轴承</td></tr></table> | 代号   | 材质 | 颜色 | 轴承 | AF | 聚氨酯(防静电) | 红色 | 四轴承 | 轴承 |
| 代号    | 材质       | 颜色    | 轴承   |      |                                                                                                                                  |      |    |    |    |    |          |    |     |    |
| AF    | 聚氨酯(防静电) | 红色    | 四轴承  |      |                                                                                                                                  |      |    |    |    |    |          |    |     |    |

### 特点:

- 聚氨酯材质耐磨, 降噪, 地面不留痕迹。
- 双轮设计转弯时阻力减半, 旋转更灵活。

① 轮部代号AF为防静电聚氨酯, 工作温度25°左右, 电阻值 $10^5 \sim 10^6 \Omega$ 。

D: 65



D: 75





D: 80






D: 100/127






D: 65

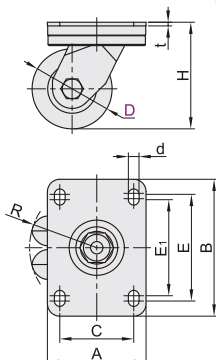




D: 75



D: 80



D: 100/127



视角标准: 第一视角

| 型号    |     | 轮部<br>代号 | H     | F    | A   | B   | C  | C <sub>1</sub> | E    | E <sub>1</sub> | d   | R    | t   | 容许载荷<br>(kg) | 参考重量<br>(kg) |  |  |
|-------|-----|----------|-------|------|-----|-----|----|----------------|------|----------------|-----|------|-----|--------------|--------------|--|--|
| 代码    | D   |          |       |      |     |     |    |                |      |                |     |      |     |              |              |  |  |
| CFN15 | 65  | AF       | 87    | 50.5 | 80  | 111 | 60 | —              | 86.5 | 78             | 8.5 | 52.5 | 3   | 150          | 1.26         |  |  |
|       | 75  |          | 107   | 62.5 | 100 | 116 | 76 | 67             | 92   | 76             | 11  | 64   | 6   | 300          | 1.85         |  |  |
|       | 80  |          | 110   | 73   |     |     | 78 | —              | 78   | —              | 8.5 | 69   | 5   | 500          | 2.78         |  |  |
|       | 100 |          | 132   | 59.5 |     |     | 76 | 67             | 92   | 76             | 11  | 77   | 5.6 | 400          | 3.95         |  |  |
|       | 127 |          | 159.6 |      |     |     |    |                |      |                |     |      |     |              |              |  |  |
|       |     |          |       |      |     |     |    |                |      |                |     | 92   |     | 550          | 4.86         |  |  |



请按图示订货

| 型号    | 轮部<br>代号 |
|-------|----------|
| 代码 D  | 轮部代号     |
| CFN15 | 75 AF    |

CFN15—D75—AF



未税价(元)

### 优惠价

| 数量 | 1~9  | 10~  |
|----|------|------|
| 价格 | 100% | 另行报价 |



### 交货期

7