


# 高品质 裸压着端子

叉形  
UT系列

| 代码    | 类型       | 材质 | 表面处理 | 焊接方式 |
|-------|----------|----|------|------|
| ZIP18 | 裸压着端子 叉形 | 紫铜 | 镀银   | 接缝焊银 |

特点

- 表面镀银，导电性强，防生锈，防腐蚀，抗氧化；
- 采用加厚铜片，铜片厚实，负载量大，不易发热；
- 采用优良紫铜制作，导电性好，负载量大，电阻率小，接线稳定可靠；
- 接线快速便捷，操作简单且牢固不易脱落。

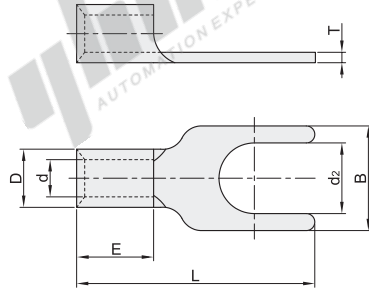

| 销售方式 | 每袋数量   |
|------|--------|
| 袋    | 100PCS |



压着端子

| 型号    |      | 螺丝规格  | 适用电线规格                |       | 外形尺寸           |      |      |        |         |     |     | 包装<br>(PCS/袋) | 适用<br>压接工具       |
|-------|------|-------|-----------------------|-------|----------------|------|------|--------|---------|-----|-----|---------------|------------------|
| 代码    | 压接规格 |       | 截面积(mm <sup>2</sup> ) | AWG   | d <sub>2</sub> | B    | L    | E      | D       | d   | T   |               |                  |
| ZIP18 | 1    | 3     | 0.75~1                | 18~17 | 3.2            | 5.6  | 14.4 | 5      | 3.3±0.2 | 1.6 | 0.8 | 100           | ZIQ07-8<br>(见官网) |
|       |      | 3     |                       |       | 4.2            | 7.6  | 14.9 |        |         |     |     |               |                  |
|       | 1.5  | 4     | 1.2~1.5               | 16~15 | 5.2            | 8.7  | 15.6 | 5      | 3.5±0.2 | 1.9 | 0.8 |               |                  |
|       |      | 5     |                       |       | 6.2            | 9.5  | 16.9 |        |         |     |     |               |                  |
|       | 2.5  | 3     | 2~2.5                 | 14~13 | 3.2            | 6    | 15.5 | 6      | 4.2±0.2 | 2.5 | 1   |               |                  |
|       |      | 4     |                       |       | 4.2            | 7.6  | 16   |        |         |     |     |               |                  |
|       |      | 5     |                       |       | 5.2            | 9    | 18.5 |        |         |     |     |               |                  |
|       |      | 6     |                       |       | 6.2            | 10.2 | 20   |        |         |     |     |               |                  |
|       |      | 4     |                       |       | 4.2            | 7.6  | 18   |        |         |     |     |               |                  |
|       |      | 5     |                       |       | 5.2            | 9    | 19   |        |         |     |     |               |                  |
|       | 4    | 6     | 3~4                   | 12~11 | 6.2            | 11   | 21.4 | 7      | 6.2±0.2 | 4.2 | 1.2 |               |                  |
|       |      | 8     |                       |       | 8.5            | 13.5 | 23   |        |         |     |     |               |                  |
|       |      | 4     |                       |       | 4.2            | 8    | 19.6 |        |         |     |     |               |                  |
|       |      | 5     |                       |       | 5.2            | 9    | 21   |        |         |     |     |               |                  |
|       | 6    | 6     | 5~6                   | 10~9  | 6.2            | 11   | 22.5 | 8.5    | 7.6±0.2 | 5.2 | 1.5 |               |                  |
|       |      | 8     |                       |       | 8.5            | 14   | 25   |        |         |     |     |               |                  |
|       |      | 5     |                       |       | 5.2            | 12   | 27.5 |        |         |     |     |               |                  |
|       | 10   | 6     | 8~10                  | 8~7   | 6.2            | 12   | 28   | 10.5   | 9.9±0.2 | 7   | 1.7 |               |                  |
|       |      | 8     |                       |       | 8.3            | 15   | 31   |        |         |     |     |               |                  |
|       |      | 5     |                       |       | 5.2            | 12   | 27.5 |        |         |     |     |               |                  |
| 6     |      | 6.2   |                       |       | 13             | 28   |      |        |         |     |     |               |                  |
| 16    | 8    | 14~16 | 6~5                   | 8.3   | 16             | 30.5 | 14   | 12±0.2 | 8.6     | 1.7 |     |               |                  |
|       | 10   |       |                       | 10.3  | 18             | 34   |      |        |         |     |     |               |                  |
|       | 12   |       |                       | 12.5  | 19             | 35   |      |        |         |     |     |               |                  |
|       | 6    |       |                       | 6.2   | 14             | 33   |      |        |         |     |     |               |                  |
| 25    | 8    | 22~25 | 4~3                   | 8.3   | 16             | 35   | 14   | 13±0.2 | 9.5     | 1.7 |     |               |                  |
|       | 10   |       |                       | 10.3  | 18             | 36   |      |        |         |     |     |               |                  |
|       | 12   |       |                       | 12.5  | 22             | 42   |      |        |         |     |     |               |                  |
|       | 8    |       |                       | 8.3   | 17.5           | 49   |      |        |         |     |     |               |                  |
| 35    | 10   | 30~35 | 3~2                   | 10.3  | 20             | 39   | 14   | 13±0.2 | 9.5     | 1.7 |     |               |                  |
|       | 12   |       |                       | 12.5  | 25             | 44   |      |        |         |     |     |               |                  |



| 型号    |      | 螺丝规格 |
|-------|------|------|
| 代码    | 压接规格 |      |
| ZIP18 | 1    | 3    |
|       | 1.5  | 5    |

ZIP18—1—3

