


防水型 圆形连接器

两孔法兰插座/弯式电缆插头 SP系列 威浦品牌


WEIPU 威浦电器



视角标准：第一视角


系列	类型	防护等级	外壳颜色
SP系列	两孔法兰插座	IP68	蓝色+黑色
	弯式电缆插头		

两孔法兰插座

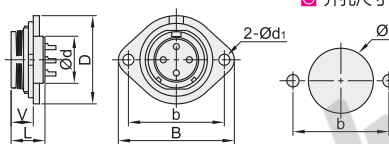

开孔尺寸


弯式电缆插头




电缆直径Ød

孔位排列位(从针的方向看)

SP21系列 (芯数)



SP29系列 (芯数)



两孔法兰插座

型号	芯数	ØD	V	L	b	Ød	Ød1	Ød2	B	触头形状	接线方式	适配插针类型	
												直式电缆插头	弯式电缆插头
SP2113S2	2											SP2110P2	SP2116P2
SP2113S3	3											SP2110P3	SP2116P3
SP2113S4	4											SP2110P4	SP2116P4
SP2113S5	5											SP2110P5	SP2116P5
SP2113S6	6	28.5			31	21	3.6	4	37.5			SP2110P6	SP2116P6
SP2113S7	7											SP2110P7	SP2116P7
SP2113S8	8											SP2110P8	SP2116P8
SP2113S9	9											SP2110P9	SP2116P9
SP2113S12	12											SP2110P12	SP2116P12
SP2113S15	15											SP2110P15	SP2116P15
SP2913S2	2											SP2910P2	
SP2913S3	3											SP2910P3	
SP2913S4	4	13.3		21.5						插孔	焊接	SP2910P4	
SP2913S7	7											SP2910P7	
SP2913S8	8											SP2910P8	
SP2913S9	9											SP2910P9	
SP2913S10	10											SP2910P10	
SP2913S12	12	39			45	27.8	4.5	5	55			SP2910P12	
SP2913S16	16											SP2910P16	
SP2913S17	17											SP2910P17	
SP2913S20	20											SP2910P20	
SP2913S24	24											SP2910P24	
SP2913S26	26											SP2910P26	
SP2913S35	35											SP2910P35	

材料和技术参数

接插方式	螺纹锁紧
外壳材料	热塑性塑料PC, PA66; 防火等级:V-0
绝缘体	热塑性塑料PPS; 耐高温260°C
接触件材料	铜镀金
防护等级	IP68
接插次数	500
温度范围	-40°C~85°C
绝缘电阻	2000MΩ



请按图示订货

弯式电缆插头

型号	芯数	ØD	Ød	L	H	触头形状	接线方式	适配插孔类型		
								电缆对接插座	后螺母插座	两孔法兰插座
SP2116P2	2							SP2111S2	SP2112S2	SP2113S2
SP2116P3	3							SP2111S3	SP2112S3	SP2113S3
SP2116P4	4							SP2111S4	SP2112S4	SP2113S4
SP2116P5	5							SP2111S5	SP2112S5	SP2113S5
SP2116P6	6	29.3	7~12	57	51	插针	焊接	SP2111S6	SP2112S6	SP2113S6
SP2116P7	7							SP2111S7	SP2112S7	SP2113S7
SP2116P8	8							SP2111S8	SP2112S8	SP2113S8
SP2116P9	9							SP2111S9	SP2112S9	SP2113S9
SP2116P12	12							SP2111S12	SP2112S12	SP2113S12
SP2116P15	15							SP2111S15	SP2112S15	SP2113S15

电气技术特性

SP21系列										
芯数	2	3	4	5	6	7	8	9	12	15
额定电流(A)			30		25&5	15	10			
接触件直径(mm)	Ø3×2	Ø3×3	Ø3×4	Ø3×5	Ø2.5×4&Ø1×2	Ø2×7	Ø1.5×10	Ø1×9	Ø1×12	Ø1×15
工作电压(AC.V)				500					400	
耐压(AC.V)1min				1500					1200	
接触电阻(mΩ)			1		1&5	2.5			5	
线规(mm²/AWG)			≤4/12		≤4/12&≤0.75/18		≤2/14		≤0.75/18	

SP29系列															
芯数	2	3	4	7	8	9	10	12	16	17	20	24	26	35	
额定电流(A)		50			25		25&5	25		10			5		
接触件直径(mm)		Ø3.5×2	Ø3.5×3	Ø2.5×4	Ø2.5×7	Ø2.5×8	Ø2.5×4&Ø1×5	Ø2.5×10	Ø1.5×12	Ø1.5×16	Ø1.5×17	Ø1×20	Ø1×24	Ø1×26	Ø1×35
工作电压(AC.V)							500						400		
耐压(AC.V)1min							1500						1200		
接触电阻(mΩ)		0.5			1		1&5	1		2.5			5		
线规(mm²/AWG)		≤10/7			≤4/11		≤4/11&≤0.75/18	≤4/11		≤2/14			≤0.75/18		

连接器