

四点角接触球轴承


接触角30°

等截面超薄壁轴承

代码	类型	轴承精度	轴承材质		接触角(°)	型号解析
			国标	相当		
BFB11	四点角接触球轴承	GB/T 307.1 0级	GCr15	SUJ2	30	J(双面带橡胶密封圈) U(超宽截面尺寸B,B ₁) X(四点角接触球轴承)



安装图

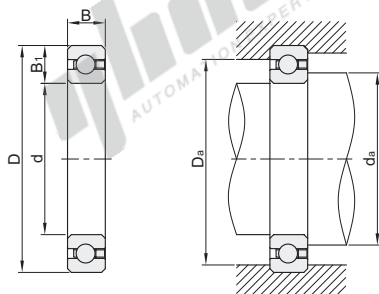

视角标准：第一视角

型号		d	D	B	B ₁	径向		轴向		容许力矩(N·m)		极限转速 (r/min)	空载极限 转矩 (N·m)	安装尺寸		重量 (kg) 参考	
代码	轴承型号					基本额定负载(KN)											
						Cr(动)	Cor(静)	Ca(动)	Coa(静)	Cr(动)	Cor(静)						
BFB11	JU040X	101.6	120.65			4.02	5.96	6.28	14.96	208	408	620			105.41	115.49	0.25
	JU042X	107.95	127			4.16	6.31	6.51	15.81	224	464	590	0.02		111.76	121.84	0.26
	JU045X	114.3	133.35			4.29	6.65	6.76	16.66	248	512	550			118.11	128.19	0.28
	JU047X	120.65	139.7			4.42	6.99	6.99	17.52	264	568	520	0.03		124.46	134.49	0.3
	JU050X	127	146.05			4.55	7.36	7.22	18.37	288	624	500			130.81	140.84	0.31
	JU055X	139.7	158.75			4.79	8.04	7.64	20.08	328	744	450	0.04		143.51	153.47	0.34
	JU060X	152.4	171.45			5.03	8.72	8.08	21.79	376	880	410			156.21	166.17	0.37
	JU065X	165.1	184.15	12.7	9.53	5.26	9.41	8.50	23.52	424	1024	380	0.05		168.91	178.74	0.4
	JU070X	177.8	196.85			5.48	10.09	8.90	25.23	480	1176	350	0.06		181.61	191.44	0.42
	JU075X	190.5	209.55			5.71	10.77	9.29	26.93	528	1344	330			194.31	204.14	0.45
	JU080X	203.2	222.25			5.92	11.46	9.69	28.64	584	1520	310	0.07		207.01	216.84	0.48
	JU090X	228.6	247.65			6.32	12.82	10.44	32.05	704	1904	220	0.09		232.41	242.19	0.54
	JU100X	254	273.05			6.72	14.19	11.17	35.47	824	2336	200	0.11		257.81	267.59	0.59
	JU110X	279.4	298.45			7.09	15.56	11.88	38.92	960	2808	180	0.13		283.21	292.99	0.65
	JU120X	304.8	323.85			7.45	16.92	12.56	42.32	1096	3320	160	0.16		308.61	318.39	0.71

1kgf=9.81N



请按图示订货

代码	轴承型号
BFB11	JU040X
	JU042X
	JU045X
	JU047X
	JU050X
	JU055X
	JU060X
	JU065X
	JU070X
	JU075X
	JU080X
	JU090X
	JU100X
	JU110X
	JU120X

BFB11—JU040X



未税价(元)

● 优惠价

数量	1~9	10~
价格	100%	另行报价



交货期

6

怡合达
AUTOMATION EXPERT
自动化专家