


陶瓷氮化硅轴承

◀ 无防尘盖式



代码	类型	材质			推荐使用最高温度
		套圈	球体	保持架	
BBD15	标准型	Si3N4	Si3N4	PTFE	180°C
BBD16				PEEK	260°C

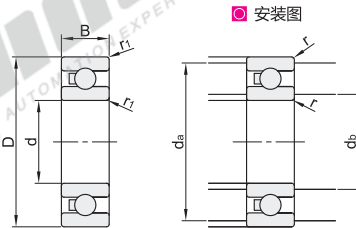

视角标准：第一视角

代码	型号 轴承型号	d	D	B	r1	安装尺寸			参考重量 (g)	
						da(min)	da(max)	r(max)		
BBD15 BBD16	683	3	7	2	0.1	3.9	5.8	0.1	0.74	
	693		8				6.8		1.46	
	603		9	3		0.15	4.2	7.8	0.15	2.17
	623		10	4				8.8		3.95
	633	4	13	5		4.6	11.4	0.2	7.9	
	684		9	2.5	0.1	5	7.8	0.1	1.5	
	694		11		0.15	5.2	9.8	0.15	4	
	604		12	4		0.2	5.6	10.4	0.2	5.3
	624	5	13	5			11.4		7.2	
	634		16	5	0.3	6	14	0.3	12.4	
	685		11	3	0.15	6.2	9.8		2.8	
	695		13	4		0.2	6.6	11.4	0.2	5.9
	605	6	14	5			12.4		8.4	
	625		16		0.3	7	14	0.3	11.9	
	635		19	6			17		20.4	
	686		13	3.5	0.15	6.2	11.8	0.2	4.6	
	696	7	15	5	0.2	7.6	13.4		9.2	
	606		17				15		14.2	
	626		19	6	0.3	8	17	0.3	19.9	
	636		22	7			20		33.3	
	687	8	14	3.5	0.15	8.2	12.8	0.15	5.2	
	697		17	5			15		12.5	
	607		19	6	0.3	9	17	0.3	18.3	
	627		22	7			20		30.2	
	637	9	26	9			22		57.1	
	688		16	4	0.2	9.6	14.4	0.2	11.7	
	698		19	6			17		17.2	
	608		22	7	0.3	10	20	0.3	28.6	
	628	10	24	8			22		40.5	
	638		28	9			26		67.4	
	689		17	4	0.2	10.6	15.4	0.2	8.4	
	699		20	6			18		20.1	
	609	11	24	7	0.3	11			34.8	
	629		26	8			22		46.9	
	639		30	10	0.6	13	24	0.3	87	
	6800		19	5			17		12.1	
	6900	12	22	6	0.3	12	20		21.5	
	6000		26	8			24		43	
	6200		30	9	0.6		26	0.6	76	
	6300		35	11			31		124	
	6801	13	21	5			19		14.7	
	6901		24	6	0.3	14	22	0.3	24.1	
	16001		28	7			26		45.9	
	6001		8						49.2	
	6201	14	32	10	0.6	16	28	0.6	87	
	6301		37	12	1		32	1	97	
	6802		24	5			22		16.2	
	6902		28	7	0.3	17	26	0.3	26.3	
16002	15	32	8			30		63		
6002		9						74		
6202		35	11	0.6	19	31	0.6	108		

轴承
关节
轴承

E7

陶瓷氮化硅轴承

无防尘盖式

代码	型号 轴承型号	d	D	B	r ₁	安装尺寸			参考重量 (g)
						d ₆ (min)	d _a (max)	r(max)	
	6302	15	42	13	1	20	37	1	198
	6803		26	5			24		16.2
	6903		30	7			28		40.4
	16003		35	8	0.3	19	33	0.3	78
	6003	17	40	10					98
	6203		40	12	0.6	21	36	0.6	160
	6303		47	14	1	22	42		266
	6403		62	17	1.1	23.5	55.5	1	642
	6804		32	7			30		40
	6904		37	9	0.3	22	35	0.3	137
	16004		42	8			40		114
	6004	20	42	12	0.6	24	38	0.6	161
	6204		47	14	1	25	42		258
	6304		52	15	1.1	26.5	45.5	1	348
	6404		72	19	1.1	27.5	46.5	1.1	960
	6805		37	7			35		46
	6905		42	9	0.3	27	40	0.3	102
	16005		47	8			45		140
	6005	25	47	12	0.6	29	43	0.6	188
	6205		52	15	1	30	47		308
	6305		62	17	1.1	31.5	55.5	1	563
	6405		80	21	1.5	32.5	56.5	1.1	1260
	6806		42	7			40		57
	6906		47	9	0.3	32	45	0.3	124
	16006		55	13			53		207
	6006	30	55	13			50		275
	6206		62	16	1	35	57	1	471
	6306		72	19	1.1	36.5	65.5		826
	6406		90	23	1.5	37.5	66.5	1.1	1760
	6807		47	7	0.3	37	45	0.3	64
	6907		55	10	0.6	39	51	0.6	178
	16007		62	9	0.3	37	60	0.3	258
	6007	35	62	14	1	40	57		362
	6207		72	17	1.1	41.5	65.5	1	675
	6307		80	21	1.5	43	72		1099
	6407		100	25	1.5	46	89	1.5	2260
	6808		52	7	0.3	42	50	0.3	69
	6908		62	12	0.6	44	58	0.6	252.2
	16008		68	9	0.3	42	66	0.3	305
	6008	40	68	15	1	45	63		457
	6208		80	18	1.1	46.5	73.5	1	1740
	6308		90	23	1.5	48	82	1.5	1520
	6408		210	27	2	49	101	2	2929
	6809		58	7	0.3	47	56	0.3	90
	6909		68	12			64		304
	16009		75	10	0.6	49	71	0.6	402
	6009	45	75	16	1	50	70		576
	6209		85	19	1.1	51.5	78.5	1	996
	6309		100	25	1.5	53	92	1.5	1975
	6409		120	29	2	54	111	2	3640
	6810		65	7	0.3	52	63	0.3	119
	6910		72	12			68		326
	16010		80	10	0.6	54	76	0.6	414
	6010	50	80	16	1	55	75		620
	6210		90	20	1.1	56.5	83.5	1	1088
	6310		110	27	2	59	101		2520
	6410		130	31	2.1	61	119	2	4470

BBD15
BBD16

轴承
关节
轴承

E7



请按图示订货

型号	
代码	轴承型号
BBD15	683
BBD16	693

BBD15—683



未税价(元)

优惠价		
数量	1~9	10~
价格	100%	另行报价



交货期

7

