


代码	类型	材质					
		护套	法兰	发热丝	引出线	线缆	绝缘粉末
ZIM96	带法兰感温型	SUS321	SUS304	Ni80Cr20	纯镍耐热线	Ni-GB	MgO


○ 注意事项

- 最高使用温度为铠装管部温度，导线最高耐温200℃，导线务必从安装孔引出；
- 请勿使加热管露出被加热物体在大气中空烧；
- 使用温度500℃以下。

❗ 不适用在运动设备上，需单独定制。

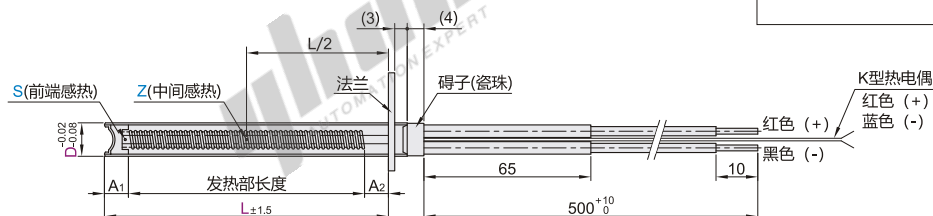

法兰尺寸



视角标准：第一视角

型号		L	额定功率 W _{±5%}	额定电压 V _{±5%}	感热部位	冷端长度A	发热部长度
代码	D						
ZIM96	8	50	80	220	S (前端感热) Z (中间感热)	A=A ₁ +A ₂ A ₁ =7 A ₂ =8	L-A
			100				
			80				
		160					
		200					
		120	280				
			260				
			350				
		200	500				
	600						
	900						
	10	50	90				
			120				
			150				
		80	200				
			250				
			350				
		120	320				
			450				
			550				
	12	200	850				
			1000				
			90				
		50	150				
140							
180							
80		250					
		380					
		300					
120	500						
	550						
	750						
200	950						
	1200						

其它长度可定制。



型号		L	额定功率 W $\pm 5\%$	额定电压 V $\pm 5\%$	感热部位
代码	D				
IM96	8	50	80	220	S Z
			100		

ZJM96—D8—L50—W80—V220—S