





代码	类型	材质		表面处理
		①	③④⑥	①③④⑥
LEF25	整合型传动座 矮型	铸铁	S45C	发黑

构成零件

编号	零件名称	数量
①	传动座本体	1
②	轴承	1组
③	压板	1
④	间隔环	2
⑤	油封	2
⑥	锁紧螺母	1组

① 使用之轴承经预压处理，轴向0间隙。

① 轴承采用P5配DF组装，最适宜滚珠丝杆使用。

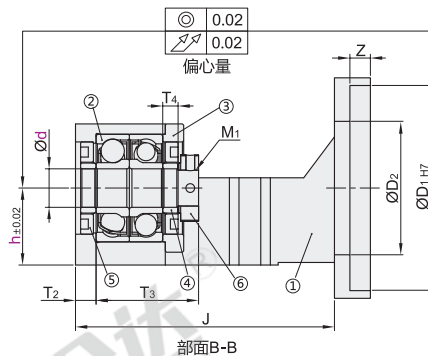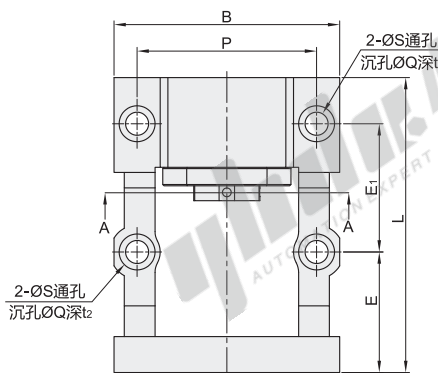

视角标准：第一视角

型号			适用电机类型	ØD ₁	P.C.D	M	Z	ØD ₂	B	P	L	J	E	E ₁	S	Q	t ₁	t ₂	H	H ₁	W ₁	T ₁	T ₂	T ₃	T ₄	M ₁	建议丝杠支座	建议电机规格															
代码	适用丝杠轴径	适用电机法兰																									中心高	支撑侧	止口规格	安装P.C.D													
LEF25	15	80S	30	70	90	M5	6				113	45							55	40		22		40	6	M15×1.0	LEB31-15	70	90														
		80				M6	8																							115	47		55	40		24		46	9	M17×1.0	LEB74-17		
		90																																							LEB51-15		
	17	80	30	70	90	M5	6	52	88	70	113	102	45	50	9	14	8	1	55	40	54	30	8	43	8	M20×1.0	LEB71-17	70	90														
		80S	30																								M6			8	115	47		55	40	54							
		80	34																								M5			8	113	45		59	44								
	20	80S	30			M6	8				115	47				55	40	22		40	6	M15×1.0	LEB31-20	73	98.4																		
		80																					LEB51-20																				
		80																					34					LEB71-20															
	15	86	30	73	98.4	M6	8				115	47						55	40		22		40	6	M15×1.0	LEB31-15	73	98.4															
																										80			LEB31-20														
		34																59	44		30		43	8	M20×1.0	LEB71-20																	

① *带S为松下电机，不带为其它品牌电机。



请按图示订货

型号		
代码	适用丝杠轴径 d	适用电机法兰 F
LEF25	15	60S
		80

LEF25—d15—F80S—h30



未税价(元)

优惠价

数量	1~4	5~
价格	100%	另行报价



交货期

7