

欧标40槽宽10.2系列铝合金型材


◀ 边长40/80mm

代码	材质	表面处理
AOB02	A6063-T6	碱砂氧化
AOH02	A6005-T6	
AOB03	A6063-T5	黑色氧化
AOB05		喷砂氧化

- ① 切断面未进行氧化处理。
- ② 最大使用长度：5800~5850mm；
整条标准长度：6000~6020mm。
- ③ 可定制表面处理。




🟡 L长度公差

L ≤ 1000mm




(当L > 1000mm时, 长度尺寸公差±0.5)


🟢 槽口详图




AOB02-H4040
AOB03-H4040
AOB05-H4040




AOH02-4040




AOB02-H4040C




AOB02-H4040E




AOB02-H4040A
AOB03-H4040A




AOB02-H4040B
AOB03-H4040B




AOB02-H4040H




AOB02-H4040T




AOB02-H4040R




AOB02-H4040RS




AOB02-H4060




AOB02-H4080
AOB03-H4080
AOB05-H4080

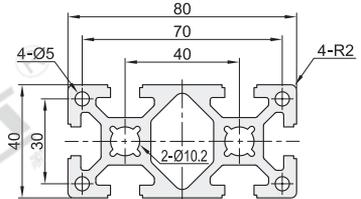


AOH02-4080



AOB02-H4080C

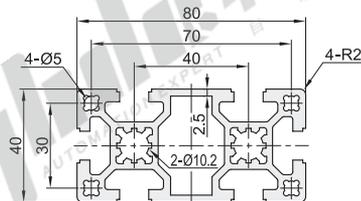


AOB02-H4080H

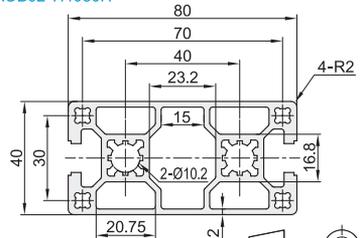


视角标准：第一视角


AOB02-H8080
AOB03-H8080

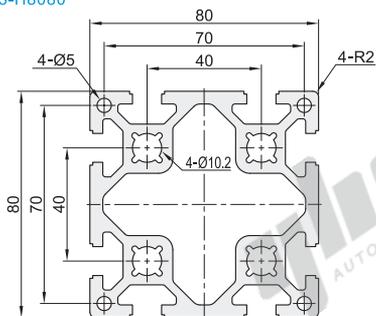


AOB02-H8080C

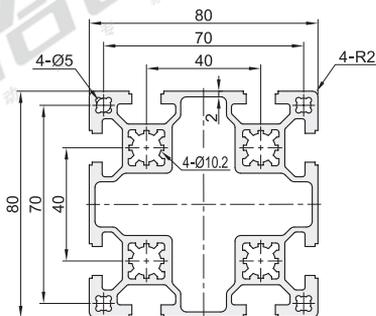


AOB02-H8840




AOB02-H8840R

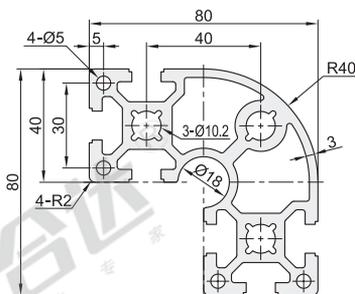


AOB02-H40120C

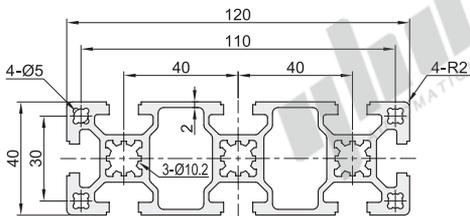



AOB02-H40160C

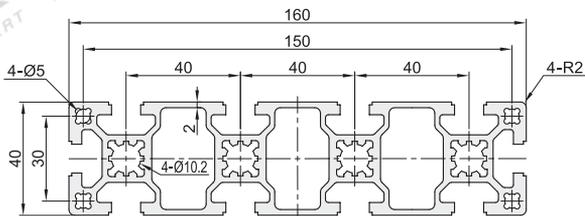

AOB02-H80120

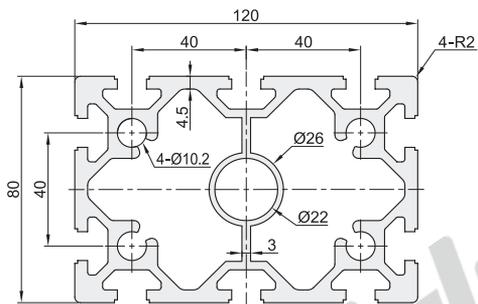

AOB02-H120120

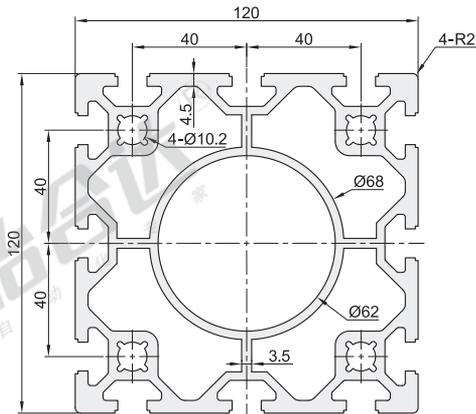


视角标准：第一视角

欧标40槽宽10.2系列铝合金型材

边长160mm

AOB02-H80160

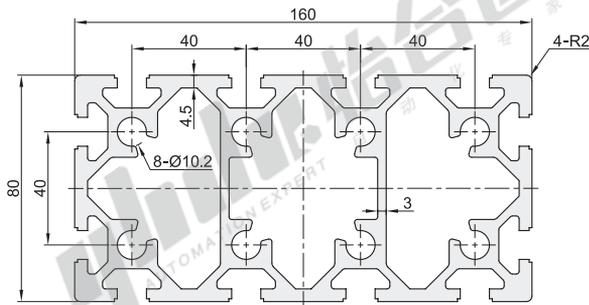

代码	型号 规格	L 最小单位0.5	截面尺寸	每米重量Kg/m (理论值)	截面积 (mm ²)	截面惯性矩		抗弯截面模数	
						I _x	I _y	W _{xmax} (mm ³)	W _y (mm ³)
AOB02	H4040	50~6000	40×40	2.00	724.84	11.58×10 ⁴	11.58×10 ⁴	5792.15	5792.15
	H4040A			1.71	621.97	10.23×10 ⁴	10.30×10 ⁴	4977.26	5148.80
	H4040B			1.70	618.19	10.25×10 ⁴	10.25×10 ⁴	5098.23	5098.23
	H4040C			1.78	647.87	10.69×10 ⁴	10.69×10 ⁴	5346.25	5346.25
	H4040E			1.56	566.13	9.07×10 ⁴	9.07×10 ⁴	4534.00	4534.00
	H4040H			1.64	596.08	9.813×10 ⁴	9.903×10 ⁴	4906.50	4951.50
	H4040T			1.71	619.52	9.784×10 ⁴	10.003×10 ⁴	4849.75	5001.38
	H4040R			1.46	528.63	7.59×10 ⁴	7.58×10 ⁴	3410.66	3410.66
	H4040RS			1.41	511.61	5.325×10 ⁴	8.313×10 ⁴	2325.08	3629.75
	H4060			2.34	848.00	13.47×10 ⁴	27.93×10 ⁴	6734.45	9311.60
	H4080			3.64	1324.10	22.41×10 ⁴	81.28×10 ⁴	11206.10	20318.65
	H4080C			3.04	1104.02	19.21×10 ⁴	73.06×10 ⁴	9603.10	18266.03
	H4080H			2.87	1043.15	18.673×10 ⁴	70.919×10 ⁴	9336.42	17729.87
	H8840			4.67	1699.32	101.00×10 ⁴	101.00×10 ⁴	21964.98	21964.98
	H8840R			4.61	1676.82	94.11×10 ⁴	94.21×10 ⁴	21233.83	21247.60
	H8080			5.92	2153.30	151.28×10 ⁴	151.28×10 ⁴	37820.48	37820.48
H8080C	4.70	1706.89	122.50×10 ⁴	122.50×10 ⁴	30623.68	30623.68			
H40120C	4.15	1509.82	25.99×10 ⁴	221.75×10 ⁴	12998.85	36957.48			
H40160C	5.34	1940.79	33.65×10 ⁴	491.21×10 ⁴	16825.15	61401.30			
H80120	7.91	2876.99	223.86×10 ⁴	468.05×10 ⁴	55963.90	78008.35			
H80160	10.46	3802.91	299.15×10 ⁴	1016.18×10 ⁴	74787.25	127022.98			
H120120	11.05	4016.02	668.58×10 ⁴	668.56×10 ⁴	111429.95	111426.12			
AOH02	4040		40×40	2.24	813.02	13.23×10 ⁴	13.23×10 ⁴	6615.00	6615.00
	4080		40×80	3.75	1362.86	24.30×10 ⁴	90.15×10 ⁴	12150.35	22536.60
AOB03	H4040		40×40	2.00	724.84	11.58×10 ⁴	11.58×10 ⁴	5792.15	5792.15
	H4040A		40×40	1.71	621.97	10.23×10 ⁴	10.30×10 ⁴	4977.26	5148.80
	H4040B		40×40	1.70	618.19	10.25×10 ⁴	10.25×10 ⁴	5098.23	5098.23
	H4080		40×80	3.64	1324.10	22.41×10 ⁴	81.28×10 ⁴	11206.10	20318.65
AOB05	H8080		80×80	5.92	2153.30	151.28×10 ⁴	151.28×10 ⁴	37820.48	37820.48
	H4040		40×40	2.00	724.84	11.58×10 ⁴	11.58×10 ⁴	5792.15	5792.15
	H4080		40×80	3.64	1324.10	22.41×10 ⁴	81.28×10 ⁴	11206.10	20318.65

槽宽102系列
欧标40



请按图示订货

型号	规格	L 最小单位0.5	截面尺寸
AOB02	H4040 H4040A	50~6000	40×40

AOB02—H4040A—L550

可选加工

型号	规格	L 最小单位0.5	可选加工代码
AOB02	H4040 H4040A	50~6000	LM RM DM

AOB02—H4040A—L550—RM



可选加工

端面螺孔加工

代码	技术说明	
		变更通孔为螺孔
	选型方法	LM/RM/DM
	LM(左端面)	
	RM(右端面)	
	DM(双端面)	
	Ø10.2通孔变更为螺孔M12深28。	

AOB02-H4040R/AOB02-H8840R仅适用端面螺孔加工。

可选加工见P603~608。

