


插头/插座 ▶
5.08mm间距

线对线型尼龙连接器

代码	类型	材质		阻燃等级
		胶壳	端头	
ZKY13	5.08mm间距	PA66	磷黄铜	UL94V-0
ZKY14	插座			




插头
ZKY13

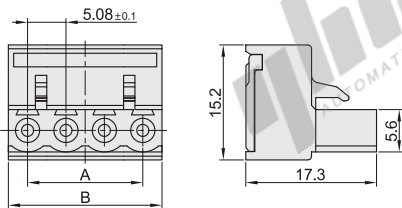


芯数	A	B
2	5.08	10.16
3	10.16	15.24
4	15.24	20.32
5	20.32	25.4
6	25.4	30.48
7	30.48	35.56
8	35.56	40.64
9	40.64	45.72
10	45.72	50.8
14	66.04	71.12
18	83.36	91.44
20	96.52	101.6
24	116.84	121.92

插座
ZKY14

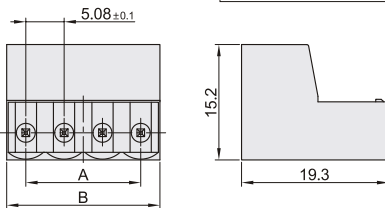

芯数	A	B
2	5.08	10.98
3	10.16	16.06
4	15.24	21.14
5	20.32	26.22
6	25.4	31.3
7	30.48	36.38
8	35.56	41.46
9	40.64	46.54
10	45.72	51.62
14	66.04	72.62
18	83.36	92.94
20	96.52	103.1
24	116.84	123.42



视角标准：第一视角

插头

型号		端头间距	额定电压 (V)	额定电流 (A)	适配插座
代码	芯数				
ZKY13	2	5.08	300	15	ZKY14
	3				
	4				
	5				
	6				
	7				
	8				
	9				
	10				
	14				
	18				
	20				
	24				

插座

型号		端头间距	额定电压 (V)	额定电流 (A)	适配插头
代码	芯数				
ZKY14	2	5.08	300	15	ZKY13
	3				
	4				
	5				
	6				
	7				
	8				
	9				
	10				
	14				
	18				
	20				
	24				



请按图示订货

插头

型号	
代码	芯数
ZKY13	2
	3

ZKY13—2

插座

型号	
代码	芯数
ZKY14	2
	3

ZKY14—2

连
接
器