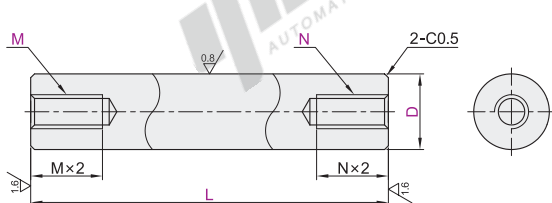


转轴

两端内螺纹型·标准型 直杆型

代码	类型	D公差	材质		表面处理
			国标	相当	
MAI01	两端 内螺纹型	g6	45	S45C	发黑
MAI02			0Cr18Ni9	SUS304	无电解镀镍
MAI16			35CrMo	SCM435	发黑
MAI21			35CrMo	硬度28~33HRC	无电解镀镍
MAI22		h7	45	S45C	发黑
MAI41			0Cr18Ni9	SUS304	无电解镀镍
MAI42			45	S45C	发黑
MAI46			0Cr18Ni9	SUS304	无电解镀镍
MAI61		h9	45	S45C	发黑
MAI62			0Cr18Ni9	SUS304	无电解镀镍



D	g6	h7	h9
4~6	-0.004 -0.012	0 -0.012	0 -0.030
8~10	-0.005 -0.014	0 -0.015	0 -0.036
12~18	-0.006 -0.017	0 -0.018	0 -0.043
20~30	-0.007 -0.020	0 -0.021	0 -0.052
35~50	-0.009 -0.025	0 -0.025	0 -0.062

① 圆度·直线度·垂直度·同轴度，请参阅转轴产品简介。



g6

型号	最小单位0.1	M·N
代码	D _{g6}	L
MAI01 MAI02 MAI16 MAI21 MAI22	4	12.0~200.0
	5	12.0~250.0
	6	18.0~300.0
	8	18.0~400.0
	10	18.0~500.0
	12	25.0~600.0
	13	25.0~700.0
	15	25.0~800.0
	16	25.0~800.0
	17	35.0~800.0
	18	35.0~800.0
	20	35.0~800.0
	22	35.0~800.0
	25	45.0~800.0
	30	55.0~800.0
	35	65.0~800.0
	40	75.0~800.0
	50	95.0~800.0



型号	D	L	M·N
MAI01	4	25.0~600.0	5 6 8
MAI02	13	25.0~600.0	5 6 8

MAI02—D12—L30—M6—N6

④ 可选加工

型号	D	L	M·N	可选加工代码
MAI01	4	25.0~600.0	5 6 8	④ LA()...
MAI02	13	25.0~600.0	5 6 8	④ LA()...

MAI02—D12—L30—M6—N6—LC



数量	1~19	20~
价格	100%	另行报价

未税价(元)



① 无表面处理



① 有表面处理

h7



型号	最小单位0.1	M·N
代码	D _{h7}	L
MAI41 MAI42 MAI46	4	12.0~200.0
	5	12.0~250.0
	6	18.0~300.0
	8	18.0~400.0
	10	18.0~500.0
	12	25.0~600.0
	15	25.0~700.0
	20	35.0~800.0
	25	45.0~800.0
	30	55.0~800.0
	35	65.0~800.0
	40	75.0~800.0
	50	95.0~800.0

h9

型号	最小单位0.1	M·N
代码	D _{h9}	L
MAI61 MAI62 MAI66	4	12.0~200.0
	5	12.0~250.0
	6	18.0~300.0
	8	18.0~400.0
	10	18.0~500.0
	12	25.0~600.0
	15	25.0~700.0
	20	35.0~800.0
	25	45.0~800.0
	30	55.0~800.0
	35	65.0~800.0
	40	75.0~800.0
	50	95.0~800.0



可选加工

可 选 加 工	变更L尺寸公差	增加平面	增加键槽	增加开口凸轮用槽																												
		增加1处平面LA()  增加2处平面LB() 	增加1处键槽KB()  增加2处键槽KC() 																													
代 码	LC	LA()-LB()	KB()-KC()	KD()																												
技 术 说 明	选型方法 LC ④ L<400变更为L±0.05 L≥400变更为L±0.1	选型方法 LA10-G3 选型方法 LB10-J3-Y10-X3 ④ 最小单位1 ④ 指定G-J-X时，须为50以下	选型方法 KB50-S10 选型方法 KC50-C8-K40-T10 ④ 最小单位1 ④ KB-KC-K=0, KB+S≥L, KC+C+T+K≥L, 键槽如右图形状  ④ 指定S-T-C时，须为100以下 ④ 需要3处键槽时，请同时选择KB与KC ④ 键槽详情见转轴产品简介。	选型方法 KD10 ④ 最小单位1 ④ 适用于下表D规格																												
		<table><tr><th>D</th><th>H</th></tr><tr><td>6~17</td><td>1</td></tr><tr><td>18~40</td><td>2</td></tr><tr><td>50</td><td>3</td></tr></table>	D	H	6~17	1	18~40	2	50	3	<table><tr><th>D</th><th>H</th></tr><tr><td>6~17</td><td>1</td></tr><tr><td>18~40</td><td>2</td></tr><tr><td>50</td><td>3</td></tr></table>	D	H	6~17	1	18~40	2	50	3	<table><tr><th>D</th><th>d</th><th>V2</th></tr><tr><td>6</td><td>5</td><td rowspan="2">4</td></tr><tr><td>8</td><td>7</td></tr><tr><td>10</td><td>8</td><td rowspan="2">5</td></tr><tr><td>12</td><td>10</td></tr></table>	D	d	V2	6	5	4	8	7	10	8	5	12
D	H																															
6~17	1																															
18~40	2																															
50	3																															
D	H																															
6~17	1																															
18~40	2																															
50	3																															
D	d	V2																														
6	5	4																														
8	7																															
10	8	5																														
12	10																															