

矩形弹簧



超压缩量弹簧(浅蓝色)

代码	类型	材质		最大压缩量
		国标	相当	
YSWU	超压缩量	60Si2CrA	SWOSC-V	L×60%

□ L尺寸公差

L	公差
50以下	±0.5
50以上	±1.5%

- ① 载荷(±10%)
- ① 直角度(3°以下)
- ① 载荷(N)=定数(N/mm)×压缩量
- ① 使用次数: 100万次(L×65%为30万次)
- ① 耐热温度为150°C
- ① 1kgf=9.81N
- ① 压紧长度为参考值, 制作时会
有少许差异。
- ① 弹簧颜色和圈数可能会因生产
批次不同而异, 但产品性能均
符合标准, 不影响使用!

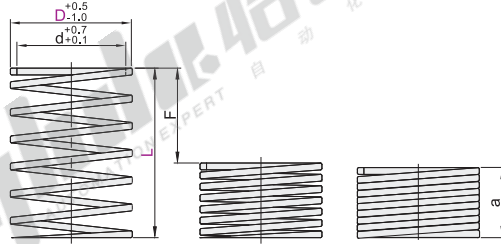

型号	内径	弹簧常数	a	使用方法			
				F=L×60%	F=L×60%		
代码	D	L	d	压紧长度	负载N		
YSWU	10.5	6.0	68.6	15	7.63	4.5	9
				20	5.68	6	12
				25	4.61	7.5	15
				30	3.82	9	18
				35	3.23	10.5	21
				40	2.84	12	24
				45	2.55	13.5	27
				50	2.25	15	30
				55	2.06	16.5	33
				60	1.86	18	36
65	1.76	19.5	39				
70	1.67	21	42				
75	1.57	22.5	45				
80	1.47	24	48				
15	8.72	4.5	9				
20	6.54	6	12				
25	5.22	7.5	15				
30	4.35	9	18				
35	3.73	10.5	21				
40	3.26	12	24				
45	2.90	13.5	27				
50	2.62	15	30				
55	2.37	16.5	33				
60	2.18	18	36				
65	2.01	19.5	39				
70	1.86	21	42				
75	1.74	22.5	45				
80	1.64	24	48				
90	1.45	27	54				
100	1.31	30	60				
15	10.90	4.5	9				
20	8.13	6	12				
25	6.57	7.5	15				
30	5.49	9	18				
35	4.70	10.5	21				
40	4.12	12	24				
45	3.62	13.5	27				
50	3.23	15	30				
55	2.94	16.5	33				
60	2.74	18	36				
65	2.55	19.5	39				
70	2.35	21	42				
75	2.15	22.5	45				
80	2.05	24	48				
90	1.86	27	54				
100	1.66	30	60				
110	1.49	33	66				
120	1.36	36	72				
125	1.27	37.5	75				
150	1.09	45	90				
20	12.26	6	12				
25	9.80	7.5	15				
30	8.13	9	18				
35	6.96	10.5	21				
40	6.17	12	24				
45	5.49	13.5	27				
50	4.90	15	30				
55	4.41	16.5	33				
60	4.11	18	36				
65	3.72	19.5	39				
70	3.53	21	42				
75	3.23	22.5	45				
80	3.04	24	48				
90	2.74	27	54				
100	2.45	30	60				

型号	内径	弹簧常数	a	使用方法			
				F=L×60%	F=L×60%		
代码	D	L	d	压紧长度	负载N		
YSWU	17	10.5	147.0	110	2.23	33	66
				120	2.04	36	72
				125	1.96	37.5	75
				150	1.66	45	90
				175	1.40	52.5	105
				25	15.04	7.5	15
				30	12.55	9	18
				35	10.78	10.5	21
				40	9.41	12	24
				45	8.33	13.5	27
50	7.64	15	30				
55	6.86	16.5	33				
60	6.27	18	36				
65	5.78	19.5	39				
70	5.39	21	42				
75	5.00	22.5	45				
80	4.70	24	48				
90	4.21	27	54				
100	3.72	30	60				
110	3.33	33	66				
120	3.13	36	72				
125	3.04	37.5	75				
130	2.84	39	78				
140	2.64	42	84				
150	2.54	45	90				
175	2.15	52.5	105				
200	1.88	60	120				
30	16.37	9	18				
35	14.02	10.5	21				
40	12.25	12	24				
45	10.88	13.5	27				
50	9.80	15	30				
55	8.92	16.5	33				
60	8.13	18	36				
65	7.55	19.5	39				
70	6.96	21	42				
75	6.57	22.5	45				
80	6.17	24	48				
90	5.49	27	54				
100	4.90	30	60				
110	4.41	33	66				
120	4.11	36	72				
125	3.92	37.5	75				
130	3.72	39	78				
140	3.53	42	84				
150	3.23	45	90				
175	2.84	52.5	105				
200	2.45	60	120				
225	2.18	67.5	135				
250	1.96	75	150				
35	17.75	10.5	21				
40	15.49	12	24				
45	13.82	13.5	27				
50	12.45	15	30				
55	11.29	16.5	33				
60	10.39	18	36				
65	9.56	19.5	39				
70	8.82	21	42				
75	8.28	22.5	45				
80	7.74	24	48				
90	6.86	27	54				
100	6.17	30	60				
110	5.68	33	66				
120	5.19	36	72				
125	5.00	37.5	75				

型号	内径	弹簧常数	a	使用方法			
				F=L×60%	F=L×60%		
代码	D	L	d	压紧长度	负载N		
YSWU	31	21	372.7	130	4.80	39	78
				140	4.41	42	84
				150	4.11	45	90
				160	3.92	48	96
				170	3.62	51	102
				31	3.53	52.5	105
				180	3.43	54	108
				190	3.53	57	114
				200	3.23	60	120
				250	2.45	75	150
300	2.05	90	180				
40	19.20	12	24				
45	17.07	13.5	27				
50	15.36	15	30				
55	13.97	16.5	33				
60	12.80	18	36				
65	11.82	19.5	39				
70	10.97	21	42				
75	10.24	22.5	45				
80	9.60	24	48				
90	8.54	27	54				
100	7.68	30	60				
110	6.98	33	66				
120	6.40	36	72				
130	5.91	39	78				
140	5.49	42	84				
150	5.12	45	90				
160	4.80	48	96				
170	4.52	51	102				
180	4.27	54	108				
190	4.04	57	114				
200	3.84	60	120				
225	3.41	67.5	135				
250	3.07	75	150				
275	2.79	82.5	165				
300	2.56	90	180				
50	19.61	15	30				
60	16.34	18	36				
70	14.01	21	42				
80	12.26	24	48				
90	10.90	27	54				
100	9.81	30	60				
110	8.92	33	66				
120	8.17	36	72				
130	7.54	39	78				
140	7.00	42	84				
150	6.54	45	90				
160	6.13	48	96				
170	5.77	51	102				
180	5.45	54	108				
190	5.16	57	114				
200	4.90	60	120				
225	4.36	67.5	135				
250	3.92	75	150				
275	3.57	82.5	165				
300	3.27	90	180				

请按图示订货 YSWU — D10.5 — L15

代码	型号	内径
YSWU	D	d
	10.5	6

● 优惠价
数量 1~9 10~
价格 100% 另行报价

交货期 **3**

未税价(元)