

D型孔同步轮

S3M/S5M型

齿距3.0/5.0

同步轮

F3

代码	带轮类型	皮带宽度	齿距	材质		表面处理
				带轮	法兰	
EBD01	S3M060	6	3.0	铝合金	铝合金	本色阳极氧化
	S3M100	10				
	S3M150	15				
	S5M100	10	5.0			
	S5M150	15				
	S5M250	25				




轴孔D螺孔尺寸表


轴孔内径d	M	附件紧定螺钉
5	M3	M3×3
6~12	M4	M4×3

轴孔台阶尺寸表


轴孔规格d _{H8}	t公差
5	+0.018 0
6.35	0.5
8	+0.022 0
9.5	1
12	+0.027 0

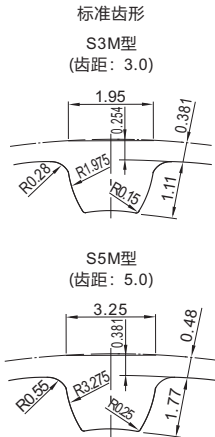

带轮形状: A形



轴孔规格: D



* $t_1 = (W-A)/2 - 0.5$

视角标准: 第一视角

S3M型

型号	代码	齿数	带轮类型	带轮形状	轴孔规格	轴孔规格d _{H8}					V	带轮公称宽度	
						A形						A	W
EBD01	18					17.19	16.43	20	13	2	皮带宽度6 S3M060 A:7 W:11		
	19				5 6.35	18.14	17.38						
	20					19.1	18.34	22	14				
	22				5 6.35 8	21.01	20.25	25	16				
	24					22.92	22.16	26	16				
	25					23.87	23.11		18				
	26	S3M060				24.83	24.07		18		皮带宽度10 S3M100 A:11 W:15		
	28	S3M100	A	D	5 6.35 8 9.5 12	26.74	25.98	30	20				
	30	S3M150				28.65	27.89	32	23				
	32					30.56	29.8	35	25		皮带宽度15 S3M150 A:17 W:21		
	34					32.47	31.71		28				
	36					34.38	33.62	40	28				
	40					38.2	37.44	44	32				
	44				6.35 8 9.5 12	42.02	41.25	48	36				
	48					45.84	45.07	50	38				

S5M型

型号	代码	齿数	带轮类型	带轮形状	轴孔规格	轴孔规格d _{H8}					V	带轮公称宽度	
						A形						A	W
EBD01	14					22.28	21.32	26	16	2.5	皮带宽度10 S5M100 A:7 W:16		
	15					23.87	22.91	28	18				
	16				5 6.35 8 9.5 12	25.46	24.5	32	20				
	18					28.65	27.69	33	22		皮带宽度15 S5M150 A:17 W:22		
	19					30.24	29.28		24				
	20					31.83	30.87		24				
	22	S5M100				35.01	34.05	40	27				
	24	S5M150	A	D	6.35 8 9.5 12	38.2	37.24	45	30				
	25	S5M250				39.79	38.83		30				
	26					41.38	40.42		35		皮带宽度25 S5M250 A:27 W:32		
	28					44.56	43.6	48	35				
	30					47.75	46.79	52	36				
	32				8 9.5 12	50.93	49.97	55	40				
	34					54.11	53.15		45				
	36					57.3	56.34	61	45				

S5M型

型号		带轮类型	带轮形状	轴孔规格	轴孔规格d _{H8}	
代码	齿数				A形	
EBD01	14	S5M100	A	D	5 6.35 8 9.5 12	
	15	S5M150				

EBD01-15-S5M100-A-D-d8

请按图示订货

未税价(元)

● 优惠价
数量 1~10 11~
价格 100% 另行报价

交货期
7