

代码	类型		材质	内径公差	外径公差
OFK01	直柱型	标准型	高力黄铜(SP2)	F7	m6
OFL01		薄壁型	镶嵌固体润滑剂		



特点


- 自润滑、免维护，适用于重载、低速运动；
- 耐磨性优异，适用于直线、旋转、摇摆运动；
- 耐高温、低温，抗冲击性强。

① 与本产品相配轴径公差：d8重载、e7轻载、g6高精度(仅供参考)；


② 产品压入座孔时在座孔端部或者内壁涂抹少许润滑油，利用油压机或台钳将其慢慢压入座孔，请勿用力敲击产品，以免引起产品变形。

A部(两端)放大图

标准型 OFK01



薄壁型 OFL01

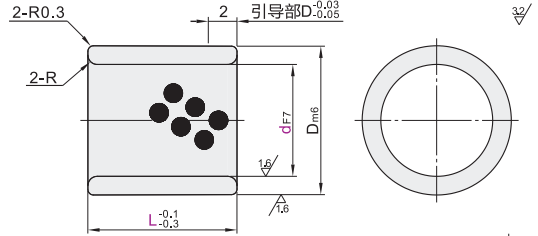

③ 与本产品相配固定座直径公差：H7(仅供参考)。

视角标准：第一视角

代码	型号		L																OFK01			OFL01		
	dF7																		Dm6	R	Dm6	R		
标准型 OFK01	5	+0.022	8	10	12	15	16	20	9	+0.015	7													
	6	+0.010	8	10	12	15	16	20	25	10	+0.006	8	+0.015											
	8	+0.028	8	10	12	15	16	20	25	30	12		10	+0.006										
	10	+0.013	8	10	12	15	16	20	25	30	35	14	+0.018	12	+0.007									
	12		8	10	12	15	16	20	25	30	35	40	18		15	+0.018								
	13		10	12	15	16	20	25	30	35	40	19		16	+0.007									
	15	+0.034	10	12	15	16	20	25	30	35	40	50	21		18									
	16	+0.016	10	12	15	16	20	25	30	35	40	50	22		20									
	18		10	12	15	16	20	25	30	35	40	50	24	+0.021	22	+0.021								
	20		10	12	15	16	20	25	30	35	40	50	60	70	28	+0.008	24	+0.008						
薄壁型 OFL01	20A	+0.041	10	12	15	16	20	25	30	35	40	50	60	70	30		2							
	25	+0.020	12	15	16	20	25	30	35	40	50	60	70	33		1.5	29	+0.021						
	25A		12	15	16	20	25	30	35	40	50	60	70	80	35		2							
	30		12	15	16	20	25	30	35	40	50	60	70	80	38	+0.025	1.5	34						
	35		16	20	25	30	35	40	50	60	70	80	44	+0.009	1.5	40	+0.025							
	40	+0.050	20	25	30	35	40	50	60	70	80	50		2	45	+0.009								
	50	+0.025	25	30	35	40	50	60	70	80	62		2.5	55	+0.011									
	60	+0.060	40	50	60	70	80	75																
	80	+0.030	50	60	70	80	96																	
	100	+0.071	70	80	100	120																		



请按图示订货

代码	型号	d	L
OFL01	d5	8	10
	d6	8	10

OFL01—d5—L10



未税价(元)

● 优惠价	数量	1~9	10~
	价格	100%	另行报价



交货期
7

