

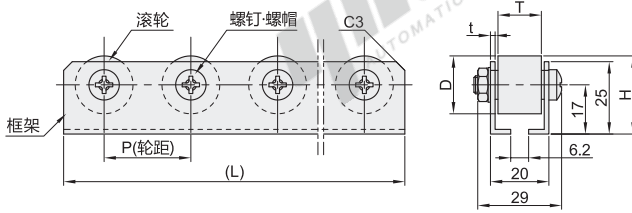


# 经济型滚轮条

## 滚轮宽度15

### 标准螺帽

代码	类型	轮距	支架	材质			表面处理	
				滚轮/轴承/螺钉螺帽	框架	支架	滚轮/螺钉螺帽	支架
E-QJB01	标准螺帽	25	无	钢	不锈钢	—	—	—
E-QJB11			有			—	—	铬酸盐 光泽处理
E-QJB31	标准螺帽	30	无	钢	不锈钢	—	—	—
E-QJB41			有			—	—	铬酸盐 光泽处理
E-QJB61	标准螺帽	35	无	钢	—	—	—	—
E-QJB71			有			—	—	铬酸盐 光泽处理

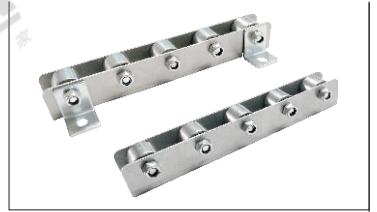

□ E-QJB11/41/71附带支架4个。

#### 轮距P=25

型号		L	H	D	T	t	耐负载 (单个滚轮)
代码	轮数量						
2	48						
3	73						
4	98						
5	123						
6	148						
7	173						
8	198						
9	223						
10	248						
11	273						
12	298						
13	323						
14	348						
15	373						
16	398						
17	423						
18	448						
19	473						
20	498						
21	523						
22	548						
23	573						
24	598						
25	623						
26	648						
27	673						
28	698						
29	723						
30	748						
31	773						
32	798						
33	823						

#### 轮距P=30

型号		L	H	D	T	t	耐负载 (单个滚轮)
代码	轮数量						
2	58						
3	88						
4	118						
5	148						
6	178						
7	208						
8	238						
9	268						
10	298						
11	328						
12	358						
13	388						
14	418						
15	448						
16	478						
17	508						
18	538						
19	568						
20	598						
21	628						
22	658						
23	688						
24	718						
25	748						
26	778						
27	808						
28	838						
29	868						
30	898						
31	928						
32	958						
33	988						

#### 轮距P=35

型号		L	H	D	T	t	耐负载 (单个滚轮)
代码	轮数量						
2	68						
3	103						
4	138						
5	173						
6	208						
7	243						
8	278						
9	313						
10	348						
11	383						
12	418						
13	453						
14	488						
15	523						
16	558						
17	593						
18	628						
19	663						
20	698						
21	733						
22	768						
23	803						
24	838						
25	873						
26	908						
27	943						
28	978						
29	1013						
30	1048						
31	1083						
32	1118						
33	1153						

滚轮

F5

代码	技术说明
KC	<p>变更框架倒角 由C3变更为C8</p> <p>选型方法 KC</p>

型号	代码	轮数量	可选加工
E-QJB01	3	3	KC
E-QJB01-2	3	3	KC


请按图示订货

● 优惠价  
数量 1~9 10~  
价格 100% 另行报价

未税价(元)

可交工期  
9

EX Example 使用示例

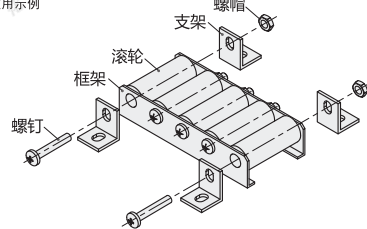

□ 支架安装方法：  
将需要安装支架处的螺钉、螺帽拆卸之后，将支架装入后，用螺钉、螺帽紧固即可。