



代码	类型		D公差	材质		硬度	表面处理
				国标	相当		
SAD11	直杆型	标准型	f8	45	S45C	—	镀硬铬, 镀层硬度HV750~ 镀层厚度3μm~
SAD14				0Cr18Ni9	SUS304		

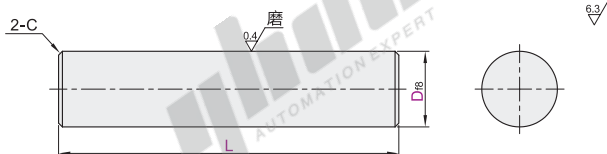

视角标准: 第一视角

① 圆度/直线度/垂直度/同轴度/硬度变化/铬层分布, 请参阅导向轴产品简介。

代码	型号		最小单位1	C
	D _{f8}	L		
(D公差f8) SAD11 SAD14	6	-0.010 -0.028	15~600	0.5以下
	8	-0.013 -0.035	15~800	
	10		15~800	
	12		15~1000	
	13		20~1000	
	15	-0.016 -0.043	20~1000	
	16		30~1200	1.0以下
	18*		25~1200	
	20		25~1200	
	25	-0.020 -0.053	25~1200	
	30		30~1500	
	35*		40~1500	
	40*	-0.025 -0.064	40~1500	
	50*		60~1500	

① 带*规格不适用SAD14。



可选加工

代码	技术说明																																				
LC	变更L尺寸公差	选型方法 LC ① 最小单位0.1 ② $L < 300$变更为$L_{\pm 0.03}$; $300 \leq L < 600$变更为$L_{\pm 0.05}$; $L \geq 600$变更为$L_{\pm 0.1}$																																			
EC()	增加1个平面	选型方法 EC10-K8 ① 最小单位1 <table><tr><th>D</th><th>h</th></tr><tr><td>3~5</td><td>0.5</td></tr><tr><td>6~18</td><td>1</td></tr><tr><td>20~40</td><td>2</td></tr><tr><td>50</td><td>3</td></tr></table>	D	h	3~5	0.5	6~18	1	20~40	2	50	3																									
	D	h																																			
3~5	0.5																																				
6~18	1																																				
20~40	2																																				
50	3																																				
ED()	增加2个平面	选型方法 ED10-K8-T20 ① 最小单位1 <table><tr><th>D</th><th>h</th></tr><tr><td>3~5</td><td>0.5</td></tr><tr><td>6~18</td><td>1</td></tr><tr><td>20~40</td><td>2</td></tr><tr><td>50</td><td>3</td></tr></table>	D	h	3~5	0.5	6~18	1	20~40	2	50	3																									
	D	h																																			
3~5	0.5																																				
6~18	1																																				
20~40	2																																				
50	3																																				
SC()	增加扳手槽	选型方法 SC5 ① 最小单位1 <table><tr><th>D</th><th>W</th><th>V</th></tr><tr><td>6</td><td>5</td><td rowspan="4">8</td></tr><tr><td>8</td><td>7</td></tr><tr><td>10</td><td>8</td></tr><tr><td>12</td><td>10</td></tr><tr><td>13</td><td>11</td><td rowspan="4">10</td></tr><tr><td>15</td><td>13</td></tr><tr><td>16</td><td>14</td></tr><tr><td>18</td><td>16</td></tr><tr><td>20</td><td>17</td><td rowspan="4">15</td></tr><tr><td>25</td><td>22</td></tr><tr><td>30</td><td>27</td></tr><tr><td>35</td><td>30</td></tr><tr><td>40</td><td>36</td><td rowspan="2">20</td></tr><tr><td>50</td><td>41</td></tr></table>	D	W	V	6	5	8	8	7	10	8	12	10	13	11	10	15	13	16	14	18	16	20	17	15	25	22	30	27	35	30	40	36	20	50	41
	D	W	V																																		
6	5	8																																			
8	7																																				
10	8																																				
12	10																																				
13	11	10																																			
15	13																																				
16	14																																				
18	16																																				
20	17	15																																			
25	22																																				
30	27																																				
35	30																																				
40	36	20																																			
50	41																																				

① 选择2个或以上可选加工时, 各加工部位间隔需2mm以上。

② 可选加工可能会使产品硬度降低。

☑ 可选加工



请按图示订货

型号	L	C
代码 D	15~800	0.5
SAD11	8	15~800
SAD14	8	15~800

SAD11—D6—L80

型号	L	可选加工代码
代码 D	15~800	LC EC()
SAD11	8	15~800 SC()
SAD14	8	15~800 JD()

SAD11—D6—L80—SC4



未税价(元)

● 优惠价

数量	1~9	10~
价格	100%	另行报价

交货期
3