
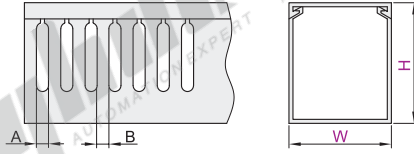



代码	类型	材质	颜色	阻燃等级	温度	
Y-SKA01	标准型	PVC方形线槽	环保硬质PVC	灰色	UL94V-0	-20°C~+70°C

特性:


- 反扣式槽盖与槽体设计合理, 组合后绝不脱落, 且接合面平滑, 不易割伤手及擦损配线;
- 配线槽70°C内不易断裂、变形、变色、装配省时便利;
- 出线孔低, 组合容易, 拆卸简单, 易于配线。



W<80mm线槽底部孔尺寸

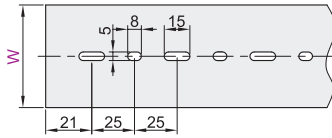

W≥80mm线槽底部孔尺寸

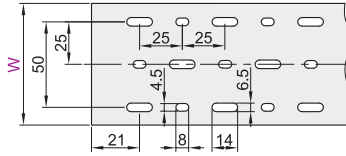

销售方式	每根长度
根	2米



型号					型号					型号									
代码	H	W	长度 (m)	A	B	代码	H	W	长度 (m)	A	B	代码	H	W	长度 (m)	A	B		
Y-SKA01	25	25	2	4	6	Y-SKA01	45	45	2	6	6	Y-SKA01	40	40	2	6	6		
	30	20					50	50					45	45					
	35	25					80	80					50	50					
	40	35					25	25					60	60					
	45	25	60	40			80	80					80	80				100	100
	40	40	80	60			60	60					60	120				120	
	60	25	25	33			40	40											
	45	33	45	45			50	50											
25	25	65	65	70	70														
45	45	80	25	80	80														
25	25	35	35	100	100														
35	35																		



型号		
代码	H	W
Y-SKA01	25	25
	30	25

Y-SKA01—H25—W25

拖线链槽