


胀铆螺母/平头条纹拉铆螺母

胀铆螺母

代码	类型	螺纹	材质		表面处理
			国标	相当	
TBC41	胀铆螺母	粗牙	碳钢		镀锌
TBC42			0Cr18Ni9	SUS304	—

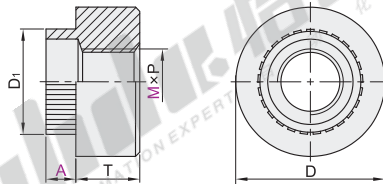

视角标准：第一视角

型号	M	A max	P 螺距	安装板 最小厚度	安装板孔径 +0.08	D	D1 max	T
(碳钢) TBC41	1	1.2		1				
	2	1.5		1.2				
	3	2	0.5	1.5	5	7	4.94	3
	2.5			2				
	3			2.5				
	4	1		3				
	1.2			1				
	1.5			1.2				
	2		0.7	1.5	6	8	5.98	4
	2.5			2				
	3			2.5				
	5	1		3				
(SUS304) TBC42	1	1.2		1				
	2	1.5		1.2				
	3	2	0.5	1.5	5	7	4.94	3
	2.5			2				
	3			2.5				
	4	1		3				
	1.2			1				
	1.5			1.2				
	2		0.7	1.5	6	8	5.98	4
	2.5			2				
	3			2.5				
	5	1		3				



请按图示订货

型号	M	A
代码	1	1
(碳钢) TBC41	3	1
(SUS304) TBC42	3	1

TBC41—M3—A1.2



未税价(元)

优惠价
数量 1~100 101~
价格 100% 另行报价



交货期




7



1、放置

2、铆接


3、配合螺钉使用




铆接头

平头条纹拉铆螺母

代码	类型	螺纹	材质	表面处理
TBY05	平头条纹拉铆螺母	粗牙	碳钢	镀锌
TBY06			不锈钢	—



铆接后



扫一扫 观看产品视频



视角标准：第一视角

型号	M	嘴位 编码	P 螺距	铆接范围 Max Min	A	安装孔径 ^{+0.1}	D	D1	K	L
(碳钢) TBY05	3	0	0.5	1.5 0.5		5	4.9	8		10
	4	0	0.7	2.0 0.5	6	6	5.9	9	0.8	10.5
	1			3.5 2.0						12
	5	0	0.8	2.5 0.5	7.5	7	6.9	10	1	13
	1			5.0 2.5	8.5					16.5
	0			3.0 0.5	9.2					15.5
	6	1	1.0	3.0L 0.5		9	8.9	13	1.3	19.5
	2			5.5 3.0	10.5					13
	3			5.5L 3.0						14.5
	0			3.5 1.0						16
	8	1	1.25	3.5L 1.0	11.5	11	10.9	14.5	1.5	18.5
	2			6.0 3.5						16
	3			6.0L 3.5						17
	0			4.0 1.0						19
	1			4.0L 1.0	13.5	13	12.9	19	1.7	21.5
	10	2	1.5	6.5 4.0						17
	3			6.5L 4.0						19
	4			3.5 1.0	11	12	11.9	16	1.6	19
	0			4.0 1.0	13.5	15	14.9	18	1.7	22
	12	1	1.75	6.5 4.0	14					25
	2			3.5 1.0	15					16
	3			6.0 3.5	16					22
										28



请按图示订货

型号	M	嘴位 编码
代码	1	0
(碳钢) TBY05	4	0
(不锈钢) TBY06	4	0

TBY06—M5—1



未税价(元)

优惠价
数量 1~99 100~
价格 100% 另行报价



交货期

7