
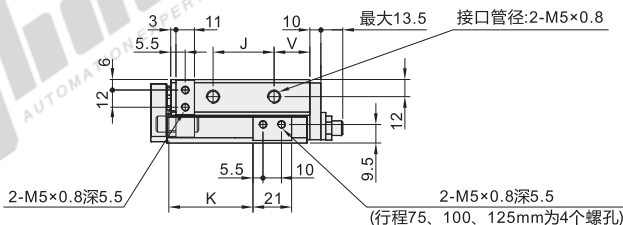
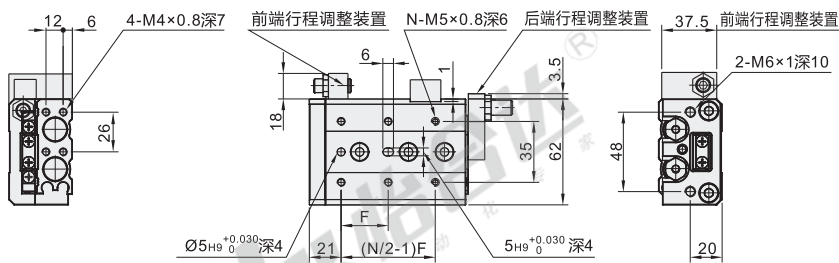





代码	类型	动作形式
<b>WHA03</b>	气动滑台	十字滚柱导轨 双作用



型号 代码	缸径	行程	磁性开关 数量	调整装置	缓冲	接管 螺纹	使用 流体	最高使用压力 MPa	最低使用压力 MPa	环境和流体 温度	活塞使用速度 mm/s	最高使用频率 (c.p.m)	行程调整 装置	给油
<b>WHA03</b>	16	10	0~2	N(无) AS(前端调程) AT(后端调程) A(两端调程) BS(前段液压缓冲器) BT(后端液压缓冲器) B(两端液压缓冲器)	橡胶 缓冲	M5	空气	0.7	0.15	-10~60°C	50~500	180	0~5	不需要
		20												
		30												
		40												
		50												
		75												
		100												
		125												

① 配套磁性开关WHS13-L2-2.

行程	F	N	G	H	NN	V	J	K	M	Z	ZZ
10								29			
20	35	4	16	40	2	10	40	39	76	75	87
30								49			
40	40			50			50	59	86	85	97
50	30		21	30	3	15	60	69	101	100	112
75	55	6	26		4	40	85	94	151	150	162
100	65		39	35	5	55	118	119	199	198	210
125	70	8	19		7	68	155	144	249	248	260



型号	缸径	行程	磁性开关 数量	调整装置
<b>WHA03</b>	16	10	0~2	N(无) AS(前端调程)

WHA03—16—10—2—N



优惠价	数量	价格
● 优惠价	1~19	100%
	20~	另行报价



交货期  
**9**