

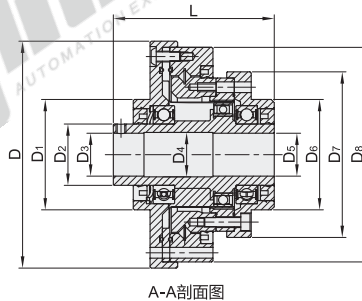


帽型谐波减速机

中空组合型 标准扭矩



代码	类型	结构形式
ZND06	标准扭矩	中空组合型

规格: 14/17




A-A剖面图

规格: 20/25/32/40/45/50/58/65

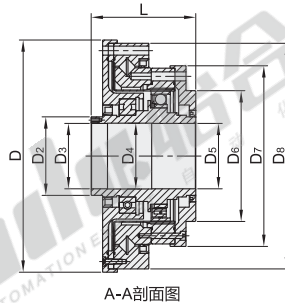

A-A剖面图



视角标准: 第一视角

型号	代码	规格	减速比	L	n	Ma深h	P1	p.c.d	A 安装螺钉	B 安装螺钉	N	P2	P.C.D	e	Mb深f	C	Dh7	D1h7	D2h7	D3h7	D4	D5h7	D6h7	D7	D8h7
ZND06	14	50 80 100		52.5	8	M3深5		44		2-M3	8		64				74	36	20	14	14.5	14	36	54	70
	17	50 80 100 120		56.5		M3深6	3.5	54	4-M3			3.5	74				84	45	25	19	19.5	19	45	64	80
	20			51.5				62		4-M3			84			25.5	95		30	21	21.5	21	50	75	90
	25			55.5	16	M4深8	4.5	77			12	4.5	102		M3深6	33.5	115		38	29	29.5	29	60	90	110
	32	50 80 100 120 160		65.5		M5深8	5.5	100	4-M4	4-M4		5.5	132			40.5	147		45	36	36.5	36	85	115	142
	40			79		M6深10	6.6	122	6-M5	6-M4		6.6	158			52	175		59	46	46.5	46	100	140	170
	45			85	12	M8深10		140	4-M4		18		180			58	195		64	52	52.5	52	120	160	190
	50			93	16	M8深11	9	154	8-M5	6-M5	12	9	200		M4深8	67	220		74	60	60.5	60	130	175	214
	58	80 100 120 160		106	12	M6深11		178	6-M6				226	8		77	246		84	70	70.5	70	150	201	240
	65			128	16	M10深15	11	195	8-M6	8-M6	16	11	258	6	M5深10	88	284		96	80	80.5	80	160	221	276



型号		减速比
代码	规格	
ZND06	14	50 80 100
	17	50 80 100 120

ZND06—14—50

帽型谐波减速机

标准扭矩系列性能参数表

规格	减速比	输入2000r/min时的额定转矩		启动停止时的容许峰值转矩		平均负载转矩的容许最大值		瞬间容许最大转矩		容许最高输入转速	容许平均输入转速
		N·m	kgf·m	N·m	kgf·m	N·m	kgf·m	N·m	kgf·m	r/min	r/min
14	50	5.7	0.58	19	1.9	7.2	0.74	36	3.7	8500	3500
	80	8.2	0.84	24	2.4	11.6	1.2	49	5		
	100	8.2	0.84	29	3	11.6	1.2	56	5.7		
17	50	17	1.7	35	3.6	27	2.8	73	7.4	7300	3500
	80	23	2.4	45	4.6	28	2.9	90	9.2		
	100	25	2.6	56	5.7	41	4.2	114	11.7		
	120	25	2.6	56	5.7	41	4.2	89	9.1		
20	50	26	2.7	58	5.9	36	3.6	102	10.4	6500	3500
	80	36	3.6	77	7.9	49	5	132	13		
	100	42	4.3	85	8.7	51	5.3	153	16		
	120	42	4.3	90	9.2	51	5.3	153	16		
	160	42	4.3	96	9.8	51	5.3	153	16		
25	50	41	4.2	102	10.4	58	5.9	193	20	5600	3500
	80	66	6.8	142	15	91	9.3	265	27		
	100	70	7.2	163	17	113	11.6	295	30		
	120	70	7.2	174	18	113	11.6	316	32		
	160	70	7.2	183	19	113	11.6	327	33		
32	50	80	8.1	225	23	113	11.6	397	41	4800	3500
	80	122	12	316	32	175	18	591	60		
	100	138	14	346	35	227	23	673	69		
	120	138	14	367	37	227	23	693	71		
	160	138	14	388	40	227	23	693	71		
40	50	138	14	406	41	198	20	693	71	4000	3000
	80	208	21	524	53	287	29	990	101		
	100	268	27	574	59	376	38	1091	111		
	120	297	30	623	64	456	46	1192	122		
	160	297	30	653	67	456	46	1192	122		
45	50	178	18	505	52	268	27	960	98	3800	3000
	80	316	32	713	73	394	40	1283	131		
	100	357	36	763	78	505	52	1586	162		
	120	406	41	831	85	626	64	1778	181		
	160	406	41	891	91	636	65	1929	197		
50	80	376	38	950	97	524	53	1879	192	3500	2500
	100	475	48	990	101	673	69	2081	212		
	120	534	55	1091	111	821	84	2081	212		
	160	534	55	1192	122	851	87	2475	253		
58	80	554	57	1495	153	778	79	2475	253	3000	2000
	100	703	72	1606	164	1071	109	3212	328		
	120	752	77	1737	177	1202	123	3363	343		
	160	752	77	1858	190	1222	125	3464	354		
65	80	752	77	2131	217	1050	107	3757	383	2500	1900
	100	961	98	2323	237	1535	157	4798	490		
	120	961	98	2535	259	1586	162	4798	490		
	160	961	98	2656	271	1586	162	4798	490		