

美标矩形弹簧


中载荷弹簧(红色)

代码	类型	材质	最大压缩量
YMSR	中载荷型	9254V	L×30%

□ L尺寸公差

L	公差
25~64	±3%
76~114	±2.5%
127~305	±2%

- ① 载荷(±10%)
- ① 直角度(3°以下)
- ① 负载(N)=弹簧常数(N/mm)×压缩量
- ① 理论使用次数: 30万次
- ① 弹簧颜色和圈数可能会因生产批次的不同有差异, 但产品性能均符合标准, 不影响使用!
- ① 参考标准NAAMS标准
- ① 弹簧外径公差: $-0.1^{+0.2}$, 内径公差: $0.1^{+0.2}$

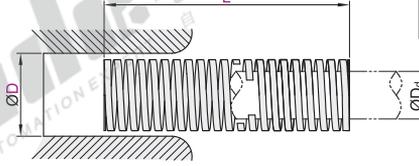

型号		轴径 D _d	弹簧常数 (N/mm)	使用方法	
代码	孔径D			长度L	30万次F=L×30% F(mm) 负载(N)
YMSR	9.53	4.76	14.7	7.6	112
			12.8	9.5	122
			11.7	11.4	134
			10.2	13.3	135
			8.8	15.2	133
			6.5	19.1	124
	12.7	7.14	5.3	22.9	120
			1.4	91.4	128
			27.1	7.6	207
			21.4	9.5	204
			17.2	11.4	196
			14.9	13.3	198
	15.88	8.73	13.1	15.2	200
			10.5	19.1	204
			8.9	22.9	204
			7	26.7	187
			1.9	91.4	176
			52.5	7.6	400
19.05	9.53	37.7	9.5	359	
		33.3	11.4	380	
		29.4	13.3	392	
		27.1	15.2	414	
		20.1	19.1	384	
		17.5	22.9	400	

型号		轴径 D _d	弹簧常数 (N/mm)	使用方法		
代码	孔径D			长度L	30万次F=L×30% F(mm) 负载(N)	
YMSR	19.05	9.53	26.1	22.9	596	
			22.4	26.7	598	
			19.3	30.5	587	
			17.5	34.3	600	
			15.8	38.1	600	
			14	41.9	587	
	25.4	12.7	152.4	13.1	45.7	600
			304.8	6.1	91.4	560
			144.8	7.6	1104	
			114.3	9.5	1089	
			94.2	11.4	1077	
			80.7	13.3	1076	
	31.75	15.88	70	15.2	1068	
			56.4	19.1	1074	
			46.8	22.9	1069	
			40.1	26.7	1070	
			35.4	30.5	1078	
			31.2	34.3	1069	

型号		轴径 D _d	弹簧常数 (N/mm)	使用方法		
代码	孔径D			长度L	30万次F=L×30% F(mm) 负载(N)	
YMSR	31.75	15.88	52.5	38.1	2002	
			46.2	41.9	1938	
			43.8	45.7	2002	
			36.8	53.3	1962	
			32.2	61	1964	
			25.4	76.2	1935	
	50.8	25.4	304.8	21.7	91.4	1986
			180.4	15.2	2749	
			142.2	19.1	2709	
			109.3	22.9	2498	
			94.6	26.7	2522	
			81.4	30.5	2482	
	50.8	25.4	114.3	71.8	34.3	2462
			127	64.4	38.1	2455
			139.7	57.8	41.9	2422
			152.4	51.7	45.7	2362
			177.8	44.7	53.3	2382
			203.2	38.5	61	2349



型号		
代码	D	L
YMSR	9.53	25.4
		31.75

YMSR—D9.53—L25.4



优惠价	
数量	1~9 10~
价格	100% 另行报价

交货期	
数量	12

氮气
弹簧

C4

