


卡扣式圆形连接器

两孔法兰插座 防水型 锌合金

代码	类型	连接方式	材质			表面处理	
			外壳	绝缘体	接触体	外壳	接触体
ZIX79	防水型 两孔 法兰插座	卡扣连接	锌合金	热塑塑料PPS (耐高温260°C)	铜	镀铬	镀金

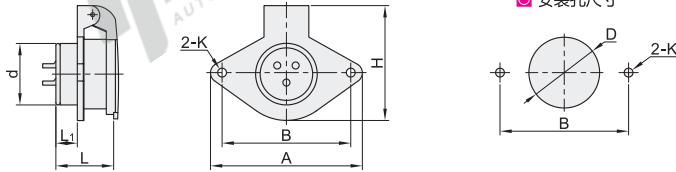

型号		规格	芯数	端头	d	L ₁	L	B	A	H	D	K	额定电流 (A)	工作电压 (V)	耐压 (V)	接触电阻 (MΩ)	绝缘电阻 (MΩ)	适配插头 代码
ZIX79	ZG (两孔法兰插座)	16	2	J(插针) K(插孔)	15.8	10	22	30	38	32.5	16.5	3.5	10	AC500	AC1500	2.5	2000	ZIX49
			3										5	AC400	AC1200	5		
			4															
			5										10	AC500	AC1500	5		
			6															
			7										10	AC500	AC1500	5		
			8															
			9										10	AC500	AC1500	5		
			10															
			11										10	AC500	AC1500	5		
			12															
			13										10	AC500	AC1500	5		
			14															
			15										10	AC500	AC1500	5		
			16															
			17										10	AC500	AC1500	5		
			18															
			19										10	AC500	AC1500	5		
			20															



请按图示订货

型号		规格	芯数	端头
代码	外形形状			
ZIX79	ZG	16	4	J(插针)
			5	K(插孔)

ZIX79-ZG-16-4-J

性能表

连接方式	卡扣连接
接线方式	焊接
接插次数	500次
温度范围	-40°C~+85°C
防护等级	IP67(盖板: IP44)