


# 带肩标准型 · P尺寸指定型

大头/小头锥角型

## 定位销

P尺寸指定型 圆型	公差等级	材质		硬度
		国标	相当	
YDP03	Dm6	9CrWMn	SKS3	淬火硬度58~61HRC
YDP04		0Cr18Ni9	SUS304	—

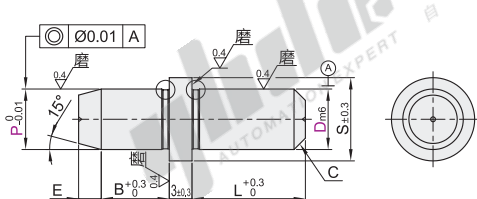

a=0.4(P≤2)  
a=0.8(P≥3)  
d=0.05(P≤2)  
d=0.1(P≥3)



视角标准：第一视角

型号		最小单位0.01		L	B	C	E	S
代码	Dm6	P						
YDP03 YDP04	2	+0.008 +0.002	1.00~2.00	4	2	0.5	0.5	6
	3		2.00~4.00	5	3			
	4		2.00~5.00	10	5	1	2	8
	5	+0.012 +0.004	3.00~6.00					
	6		4.00~7.00	15	6	1.5	3	11
	8	+0.015 +0.006	5.00~9.00					
	10		7.00~11.00	22	8	2	4	13
	12		7.00~12.00					
	13	+0.018 +0.007	8.00~13.00	30	10	3	5	15
	16		13.00~16.00					
20	+0.021 +0.008	16.00~20.00					16	
								19
								23



请按图示订货

型号		
代码	Dm6	P
YDP03	2	+0.008 1.00~2.00
YDP04	3	+0.002 2.00~4.00

YDP03—D3—P3

可选加工

型号			可选加工代码
代码	Dm6	P	
YDP03	2	+0.008 1.00~2.00	RC
YDP04	3	+0.002 2.00~4.00	RC

YDP03—D3—P3—EC2



未税价(元)

优惠价

数量	1~4	5~
价格	100%	另行报价




交货期

7



可选加工

代码	技术说明
RC	<p>变更颈部退刀槽为R0.5</p> <p>选型方法 RC</p> <p>① 不适用S-P &lt; 2</p>

代码	技术说明																												
EC()	<p>变更E尺寸</p> <p>选型方法 EC2</p> <p>① 最小单位1;</p> <p>② 圆锥小头直径1min;</p> <p>③ B尺寸因EC的变化而变化:</p>  <table border="1"> <thead> <tr> <th>D</th> <th>EC</th> <th>D</th> <th>EC</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>1</td> <td>8</td> <td>4~14</td> </tr> <tr> <td>3</td> <td>2~5</td> <td>10</td> <td>4~18</td> </tr> <tr> <td>4</td> <td>2~7</td> <td>12</td> <td>4~20</td> </tr> <tr> <td>5</td> <td>3~9</td> <td>13</td> <td>5~22</td> </tr> <tr> <td>6</td> <td>3~11</td> <td>16</td> <td></td> </tr> <tr> <td></td> <td></td> <td>20</td> <td>6~23</td> </tr> </tbody> </table>	D	EC	D	EC	2	1	8	4~14	3	2~5	10	4~18	4	2~7	12	4~20	5	3~9	13	5~22	6	3~11	16				20	6~23
D	EC	D	EC																										
2	1	8	4~14																										
3	2~5	10	4~18																										
4	2~7	12	4~20																										
5	3~9	13	5~22																										
6	3~11	16																											
		20	6~23																										

夹具用衬套

A6