



代码	类型	材质	表面处理
TCC14	重载荷	合金钢	烤漆(橙色)

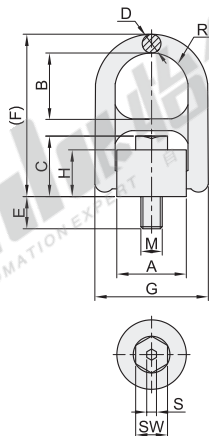

① 因烤漆工艺, 可能会导致产品吊装处部分区域未能烤漆。

型号		M	安全系数	A	B	C	D	E	(F)	G	H	R	S	SW	净重 (kg)	
TCC14	0.5T	8	4	33	35	30	20	12	85	56	23.5	17.5	6	13	0.3	
	0.7T	10						15								
	1T	12						20								
	1.5T	14						21								
	2T	16		24	130	85	36	27	8	18	1					
	2.5T	18		26	65	66	57	40	30	163	109	44	34.5	10	24	2
	3T	20		30												
	5T	24		36												
	5.6T	27		38												
	7.8T	30		48	219	150	62.5	45.5	12	30	5.5					
	9T	36		54	5.7											
	12.5T	36		10.6												
	15.6T	42		10.8												
	20T	48		11												

工作极限载荷

吊环 安装方式											
	1	2	1	2	2	2	2	3~4	3~4	3~4	
吊环数量	1	2	1	2	2	2	2	3~4	3~4	3~4	
起吊角度	0°	0°	90°	90°	0~45°	45~60°	不对称	0~45°	45~60°	不对称	
型号	规格	螺纹	工作极限载荷(吨)								
TCC14	0.5T	M8	0.8	1.6	0.5	1	0.7	0.5	1.05	0.75	0.5
	0.7T	M10	1.2	2.4	0.7	1.4	0.98	0.7	1.47	1.05	0.7
	1T	M12	2	4	1	2	1.4	1	2.1	1.5	1
	1.5T	M14	2.4	4.8	1.5	3	2.1	1.5	3.15	2.25	1.5
	2T	M16	3.2	6.4	2	4	2.8	2	4.2	3	2
	2.5T	M18	5	10	2.5	5	3.5	2.5	5.25	3.75	2.5
	3T	M20	5.6	11.2	3	6	4.2	3	6.3	4.5	3
	5T	M24	9.2	18.4	5	10	7	5	10.5	7.5	5
	5.6T	M27	9.5	19	5.6	11.2	7.84	5.6	11.76	8.4	5.6
	7.8T	M30	12	24	7.8	15.6	10.92	7.8	16.38	11.7	7.8
	9T	M36	12.5	25	8	16	11.2	8	16.8	12	8
	12.5T	M36	14	28	12.5	25	17.5	12.5	26.25	18.75	12.5
	15.6T	M42	16	32	15.6	31.2	21.84	15.6	32.76	23.4	15.6
	20T	M48	20	40	20	40	28	20	42	30	20



型号	规格
TCC14	0.5T
	0.7T
TCC14-0.5T	



优惠价	数量	1~9	10~
	价格	100%	另行报价



交货期	7
-----	---