



代码	类型		适配电机
ZJU42	斜齿	双段	伺服电机/步进电机




无键槽
法兰尺寸: 42~115

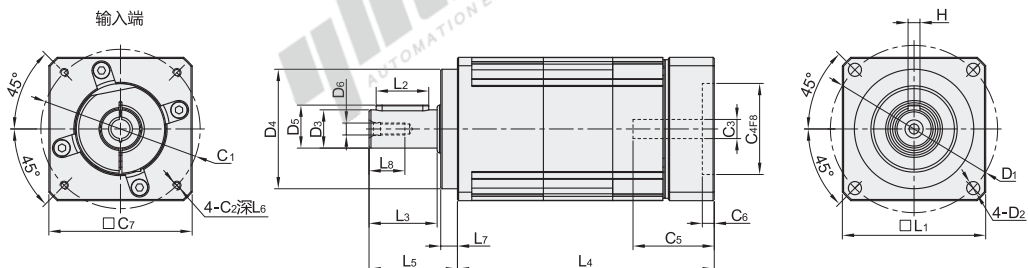

带键槽
法兰尺寸: 42~115

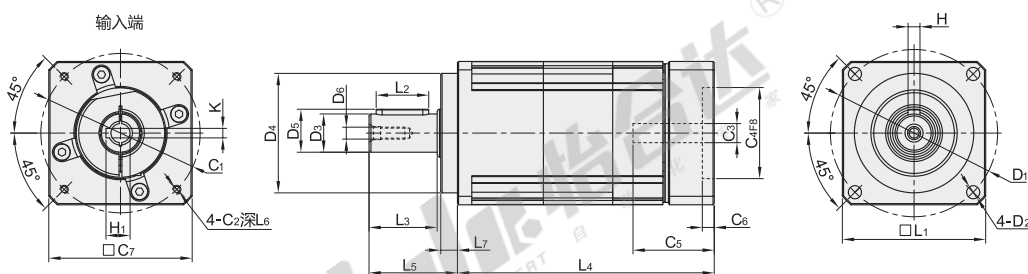

带键槽
法兰尺寸: 142~220

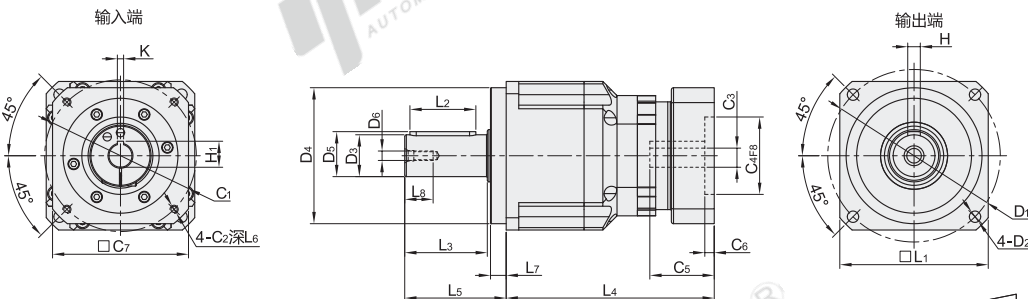

视角标准: 第一视角

型号		段数	减速比	背隙	安装尺寸代号	键槽宽度K	适配电机功率
代码	法兰尺寸						
ZJU42	42	2 (双段)	20 25 35 40 50 70 100	P1 (精密背隙) P2 (标准背隙)	T1 T2 T3	无指定(无键槽)	100W伺服/42步进
	60				T1 T2 T3 T4	无指定(无键槽) 5	200W/400W伺服/57步进
	90				T1 T2 T3	无指定(无键槽) 5 6	750W伺服/86步进
	115		15 20 25 30 35 40 50 70 100		T1 T2 T3 T4	无指定(无键槽) 6 8	1/1.5KW伺服/110/130步进
	142					8 10 12	1/1.5KW/2KW/3KW伺服
	180				T1 T2 T3	10 12	3KW/4KW/5KW伺服
	220					12 16	4KW/5KW伺服

尺寸表

法兰尺寸	安装尺寸代号	电机连接板尺寸						D ₁	D ₂	D ₃	D ₄	D ₅	D ₆	H	H ₁	K	L ₁	L ₂	L ₃	L ₄	L ₅	L ₆	L ₇	L ₈			
		C ₁	C ₂	C ₃	C ₄	C ₅	C ₆																		C ₇		
42	T1	43.8	3.5	5	22																		4				
	T2	45	M3		30	28	3.5	42.6	50	3.5	13	35	18	M4	5	—	—	42.6	16	19.5	80	26	7	5.5	12		
	T3	46	M4	8																			8				
60	T1	66.7		8	38.1																						
	T2		M4	11		34	5	60	70	5.5	16	50	18	M5	5			60	22	28.5	107.5	37	10	7	15		
	T3	70			50																						
	T4		M5	14											K5	16.3							12				
90	T1	98.4		14	73		6	86									K5	16.3									
	T2		M5	19	70	42		6.5	80	100	7	22	80	24.5	M8	6		K6	21.8	90	28	36.5	140	45	15	7	19
	T3	90		M6														K6	21.8								
115	T1	115		19	95			115										K6	21.8								
	T2	145	M8	22	110	64	10	130	130	9	32	110	35	M12	10			K8	25.3	115	40	51	185.5	61	20	8	28
	T3	115			95			115										K8	27.3								
	T4	145		24	110			130																			
142	T1	145	M8	22	110	65	10											K8	25.3	130		199		20			
	T2							142	165	11	40	130	43	M16	12			K10	38.3		63	79	215	97	30	15	38
	T3	200		35	114.3	81.5	8											K12	45.3	142							
180	T1	215		42	180			190										K12	45.3								
	T2		M12	42	114.3	81.5	8	180	215	13	55	160	59	M20	16			K12	45.3	180	70	82	228	105	30	20	44
	T3	200		35														K10	38.3								
220	T1	235		55	200	118												K16	59.3			301.5					
	T2			42	114.3	86	10	220	250	17	75	180	79.5	M20	20			K12	45.3	220	90	105	269.5	138	30	30	42
	T3	215			180																						

① C₁~C₇尺寸是公制标准电机连接板尺寸，请依据所用的电机决定相应代号。

② 法兰端尺寸如有任何差异请联系工程（可根据电机尺寸进行来图定制）。

减速性能表

规格	单位	段数	减速比	法兰尺寸						
				42	60	90	115	142	180	220
额定输出扭矩T _N	N·m	1	3	—	53	145	290	500	950	1550
			4	19	55	150	300	540	1050	1650
			5	17	54	140	290	650	1200	1700
			7	14	44	125	270	555	1150	1500
			10	11	37	95	220	460	910	1250
			15	—	53	145	290	500	950	1550
		2	20	19	55	150	300	540	1050	1650
			25	17	54	140	290	650	1200	1700
			30	—	54	140	290	500	950	1700
			35		54	140	290	650	1200	1700
			40	17	55	150	300	540	1050	1650
			50		54	140	290	650	1200	1700
			70		44	125	270	555	1150	1500
			100	11	37	95	220	460	910	1250
最大输出力矩T _{2N}	N·m	1、2	3~100	2倍额定扭矩输出						
满载效率	%	1	3~10	97%				95%		
		2	15~100	94%				92%		
平均使用寿命	h	1、2	3~100	20000						
工作温度	℃	1、2	3~100	-10℃~90℃						
防护等级	—	1、2	3~100	IP65						
安装方向	—	1、2	3~100	任意方向						
精密背隙P ₁	arcmin	1	3~10	≤5	≤4	≤4	≤3	≤3	≤3	≤3
		2	12~100		≤6	≤6	≤5	≤5	≤5	≤5
标准背隙P ₂	arcmin	1	3~10	≤7	≤6	≤6	≤5	≤5	≤5	≤5
		2	15~100		≤8	≤8	≤7	≤7	≤7	≤7
额定输入转速n _{1N}	rpm	1、2	3~100	4000	5000	4000	4000	3000	3000	2000
最大容许径向力F _{2rb}	N	1、2	3~100	510	1010	1780	3420	9400	14500	11120
最大容许轴向力F _{2ab}	N	1、2	3~100	410	600	1500	2650	4700	6200	8560
噪音值	dB	1、2	3~100	58	58	60	63	65	67	70



请按图示订货

型号	段数	减速比	背隙	安装尺寸代号
代码 法兰尺寸				
ZJU42 60	2	15 20 25	P1	T1 T2 T3 T4
90			P2	T1 T2 T3

ZJU42-60-2-15-P2-T1