


# 线槽


## PVC方形线槽 标准型

代码	类型	销售方式	材质	颜色	阻燃等级	温度
ZIK10	标准型	PVC方形线槽	米	环保硬质PVC	灰色	UL94V-0 -20°C~+70°C


特性：开口齿槽，反扣式槽盖与槽体设计组合后绝不脱落，且接合面平滑，不割伤手及擦损附近配线。

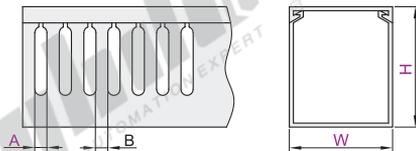

W ≤ 60mm 线槽底部孔尺寸



W ≥ 80mm 线槽底部孔尺寸



型号		W	A	B	销售方式：米	
代码	H				起订数	仅ZIK10
ZIK10	20	20				
		25				
	25	20				
		25				
		30				
	30	30				
		35				
		40				
		25				
	35	30				
		35				
		50				
	40	25		若A尺寸为4, B尺寸则为6		
		30				
		40		若A尺寸为6, B尺寸则为7		
		60	4			
		25	6		按2的倍数起订	
	45	33	8	若A尺寸为8, B尺寸则为10		
		45				
		25		若有区别请以实物尺寸为准。		
50	30					
	35					
	40					
	45					
	50					
	55					
	60					
60	25					
	30					
	35					
	40					

型号		W	A	B	销售方式：米	
代码	H				起订数	仅ZIK10
ZIK10	60	45				
		50				
		60				
		80				
		100				
	65	120				
		25		若A尺寸为4, B尺寸则为6		
		33				
		35		若A尺寸为6, B尺寸则为7		
		45	4			
	80	65	6			
		25	8	若A尺寸为8, B尺寸则为10		
		30				
		35				
	100	40		若有区别请以实物尺寸为准。		按2的倍数起订
		45				
		50				
		55				
		60				
		80				
100						
100	10	10				
	60					
	80					
	100					



型号			
代码	H	W	A
ZIK10	40	40	4
	50	25	6

ZIK10-H40-W40-A4