



代码	类型	材质		最大压缩量
		国标	相当	
YSWY	超大压缩量	60Si2CrA	SWOSC-V	L×65%

□ L尺寸公差

L	公差
50以下	±0.5
50以上	±1.5%

- ① 载荷(±10%)
- ② 直角度(3°以下)
- ③ 载荷(N)=定数(N/mm)×压缩量
- ④ 使用次数: 100万次(L×70%为30万次)
- ⑤ 耐热温度为150°C
- ⑥ 1kgf=9.81N
- ⑦ 压紧长度为参考值, 制作时会
有少许差异。
- ⑧ 弹簧颜色和圈数可能会因生产
批次不同而异, 但产品性能均
符合标准, 不影响使用!

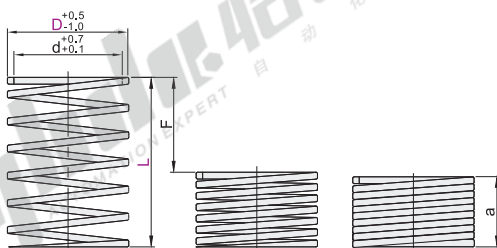

型号	内径	弹簧常数	a	使用方法			
				F=L×65%	Fmm 负载N		
代码 D L	d	N/mm	压紧长度	Fmm	负载N		
YSWY	11	7	29.4	20	2.26	5	13.0
				25	1.81	6.3	16.3
				30	1.51	7.5	19.5
				35	1.29	8.8	22.8
				40	1.13	10	26.0
				45	1.01	11.3	29.3
				50	0.91	12.5	32.5
				55	0.82	13.8	35.8
				60	0.75	15	39.0
				65	0.70	16.3	42.3
YSWY	12.5	8.5	40.2	20	3.08	5	13.0
				25	2.46	6.25	16.3
				30	2.06	7.5	19.5
				35	1.76	8.75	22.8
				40	1.54	10	26.0
				45	1.37	11.25	29.3
				50	1.23	12.5	32.5
				55	1.12	13.75	35.8
				60	1.03	15	39.0
				65	0.95	16.25	42.3
YSWY	16.5	10.5	91.1	20	7.02	5.0	13.0
				25	5.6	6.25	16.3
				30	4.7	7.5	19.5
				35	4.02	8.75	22.8
				40	3.53	10	26.0
				45	3.14	11.25	29.3
				50	2.84	12.5	32.5
				55	2.55	13.75	35.8
				60	2.35	15	39.0
				65	2.16	16.25	42.3
YSWY	20.5	13.5	109.3	20	5.98	5	13.0
				25	4.79	6.25	16.3
				30	3.98	7.5	19.5
				35	3.32	8.75	22.8
				40	2.82	10	26.0
				45	2.47	11.25	29.3
				50	2.16	12.5	32.5
				55	1.91	13.75	35.8
				60	1.70	15	39.0
				65	1.53	16.25	42.3

型号	内径	弹簧常数	a	使用方法			
				F=L×65%	Fmm 负载N		
代码 D L	d	N/mm	压紧长度	Fmm	负载N		
YSWY	24.5	16.5	136.6	20	2.84	15	39.0
				25	2.55	16.25	42.3
				30	2.35	17.5	45.5
				35	2.26	18.75	48.8
				40	2.06	20	52.0
				45	1.86	22.5	58.5
				50	1.67	25	65.0
				55	1.57	27.5	71.5
				60	1.37	30	78.0
				65	1.34	31.25	81.3
YSWY	30	21	200.3	20	1.24	32.5	84.5
				25	1.18	35	91.0
				30	1.08	37.5	97.5
				35	0.98	40	104.0
				40	0.87	42.5	110.5
				45	0.77	45	117.0
				50	0.67	47.5	123.5
				55	0.59	50	130.0
				60	0.51	52.5	136.6
				65	0.44	55	143.1

型号	内径	弹簧常数	a	使用方法			
				F=L×65%	Fmm 负载N		
代码 D L	d	N/mm	压紧长度	Fmm	负载N		
YSWY	37	26	294.2	20	11.32	10	26.0
				25	10.06	11.3	29.3
				30	9.05	12.5	32.5
				35	8.23	13.8	35.8
				40	7.54	15	39.0
				45	6.96	16.3	42.3
				50	6.47	17.5	45.5
				55	6.03	18.8	48.8
				60	5.66	20	52.0
				65	5.30	22.5	58.5
YSWY	42	31	392.3	20	4.53	25	65.0
				25	4.11	27.5	71.5
				30	3.77	30	78.0
				35	3.48	32.5	84.5
				40	3.23	35	91.0
				45	3.02	37.5	97.5
				50	2.83	40	104.0
				55	2.66	42.5	110.5
				60	2.51	45	117.0
				65	2.38	47.5	123.5



型号		L	内径
代码	D		
YSWY	YSWY-D11-L20	25	7
		30	

● 优惠价	数量 1~9	10~
	价格 100% 另行报价	

交货期
3