


代码	材质	表面处理
ATY05-F	A6063-T5	喷砂氧化


- ① 最大使用长度：5800~5850mm；
整条标准长度：6000~6020mm。
② 可定制表面处理。

■ L长度公差

$L \leq 1000\text{mm}$



(当 $L > 1000\text{mm}$ 时，长度尺寸公差 ± 0.5)






ATY05-F-2030AB
ATY05-F-2040AB
ATY05-F-3030AB
ATY05-F-3060AB
ATY05-F-4040AB
ATY05-F-4080AB

ATY05-F-6060AB
ATY05-F-6080AB
ATY05-F-8080AB

ATY05-F-3030CD
ATY05-F-3060CD
ATY05-F-4040CD
ATY05-F-4080CD



ATY05-F-6030CD
ATY05-F-6060CD
ATY05-F-8040CD
ATY05-F-5050CD

ATY05-F-3060GD
ATY05-F-4060GD
ATY05-F-4080GD
ATY05-F-5050GD
ATY05-F-50100GD





ATY05-F-8080CD
ATY05-F-50100CD

ATY05-F-100100CD

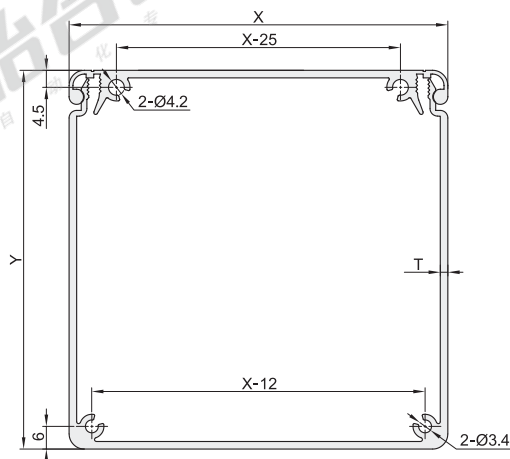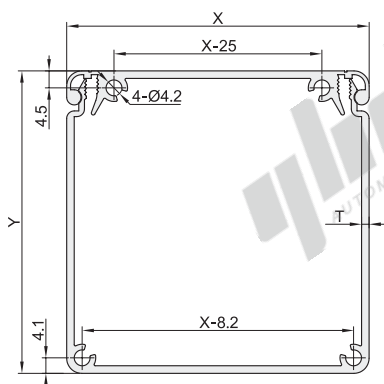


ATY05-F-80160CD

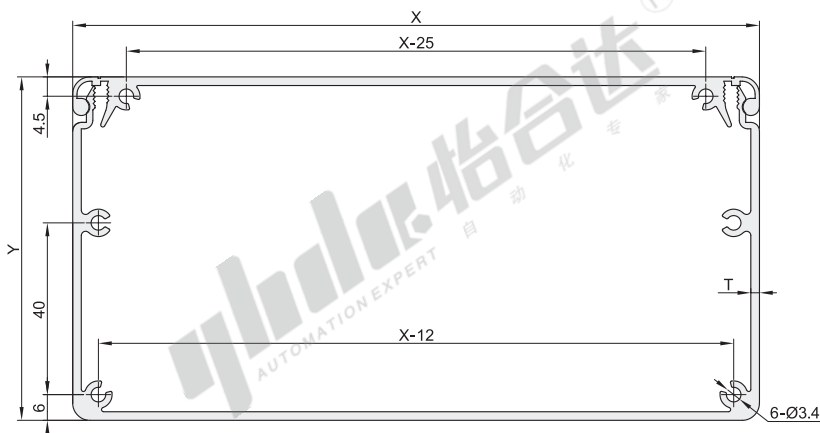


视角标准：第一视角


40系列
ATY05-F-40A




ATY05-F-40C




ATY05-F-40D




80系列
ATY05-F-80A




ATY05-F-80C




ATY05-F-80D




120系列
ATY05-F-120A




ATY05-F-120C




ATY05-F-120D




160系列
ATY05-F-160A




ATY05-F-160C




ATY05-F-160D




槽口详图



线槽型材组合示意图

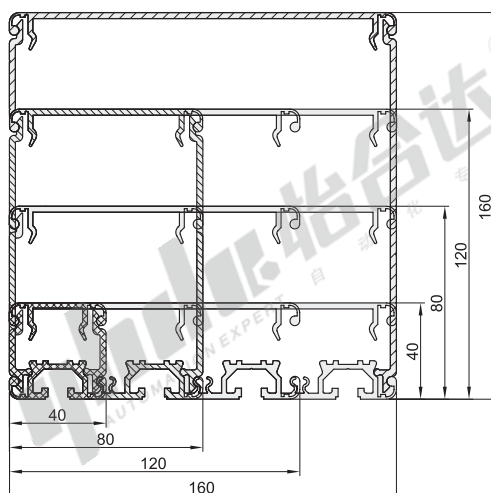


线槽型材组装图

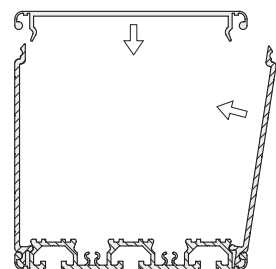

通用铝合金型材

线槽型材

组合线槽示意图

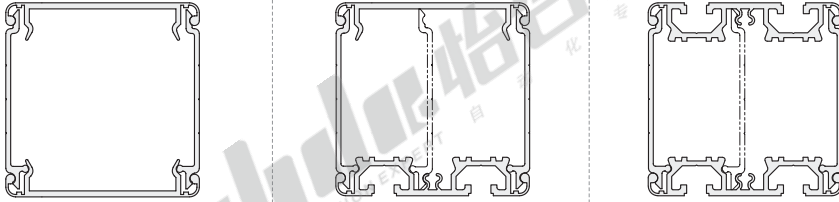

因为支撑型材和壁板型材外部尺寸相同，所以可以选择型材相应位置构建不同线槽，用来满足客户的需求。

视角标准：第一视角

型号		L	Y	X	T	每米重量Kg/m	截面积
代码	规格	最小单位0.5				(理论值)	(mm²)
ATY05-F	2030AB		20	30	1	0.40	144.81
	2040AB			40		0.45	163.85
	3030AB		30	30		0.45	163.29
	3060AB			60		0.62	223.21
	4040AB		40	40		0.56	203.85
	4080AB			80	1.3	0.78	283.21
	6060AB		60	60		0.92	332.32
	6080AB			80		1.04	378.22
	8080AB		80	80		1.19	430.22
	3030CD		30	30	2	0.73	263.66
	3060CD			60		1.06	383.66
	4040CD		40	40		0.95	343.66
	4080CD			80		1.39	504.66
	6030CD		60	30		1.06	383.65
	6060CD			60		1.39	503.66
	8040CD		80	40	1.5	1.39	503.65
	8080CD			80		1.96	711.24
	5050CD		50	50		1.17	423.66
	50100CD	50~6000		100		1.85	671.24
	100100CD		100	100		2.50	907.08
	80160CD		80	160	2.5	3.07	1116.36
	3060GD		30	60		0.91	331.44
	4060GD			60		1.04	376.44
	4080GD		40	80		1.21	439.38
	5050GD			50		1.09	395.23
	50100GD		50	100	2	1.50	545.22
	40A		34	—		0.21	75.27
	40C		—	40		0.35	127.25
	40D		—	—		0.58	211.20
	80A		74	—		0.47	171.41
	80C		—	80	2.5	0.64	231.86
	80D		—	—	2	1.18	426.27
	120A		114	—	2.5	0.83	300.23
	120C		—	120	2	1.00	362.16
	120D		—	—	2	1.77	641.35
	160A		154	—	2.5	1.10	400.08
	160C		—	160	2	1.27	462.16
	160D		—	—		2.36	856.42



请按图示订货

型号		L
代码	规格	最小单位0.5
ATY05-F	3030AB	50~6000
	4040CD	

ATY05-F — 3030AB — L800