



内六角沉头螺钉

代码	类型	螺纹	材质		强度等级
			国标	相当	
Y-JAA25	内六角沉头螺钉	粗牙	0Cr18Ni9	SUS304	A2-70
Y-JAA27			0Cr17Ni12Mo2	SUS316	A4-70

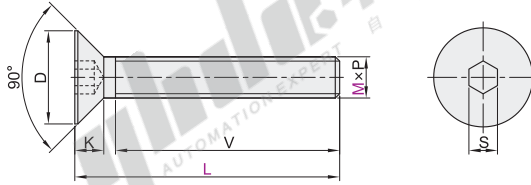

适用标准：DIN 7991-1986



- 内六角沉头螺钉大多用在需要安装后，零件的表面不能有凹起的地方；
- 常用于机械上，主要有便于紧固，拆卸，不容易滑角等优势。

SUS304

型号		L								V	P 螺距	D (min)	D (max)	K (max)	S				
代码	M	6	8	10	12	16	20	25	30							35			
Y-JAA25	3	6	8	10	12	16	20	25	30	35	全牙	0.5	5.7	6	1.7	2			
	4	6	8	10	12	16	18	20	25	30		35	0.7	7.64	8	2.3	2.5		
	5	8	10	12	14	16	20	25	30	35		40	0.8	9.64	10	2.8	3		
	6	8	10	12	14	16	20	25	30	35		40	45	1	11.57	12	3.3	4	
	8	10	12	14	15	16	20	25	30	35		40	45	50	1.25	15.57	16	4.4	5
	10	16	20	25	30	35	40	45	50	55		60	65	70	1.5	19.48	20	5.5	6

SUS316

型号		L								V	P 螺距	D (min)	D (max)	K (max)	S		
代码	M	6	8	10	12	16	20	25	30							35	
Y-JAA27	3	6	8	10	12	16	20	25	30		全牙	0.5	5.7	6	1.7	2	
	4	6	8	10	12	16	20	25	30	35		0.7	7.64	8	2.3	2.5	
	5	8	10	12	14	16	20	25	30	35		40	0.8	9.64	10	2.8	3
	6	10	12	14	16	20	25	30	35	40		45	1	11.57	12	3.3	4
	8	16	20	25	30	35	40	45	50				1.25	15.57	16	4.4	5
	10	16	20	25	30	35	40	45	50				1.5	19.48	20	5.5	6

SUS304

型号		L							
代码	M	6	8	10	12	16	20	25	30
Y-JAA25	3	6	8	10	12	16			
	4	6	8	10	12	16			
	5	8	10	12	14	16			

Y-JAA25-M4-L16



● 优惠价	数量	1~49	50~
	价格	100%	另行报价

