




帽型谐波减速机




凸轮组合型 标准扭矩

代码	类型	结构形式
ZND08	标准扭矩	凸轮组合型




规格: 14



规格: 17



规格: 20/25/32/40/45/50/58/65

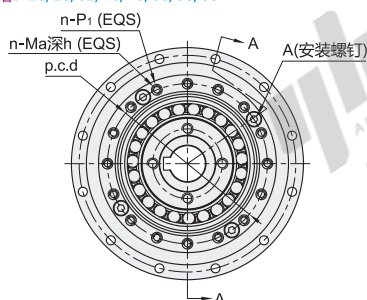

视角标准: 第一视角

型号	减速比		L _{0-0.4}	n	Ma深h	P ₁	A 安装螺钉	p.c.d	B 安装螺钉	N	P ₂	P.C.D	Mb	C			
ZND08	14	50 80 100	28.5	8	M3深5	3.5	4-M3	44	2-M3	8	3.5	64	M3	18			
	17	50 80 100 120	32.5		M3深6			54		74		M4	22				
	20		33.5		M4深8			62	4-M3	84			27				
	25		37	16	M5深8			77		102		M5	32				
	32	50 80 100 120 160	44		M5深8	5.5	4-M4	100	4-M4		5.5	132		42			
	40		55		M6深10	6.6	4-M5	122	6-M4		6.6	158	M4	50			
	45		59	12	M8深10	9	4-M5	140		18	6.6	180		52			
	50		67	16	M8深11		8-M5	154	6-M5	12	9	200	M5	60			
	58	80 100 120 160	80.5	12	M10深15	11	6-M6	178	8-M5		9	226		70			
	65		86.5	16			8-M6	195	8-M6	16	11	258	M6	80			
规格	Mc深f	E	T	WJS9	D _{n7}	D _{1H7}	D ₂	D ₃	D _{4H7}	D ₅	D ₆	D _{7H6}	G ₁	G ₂			
14	—	—	9.4	3	±0.013	70	48	31	14	8	14	38	50	54×1.5	38×0.6		
17	M2.5深5	12				5	±0.015	80	60	38	16	8	16	45	60	64×1.5	47×1
20		18						90	70	45	22	14	22	53	70	73×2	54×1
25		18						110	88	56	24	14	24	66	85	90×1.8	67×1.5
32	M3深6	26	21.8	6	±0.015	142	114	73	35	19	35	86	110	118×2	88×1.5		
40		32				170	140	90	40	19	40	106	135	143×2	107.67×1.78		
45		32				190	158	101	40	19	40	119	155	165.2×2.4	123×1.8		
50		32				214	175	113	40	19	40	133	170	183×2	135×2		
58	M5深10	42	27.3	8	±0.021	240	203	131	50	24	50	154	195	208×2	158×1.78		
65		42				276	232	150	50	24	50	172	215	235.2×1.8	175.2×1.8		



型号	规格	减速比
ZND08	14	50 80 100
	17	50 80 100 120

请按图示订货

ZND08—14—50

帽型谐波减速机

标准扭矩系列性能参数表

规格	减速比	输入2000r/min 时的额定转矩		启动停止时的 容许峰值转矩		平均负载转矩 的容许最大值		瞬间容许 最大转矩		容许最高 输入转速	容许平均 输入转速
		N·m	kgf·m	N·m	kgf·m	N·m	kgf·m	N·m	kgf·m	r/min	r/min
14	50	5.7	0.58	19	1.9	7.2	0.74	36	3.7	8500	3500
	80	8.2	0.84	24	2.4	11.6	1.2	49	5		
	100	8.2	0.84	29	3	11.6	1.2	56	5.7		
17	50	17	1.7	35	3.6	27	2.8	73	7.4	7300	3500
	80	23	2.4	45	4.6	28	2.9	90	9.2		
	100	25	2.6	56	5.7	41	4.2	114	11.7		
	120	25	2.6	56	5.7	41	4.2	89	9.1		
20	50	26	2.7	58	5.9	36	3.6	102	10.4	6500	3500
	80	36	3.6	77	7.9	49	5	132	13		
	100	42	4.3	85	8.7	51	5.3	153	16		
	120	42	4.3	90	9.2	51	5.3	153	16		
25	160	42	4.3	96	9.8	51	5.3	153	16	5600	3500
	50	41	4.2	102	10.4	58	5.9	193	20		
	80	66	6.8	142	15	91	9.3	265	27		
	100	70	7.2	163	17	113	11.6	295	30		
32	120	70	7.2	174	18	113	11.6	316	32	4800	3500
	160	70	7.2	183	19	113	11.6	327	33		
	50	80	8.1	225	23	113	11.6	397	41		
	80	122	12	316	32	175	18	591	60		
40	100	138	14	346	35	227	23	673	69	4000	3000
	120	138	14	367	37	227	23	693	71		
	160	138	14	388	40	227	23	693	71		
	50	138	14	406	41	198	20	693	71		
45	80	208	21	524	53	287	29	990	101	3800	3000
	100	268	27	574	59	376	38	1091	111		
	120	297	30	623	64	456	46	1192	122		
	160	297	30	653	67	456	46	1192	122		
50	50	178	18	505	52	268	27	960	98	3500	2500
	80	316	32	713	73	394	40	1283	131		
	100	357	36	763	78	505	52	1586	162		
	120	406	41	831	85	626	64	1778	181		
58	160	406	41	891	91	636	65	1929	197	3000	2000
	80	376	38	950	97	524	53	1879	192		
	100	475	48	990	101	673	69	2081	212		
	120	534	55	1091	111	821	84	2081	212		
65	160	534	55	1192	122	851	87	2475	253	2500	1900
	80	554	57	1495	153	778	79	2475	253		
	100	703	72	1606	164	1071	109	3212	328		
	120	752	77	1737	177	1202	123	3363	343		
	160	752	77	1858	190	1222	125	3464	354		
	80	752	77	2131	217	1050	107	3757	383		
	100	961	98	2323	237	1535	157	4798	490		
	120	961	98	2535	259	1586	162	4798	490		
	160	961	98	2656	271	1586	162	4798	490		