

带法兰无油衬套组件

中间法兰型 内置铜合金衬套



代码	类型	固定座		衬套	密封圈
		材质	表面处理	材质	
Y-GSD14	圆法兰型	SS400	无电解镀镍	高力黄铜(SP2) 镶嵌固体润滑剂	有
Y-GSD15	方法兰型				
Y-GSD16	对边法兰型				




圆法兰型
Y-GSD14

方法兰型
Y-GSD15


对边法兰型
Y-GSD16

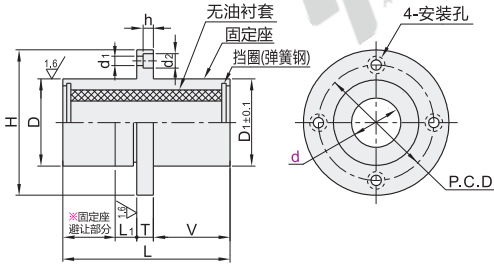

d=6~13



d=16~30



※固定座避让部分外径公差

D ≤ 28时为 $-\frac{0.1}{0.3}$
D ≥ 32时为 $-\frac{0.3}{0.5}$

视角标准：第一视角

型号		D	D ₁	L	L ₁	V	H	T	d ₁	d ₂	h	P.C.D	W	W ₁	E	F		
圆法兰型 Y-GSD14	6	$^{+0.022}_0$	12	$^0_{-0.016}$	11.8	37	16	28	5	3.3	6	3.3	20	22	18	20		
	8	$^{+0.028}_0$	15		14.8	47	6	21	32			24	25	21		24		
	10	$^{+0.028}_0$	19		18.8				40			29	30	25	—	29		
方法兰型 Y-GSD15	12	$^{+0.034}_0$	21	$^0_{-0.021}$	20.8	57		25.5	42	6	4.3	7.5	4.3	32	32	27	32	
	13	$^{+0.034}_0$	23		22.8				43			33	34	29		33		
	16	$^{+0.034}_0$	28		27.8	67	11	30.5	48			38	37	34	22	31		
对边法兰型 Y-GSD16	20	$^{+0.041}_0$	32		31.6	77		34.5	54			43	42	38	24	36		
	25	$^{+0.041}_0$	40	$^0_{-0.025}$	39.6	108		50	62	8	5.3	9	5.3	51	50	46	32	40
	30	$^{+0.041}_0$	45		44.6	128		59	74	10	6.3	11	6.3	60	58	51	35	49



型号		D
代码	d	12
Y-GSD14	6	
	8	
	10	
Y-GSD14-d8	8	



● 优惠价

数量	1~4	5~
价格	100%	另行报价

