


欧标60槽宽10.2系列铝合金型材

槽口壁厚4.5



代码	材质	表面处理
AOB02	A6063-T6	碱砂氧化
AOB05	A6063-T5	喷砂氧化

- ① 切断面未进行氧化处理。
- ② 最大使用长度：5800~5850mm；
整条标准长度：6000~6020mm。
- ③ 可定制表面处理。


④ L长度公差




⑤ 槽口详图




AOB02-H6060YE
AOB05-H6060YE




AOB02-H6060YF




AOB05-6060YA



AOB05-6060J




AOB05-60120J

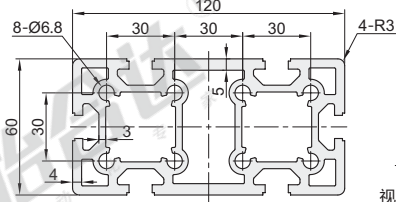


视角标准：第一视角

AOB05-120120J

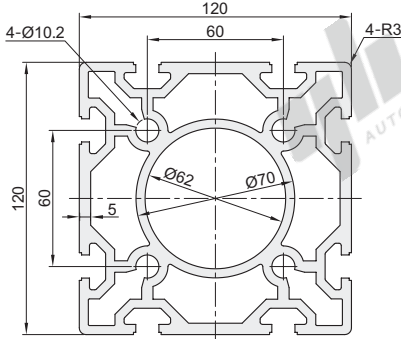

AOB05-120240J

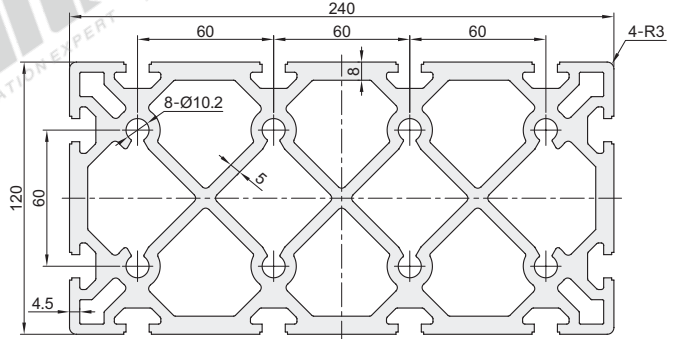

代码	规格	L 最小单位0.5	截面尺寸	每米重量Kg/m (理论值)	截面积 (mm ²)	截面惯性矩		抗弯截面模数	
						I_x	I_y	$W_{xmax}(mm^3)$	$W_{ymax}(mm^3)$
AOB02	H6060YE	50~6000	60×60	3.77	1370.08	48.54×10^4	48.54×10^4	16180.93	16180.93
	H6060YF			4.20	1525.92	51.77×10^4	51.77×10^4	13273.67	13273.67
	H6060YE			3.77	1370.08	48.54×10^4	48.54×10^4	16180.93	16180.93
AOB05	6060YA	50~6000	60×60	2.52	917.01	35.36×10^4	35.36×10^4	11787.47	11787.47
	6060J			4.08	1482.93	58.69×10^4	58.69×10^4	19564.70	19564.70
	60120J			7.05	2563.55	111.08×10^4	383.77×10^4	37028.03	63960.98
	120120J			12.48	4537.61	706.01×10^4	706.01×10^4	117667.85	117667.85
	120240J			26.73	9718.23	1574.40×10^4	5511.44×10^4	262399.87	459286.67



请按图示订货

型号	L 最小单位0.5	截面尺寸
代码 规格 AOB05 6060YA 6060H	50<D00	60×60

AOB05—6060YA—L1200

⑥ 可选加工

型号	L 最小单位0.5	可选加工 代码
代码 规格 AOB05 6060YA 6060	50<D00	LM RM DM

AOB05—6060YA—L1200—RM



可选加工

⑦ 端面螺孔加工

代码	技术说明 变更通孔为螺孔
LM(左端面) RM(右端面) DM(双端面)	<p>⑧ Ø12通孔变更为螺孔M14深36。 ⑨ Ø10.2通孔变更为螺孔M12深28。</p>

⑩ 可选加工见P603~608。

欧标60系列