

定位销

标准型 · P尺寸指定型 大头球面型

圆型		多棱型		材质		硬度	表面处理
Dm6	Dp6	Dm6	Dp6	国标	相当		
YFB11	YFB21	YFB61	YFB71	9CrWMn	SKS3	淬火硬度58~61HRC	—
YFB12	YFB22	YFB62	YFB72			淬火硬度58~61HRC, 镀层硬度850HV~	抛光
YFB13	YFB23	YFB63	YFB73				镀硬铬, 镀层厚度3~5μm
YFB14	YFB24	YFB64	YFB74				镀硬铬+抛光, 镀层厚度3~5μm
YFB15	YFB25	YFB65	YFB75	0Cr18Ni9	SUS304	—	—
YFB17	YFB27	YFB67	YFB77			镀层硬度850HV~	镀硬铬, 镀层厚度5~8μm
YFB18	YFB28	YFB68	YFB78	9Cr18Mo	SUS440C	淬火硬度48~53HRC	—
YFB19	YFB29	YFB69	YFB79			—	抛光




来图定制




圆型

YFB11/12/13/14/15/17/18/19
YFB21/22/23/24/25/27/28/29

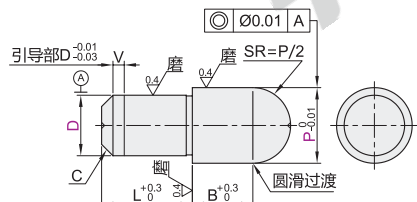

多棱型

YFB61/62/63/64/65/67/68/69
YFB71/72/73/74/75/77/78/79

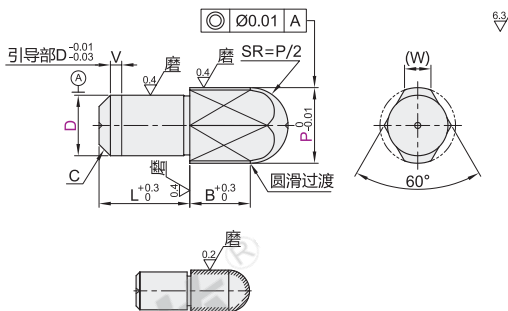

- ① SUS304可能经研磨或无中心孔。
- ② 由于带有中心孔, 因此P尺寸较小时, 几乎看不见球面部。
- ③ 工艺孔加工条件: $D \cdot L \cdot B \geq 4$ 且 $P \geq 6$ 。(工艺孔详细尺寸见产品简介)

- ① 抛光: 表示抛光加工部位。(多棱型切割面除外)



视角标准: 第一视角

型号		D公差		最小单位0.01	L	B	C	V	(W)
代码		m6	p6	P					
圆型		1		1.50~2.50	3		0.1	0	—
		2	+0.008 +0.002	+0.012 +0.006	4	3			1.2
		3				5	0.5		1.5
	Dm6	Dp6	Dm6	Dp6					1.8
	YFB11	YFB21	YFB61	YFB71					2.2
	YFB13	YFB23	YFB63	YFB73		6	1	1	3
	YFB15	YFB25	YFB65	YFB75	10				3.5
	YFB17	YFB27	YFB67	YFB77		8			4
	YFB18	YFB28	YFB68	YFB78			1.5		5.5
			10	+0.015 +0.006	+0.024 +0.015	15			
抛光品	抛光品	抛光品	抛光品			2			7
YFB12	YFB22	YFB62	YFB72						9
YFB14	YFB24	YFB64	YFB74						10
YFB19	YFB29	YFB69	YFB79						11
		16	+0.018 +0.007	+0.029 +0.018	22	10		2	12
		20	+0.021 +0.008	+0.035 +0.022	30	15	3		13