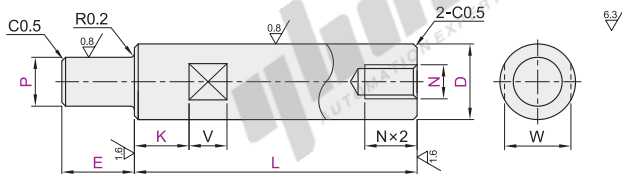


转轴

一端内螺纹型·带扳手槽型 一端台阶型




代码	类型		公差		材质		表面处理
			D	P	国标	相当	
MBD11	一端 内螺纹型	带扳手槽型	g6	g6	45	S45C	发黑
MBD12							无电解镀镍
MBD51			h7	h7			发黑
MBD71			h9	g6			
MBD91				h7			



D·P	g6	h7	h9
2~3	-0.002 -0.008	0 -0.010	0 -0.025
3.1~6	-0.004 -0.012	0 -0.012	0 -0.030
6.1~10	-0.005 -0.014	0 -0.015	0 -0.036
10.1~18	-0.006 -0.017	0 -0.018	0 -0.043
18.1~30	-0.007 -0.020	0 -0.021	0 -0.052
30.1~50	-0.009 -0.025	0 -0.025	0 -0.062

① 圆度·直线度·垂直度·同轴度，请参阅转轴产品简介。



g6

型号	最小单位0.1	最小单位1	N		带扳手槽型 K(最小单位1)	W	V
代码	D _{g6}	L	E	P			
6	18.0~300.0				3 4	5	
8	18.0~400.0			2≤P<D	3 4 5 6	7	10
10	18.0~500.0				4 5 6 8	8	
12	25.0~600.0				5 6 8	10	
13	25.0~600.0				5 6 8	11	
15	25.0~700.0				5 6 8 10	13	
16	25.0~700.0				5 6 8 10 12	15	
MBD11	17	35.0~800.0	1≤E≤P×6	4≤P<D	5 6 8 10 12	14	12
MBD12	18	35.0~800.0			5 6 8 10 12 16	15	
	20				5 6 8 10 12 16	17	
	22				5 6 8 10 12 16	19	
	25	45.0~800.0		8≤P<D	5 6 8 10 12 16	22	
	30	55.0~800.0			8 10 12 16 20	27	16
	35	65.0~800.0			8 10 12 16 20 24	30	
	40	75.0~800.0		15≤P<D	12 16 20 24 30	36	20
	50	95.0~800.0			16 20 24 30	41	

h7

型号	最小单位0.1	最小单位1	N		带扳手槽型 K(最小单位1)	W	V
代码	D _{h7}	L	E	P			
6	18.0~300.0				3 4	5	
8	18.0~400.0			2≤P<D	3 4 5 6	7	10
10	18.0~500.0				4 5 6	8	
12	25.0~600.0				5 6 8	10	
15	25.0~700.0			4≤P<D	5 6 8 10	13	12
MBD51	20	35.0~800.0	1≤E≤P×6	4≤P<D	5 6 8 10 12 16	17	
	25	45.0~800.0			5 6 8 10 12 16	22	
	30	55.0~800.0		8≤P<D	8 10 12 16 20	27	16
	35	65.0~800.0			8 10 12 16 20 24	30	
	40	75.0~800.0		15≤P<D	12 16 20 24 30	36	20
	50	95.0~800.0			16 20 24 30	41	

h9

型号	最小单位0.1	最小单位1	N		带扳手槽型 K(最小单位1)	W	V
代码	D _{h9}	L	E	P			
6	18.0~300.0				3 4	5	
8	18.0~400.0			2≤P<D	3 4 5 6	7	10
10	18.0~500.0				4 5 6	8	
12	25.0~600.0				5 6 8	10	
15	25.0~700.0			4≤P<D	5 6 8 10	13	12
MBD71	20	35.0~800.0	1≤E≤P×6	4≤P<D	5 6 8 10 12 16	17	
MBD91	25	45.0~800.0			5 6 8 10 12 16	22	
	30	55.0~800.0		8≤P<D	8 10 12 16 20	27	16
	35	65.0~800.0		15≤P<D	8 10 12 16 20 24	30	



请按图示订货

型号	D	L	E	P	N	K
MBD11	12	25~500	1≤E≤P×6	4≤P≤D	5 6 8	K=0或K≥1
MBD12	13	25~500			5 6 8	
MBD51	15	25~700			5 6 8 10	

MBD12—D12—L80—E20—P8—N6—K5






② 可选加工

型号	D	L	E	P	N	K	可选加工代码
MBD11	12	25~500	1≤E≤P×6	4≤P≤D	5 6 8	K=0或K≥1	③ LA()...
MBD12	13	25~500			5 6 8		
MBD51	15	25~700			5 6 8 10		

MBD12—D12—L80—E20—P8—N6—K5—LC



可选加工

代码	技术说明																
LC	变更L尺寸公差 	选型方法 LC ① $L < 400$ 变更为 $L \pm 0.05$ $L \geq 400$ 变更为 $L \pm 0.1$															
LA() LB()	增加1处平面LA()  增加2处平面LB() 	选型方法 LA10-G3 选型方法 LB10-J3-Y10-X3 ① 最小单位1 ② 指定G-J-X时，须为50以下 <table border="1"><thead><tr><th>D</th><th>H</th></tr></thead><tbody><tr><td>6~17</td><td>1</td></tr><tr><td>18~40</td><td>2</td></tr><tr><td>50</td><td>3</td></tr></tbody></table>	D	H	6~17	1	18~40	2	50	3							
D	H																
6~17	1																
18~40	2																
50	3																
KB() KC()	增加1处键槽KB()  增加2处键槽KC() 	选型方法 KB50-S10 选型方法 KC50-C8-F40-T10 ① 最小单位1 ② $KB+KC=0$, $KB+S \geq L$, $KC+T+K \geq L$ 键槽如下图形状  ③ 指定S-T-C时，须为100以下 ④ 键槽详情见转轴产品简介。 ⑤ 需要2处键槽时，请同时选择KB与KC															
PA()	增加轴端键槽(仅P部) 	选型方法 PA10 ① 最小单位1 ② $PA \geq 50$, $PA \geq E$, $P \leq 5$ 不适用 ③ 键槽详情见转轴产品简介。															
KD()	增加开口凸轮用槽 	选型方法 KD10 ① 最小单位1 ② 适用于右表D规格 <table border="1"><thead><tr><th>D</th><th>d</th><th>V2</th></tr></thead><tbody><tr><td>6</td><td>5</td><td>4</td></tr><tr><td>8</td><td>7</td><td>4</td></tr><tr><td>10</td><td>8</td><td>5</td></tr><tr><td>12</td><td>10</td><td>5</td></tr></tbody></table>	D	d	V2	6	5	4	8	7	4	10	8	5	12	10	5
D	d	V2															
6	5	4															
8	7	4															
10	8	5															
12	10	5															
MA() MB()	增加挡圈槽(附带挡圈) 	选型方法 MA10—MB10 ① 最小单位1 ② $MA(MB) = 4 \sim L/2$ ③ 挡圈槽尺寸见转轴产品简介。															



优惠价

数量	1~19	20~
价格	100%	另行报价

未税价(元)



交货期

5