


代码	类型		材质	表面处理
EUX51	薄壁型	未开槽	S45C	—
EUX52				发黑

*拆卸用螺孔

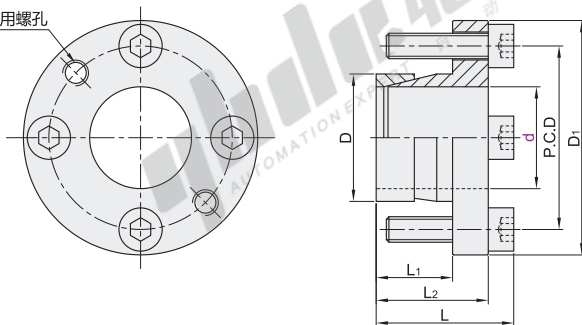

■ 推荐安装尺寸：

轴：h8

毂：H8



视角标准：第一视角

※拆卸用螺孔的螺栓与锁紧螺栓相同。

型号		D	D ₁	P.C.D	L ₁	L ₂	L	DIN912-12.9级锁紧螺钉			容许最大扭矩 (N·M)	容许轴向负载 (kN)
代码	d							规格	数量	锁紧扭矩 Ts(Nm)		
EUX51 EUX52	5	8	22	15							4.01	1.63
	6	9	23	16	9.5	13.5	16.5	M3×10		1.9	5.05	1.66
	8	11	25	18					3		8.4	2.01
	10	13	29	21							19	3.66
	12	15	31	23	11.5	16.5	20.5				24	3.23
	14	18	36	26							36	5.21
	15	19	37	27				M4×18		3.9	40	5.98
	16	20	38	28	14	20	24				42	5.17
	17	21	39	29							45	5.10
	19	24	42	32					4		48	5.03
	20	25	46	36							98	9.68
	22	26	47	37							109	9.90
	24	28	49	39	15	22	27	M5×20		7.8	121	9.98
	25	30	51	41							125	9.00
	30	35	56	46							139	9.20



请按图示订货



型号	
代码	d
EUX51	5
EUX52	6
	8

EUX51—d5



未税价(元)

● 优惠价

数量	1~99	100~
价格	100%	另行报价



交货期

5

Example
使用示例