




帽型谐波减速机

十字滑座组合型 高扭矩



代码	类型	结构形式
ZND04	高扭矩	十字滑座组合型

规格: 14/17




A-A剖面图

规格: 20/25/32/40/45/50/58/65

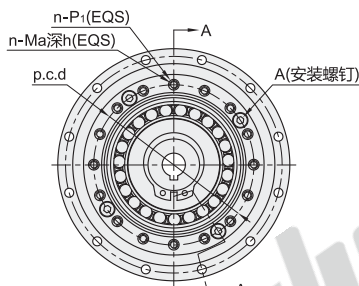

A-A剖面图



视角标准: 第一视角

型号	规格	减速比	L	n	Ma深h	P ₁	A 安装螺钉	p.c.d	B 安装螺钉	N	P ₂	P.C.D
ZND04	14	50 80 100	28.5	8	M3深5			44	2-M3	8		64
	17	50 80 100 120	32.5		M3深6	3.5	4-M3	54			3.5	74
	20		33.5					62	4-M3			84
	25		37	16	M4深8	4.5		77		12	4.5	102
	32	50 80 100 120 160	44		M5深8	5.5	4-M4	100	4-M4		5.5	132
	40		53		M6深10	6.6		122				158
	45		58.5	12	M8深10		4-M5	140	6-M4	18	6.6	180
	50		64	16	M8深11	9	8-M5	154	6-M5	12	9	200
	58	80 100 120 160	75.5	12			6-M6	178	8-M5			226
	65		83	16	M10深15	11	8-M6	195	8-M6	16	11	258

规格	T		W _{J59}		D _{h7}	D _{1H7}	D ₂	D _{3H7}	D ₄	D ₅	D _{6h6}	G ₁	G ₂
14	—	—	—	—	70	48	31	6	14	38	50	54×1.5	38×0.6
17					80	60	38	8	18	45	60	64×1.5	47×1
20	10.4		3	±0.013	90	70	45	9	21	53	70	73×2	54×1
25	12.8		4		110	88	56	11	26	66	85	90×1.8	67×1.5
32					142	114	73	14	26	86	110	118×2	88×1.5
40	16.3	+0.1 0	5	±0.015	170	140	90	14	32	106	135	143×2	107.67×1.78
45					190	158	101	19	32	119	155	165.2×2.4	123×1.8
50	21.8		6		214	175	113	19	32	133	170	183×2	135×2
58	24.8				240	203	131	22	40	154	195	208×2	158×1.78
65	27.3	+0.2	8	±0.018	276	232	150	24	48	172	215	235.2×1.8	175.2×1.8



型号	规格	减速比
代码	14	50 80 100
ZND04	17	50 80 100 120

ZND04—14—50

帽型谐波减速机

◀ 高扭矩系列性能参数表

规格	减速比	输入2000r/min 时的额定转矩		启动停止时的 容许峰值转矩		平均负载转矩 的容许最大值		瞬间容许 最大转矩		容许最高 输入转速	容许平均 输入转速
		N·m	kgf·m	N·m	kgf·m	N·m	kgf·m	N·m	kgf·m	r/min	r/min
14	50	6.8	0.7	24	2.4	9	0.9	46	4.7	8500	3500
	80	9.8	1	30	3.1	14	1.4	61	6.2		
	100	9.8	1	35	3.6	14	1.4	70	7.1		
17	50	20	2	44	4.5	34	3.5	91	9	7300	3500
	80	28	2.9	56	5.7	35	3.6	113	12		
	100	31	3.2	70	7.1	51	5.2	143	15		
	120	31	3.2	70	7.1	51	5.2	112	11		
20	50	33	3.4	73	7.4	44	4.5	127	13	6500	3500
	80	43	4.4	96	9.8	61	6.2	165	17		
	100	52	5.3	107	10.9	63	6.4	189	19		
	120	52	5.3	113	11.5	63	6.4	189	19		
25	50	51	5.2	127	13	72	7.3	242	25	5600	3500
	80	82	8.4	178	18	113	12	232	24		
	100	86	8.8	204	21	137	14	369	38		
	120	86	8.8	217	22	137	14	395	40		
32	50	99	10	281	29	140	14	497	51	4800	3500
	80	153	16	395	40	217	22	738	75		
	100	176	18	433	44	278	28	841	86		
	120	176	18	456	47	278	28	887	91		
40	50	176	18	484	49	278	28	887	91	4000	3000
	80	268	27	675	69	369	38	1270	130		
	100	343	35	738	75	484	49	1400	143		
	120	381	39	798	81	584	60	1528	156		
45	50	229	23	650	66	584	60	1235	126	3800	3000
	80	407	42	918	94	819	84	1651	168		
	100	457	47	982	100	806	82	2288	233		
	120	524	53	1070	109	819	84	2483	253		
50	50	484	49	1223	125	675	69	2418	247	3500	2500
	80	612	62	1274	130	866	88	2678	273		
	100	692	71	1404	143	1057	108	2678	273		
	120	692	71	1534	157	1096	112	3187	325		
58	50	714	73	1924	196	1003	102	3187	325	3000	2200
	80	905	92	2067	211	1378	141	4134	422		
	100	971	99	2236	228	1547	158	4329	442		
	120	971	99	2392	244	1573	161	4459	455		
65	50	971	99	2743	280	1352	138	4836	493	2800	1900
	80	1238	126	2990	305	1976	202	6179	631		
	120	1238	126	3263	333	2041	208	6179	631		
	160	1238	126	3419	349	2041	208	6179	631		